



SHPI

TRIED. TESTED.
AND
WANTED.

Shan Hua Plastic Industrial





SHPI

TRIED. TESTED.
AND
WANTED.

WWW.SHPI.COM.TW





The name SHPI is synonymous with dependability. SHPI promises to deliver what has been agreed with the client and beyond. In fact, SHPI has proven time and time again that it is able to show remarkable flexibility towards its customers without ever compromising its high standards of quality.

SHPI has been accredited with a wide array of pneumatic hoses, reels and connectors. Each product type offers diversity in type, material, size, usability, application, export standards, colour, packaging and design. SHPI attributes its success in developing this complete line of high-performance products to its manufacturing and export history that begun in 1983. SHPI's newest state-of-the-art 19,800 m2 manufacturing and warehousing facility, superior machinery, strict quality control processes and its strong team of men and women who have SHPI's customers best interests at heart have also been instrumental in achieving its levels of performance.

CONTACT INFORMATION

No.20 Jhongshan 7th St., Gueiren Dist ,
Tainan City 71152, Taiwan
Tel: +886-6-230-4567 Fax: +886-6-230-7799
Email: shpi@shanhua.com.tw
www.shpi.com.tw



CONTENTS

PNEUMATICS SERIES

Push-in Fitting Series

- 4 ONE-TOUCH FITTINGS
- 6 metric system
- 24 inch system
- 40 g type metric system

50 SPEED CONTROLLERS

- 52 metric system
- 53 inch system
- 54 g type metric system

56 COMPACT ONE-TOUCH FITTINGS

64 STOP FITTINGS

68 CHECK VALVES

72 HAND VALVES

78 SILENCERS

84 TUBE CUTTER

AIR BRAKE SERIES

D.O.T Push-in Fitting Series

- 89 CONNECTOR TYPE
- 93 ELBOW TYPE
- 100 UNION TYPE

ONE-TOUCH FITTINGS

Used in pneumatic piping &

Used for a wide variety of models to meet all needs.



PRODUCT DESCRIPTION

FEATURES/BENEFITS

- One-Touch push-to-connect configuration allows for an instant tubing connection
- All PC models are useful for piping in confined space, due to its six-angle wrench processing inside
- Immediate strong engineering plastic(POM) sleeve disconnection by pressing the sleeve and then simply removing tube from fitting
- Fittings are already equipped with Teflon-treatment or o-ring on the thread
- Nickel-plated brass body ensures anti-contamination properties for an extended product life

SPECIFICATION

- Applicable Fluid Type / AIR (No other type of gas or liquid)
- Working Pressure Range / 0~150PSI / 0~9.9Kgf/cm²(0~990KPa)
- Negative Pressure / -29.5in Hg / -750mmHg(-750Torr)
- Working Temperature Range / 32~140°F / 0~60°C

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items:

Please specify the following:


1. Series(Item)Number
2. Tube Outside Dia.
3. Thread Size

THREAD SIZE


01:1/8" / N01:1/8"NPT / G01:1/8"BSPP
02:1/4" / N02:1/4"NPT / G02:1/4"BSPP
03:3/8" / N03:3/8"NPT / G03:3/8"BSPP
04:1/2" / N04:1/2"NPT / G04:1/2"BSPP

Example of a request


PL series one touch fitting,
8mm tube with 1/4" BSPT thread

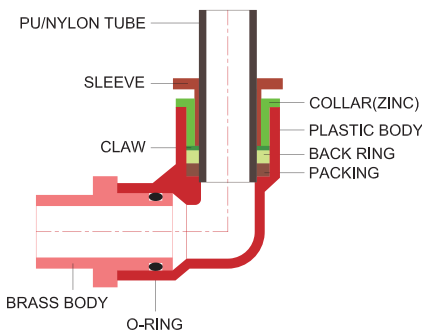

PC series one touch fitting,
1/4" tube with 1/4" NPT thread

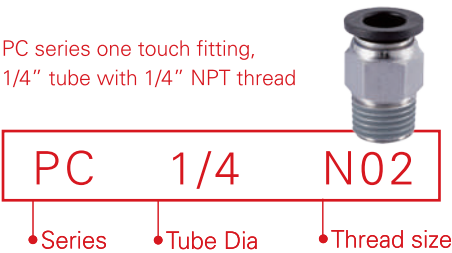


SC series G type one touch fitting,
8mm tube with 1/4" BSPP thread

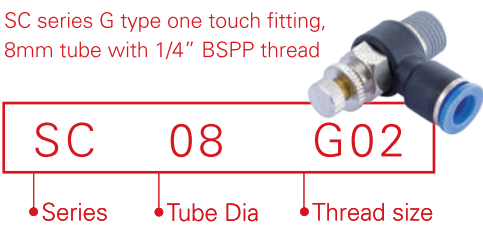

ONE-TOUCH FITTINGS

>METRIC SYSTEM

PC male straight

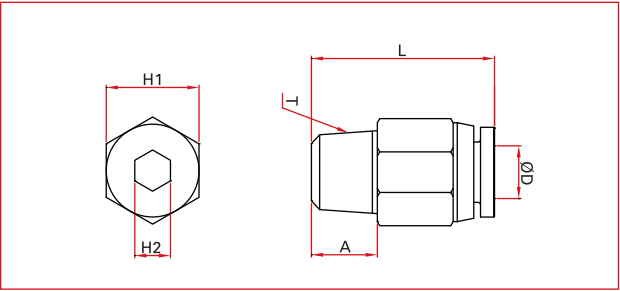


MODEL	ØD	T (Thread)	L	A	H1 (HEX)	H2 (HEX)	Q'ty per bag	Q'ty per box
PC 04-01	4	PT 1/8	20.5	8	10	3	10	100
PC 04-02	4	PT 1/4	19	10	14	3	10	100
PC 04-03	4	PT 3/8	20	11	17	3	10	100
PC 04-M5	4	M5xP0.8	20	3.5	10	2	10	100
PC 04-M6	4	M6xP1.0	20	4	10	2	10	100
PC 06-01	6	PT 1/8	21.3	8	12	4	10	100
PC 06-02	6	PT 1/4	23	10	14	4	10	100
PC 06-03	6	PT 3/8	21	11	17	4	10	100
PC 06-04	6	PT 1/2	25	14	21	4	10	50
PC 06-M5	6	M5xP0.8	21	3.5	12	2	10	100
PC 06-M6	6	M6xP1.0	21	4	12	2	10	100
PC 08-01	8	PT 1/8	26	8	14	5	10	100
PC 08-02	8	PT 1/4	25	10	14	5	10	100
PC 08-03	8	PT 3/8	22	11	17	5	10	100
PC 08-04	8	PT 1/2	26	14	21	5	10	50
PC 10-01	10	PT 1/8	30	8	17	5	10	100
PC 10-02	10	PT 1/4	31.5	10	17	6	10	50
PC 10-03	10	PT 3/8	29	11	17	8	10	50
PC 10-04	10	PT 1/2	27	14	21	8	10	50
PC 12-01	12	PT 1/8	31.5	8	21	5	10	50
PC 12-02	12	PT 1/4	32.8	10	21	6	10	50
PC 12-03	12	PT 3/8	30.6	11	21	8	10	50
PC 12-04	12	PT 1/2	31.6	14	21	8	10	50
PC 14-01	14	PT 1/8	31.5	8	22	5	10	50
PC 14-02	14	PT 1/4	33.5	10	22	6	10	50
PC 14-03	14	PT 3/8	34	11	22	8	10	50
PC 14-04	14	PT 1/2	32.5	14	22	10	10	50
PC 16-01	16	PT 1/8	33.5	8	24	5	10	50
PC 16-02	16	PT 1/4	35.5	10	24	6	10	50
PC 16-03	16	PT 3/8	36.5	11	24	8	5	25
PC 16-04	16	PT 1/2	36.5	14	24	10	5	25




Coiled Reinforced Polyurethane
Air Hose Assembly

POC Round male straight

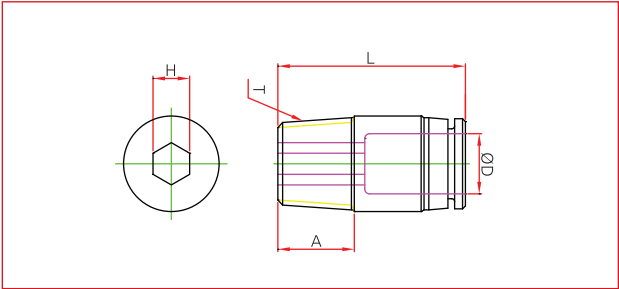

MODEL	ØD	T (Thread)	L	A	H (HEX)	Q'ty per bag	Q'ty per box
POC 04-01	4	PT 1/8	20.5	8	3	10	100
POC 04-02	4	PT 1/4	19	10	3	10	100
POC 04-03	4	PT 3/8	19.5	11	3	10	100
POC 04-M5	4	M5xP0.8	20.5	3.5	2	10	100
POC 04-M6	4	M6xP1.0	20.9	4	2	10	100
POC 06-01	6	PT 1/8	21	8	4	10	100
POC 06-02	6	PT 1/4	23	10	4	10	100
POC 06-03	6	PT 3/8	20.7	11	4	10	100
POC 06-04	6	PT 1/2	24.7	14	4	10	50
POC 06-M5	6	M5xP0.8	21	3.5	2	10	100
POC 06-M6	6	M6xP1.0	21	4	2	10	100
POC 08-01	8	PT 1/8	25.7	8	5	10	100
POC 08-02	8	PT 1/4	25	10	5	10	100
POC 08-03	8	PT 3/8	22	11	5	10	100
POC 08-04	8	PT 1/2	26	14	5	10	50
POC 10-01	10	PT 1/8	30	8	5	10	100
POC 10-02	10	PT 1/4	31.5	10	6	10	100
POC 10-03	10	PT 3/8	29	11	8	10	50
POC 10-04	10	PT 1/2	26.7	14	8	10	50
POC 12-01	12	PT 1/8	30.6	8	5	10	50
POC 12-02	12	PT 1/4	33	10	6	10	50
POC 12-03	12	PT 3/8	30.6	11	8	10	50
POC 12-04	12	PT 1/2	32.8	14	8	10	50
POC 16-03	16	PT 3/8	36.7	11	8	5	25
POC 16-04	16	PT 1/2	36.7	14	10	5	25

PZA union cross

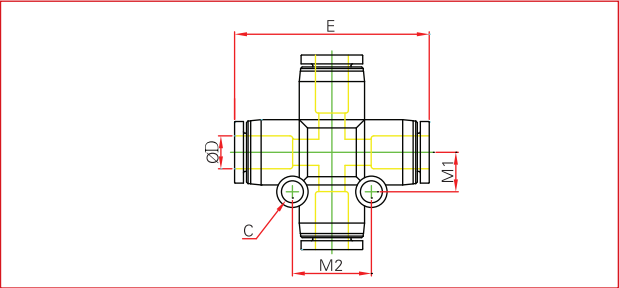


MODEL	ØD	M1	M2	E	C	Q'ty per bag	Q'ty per box
PZA 04	4	7.4	14.8	36.5	3.2	10	50
PZA 06	6	7.9	15.8	38	3.2	10	50
PZA 08	8	9	18	44.8	3.2	5	25
PZA 10	10	11.8	23.5	56.8	4.2	5	20
PZA 12	12	13.3	26.6	58.6	4.2	5	15

ONE-TOUCH FITTINGS

>METRIC SYSTEM

PL male elbow

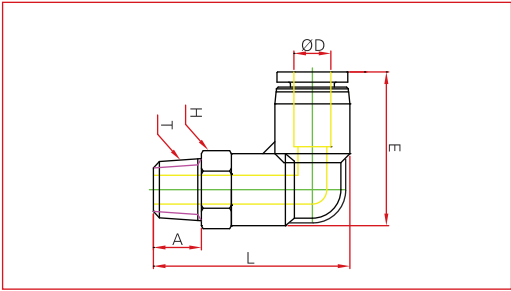


MODEL	ØD	T (Thread)	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PL 04-01	4	PT 1/8	23.5	30.3	8	10	10	100
PL 04-02	4	PT 1/4	23.5	32.7	10	14	10	100
PL 04-03	4	PT 3/8	23.5	34	11	17	10	100
PL 04-M5	4	M5xP0.8	23.5	26.5	4	10	10	100
PL 04-M6	4	M6xP1.0	23.5	27	4	10	10	100
PL 06-01	6	PT 1/8	24	31.5	8	12	10	100
PL 06-02	6	PT 1/4	24.5	33.9	10	14	10	50
PL 06-03	6	PT 3/8	24	35.2	11	17	10	50
PL 06-04	6	PT 1/2	24.5	38.7	14	21	10	50
PL 06-M5	6	M5xP0.8	24	28.2	4	12	10	100
PL 06-M6	6	M6xP1.0	24	28.7	4	12	10	100
PL 08-01	8	PT 1/8	29	35	8	14	10	50
PL 08-02	8	PT 1/4	29	37	10	14	10	50
PL 08-03	8	PT 3/8	29	38.3	11	17	10	50
PL 08-04	8	PT 1/2	29.5	41.8	14	21	10	50
PL 10-01	10	PT 1/8	36.5	41.8	8	17	10	50
PL 10-02	10	PT 1/4	36.5	43.8	10	17	10	50
PL 10-03	10	PT 3/8	36.5	44.8	11	17	10	50
PL 10-04	10	PT 1/2	36.5	48.3	14	21	5	25
PL 12-01	12	PT 1/8	39	44.3	8	19	5	25
PL 12-02	12	PT 1/4	39	46.3	10	17	5	25
PL 12-03	12	PT 3/8	39	48.3	11	17	5	25
PL 12-04	12	PT 1/2	39	50.8	14	21	5	25
PL 14-02	14	PT 1/4	39	47	10	19	5	25
PL 14-03	14	PT 3/8	39	49	11	19	5	25
PL 14-04	14	PT 1/2	39	51.5	14	21	5	25
PL 16-03	16	PT 3/8	41	51.7	11	19	5	25
PL 16-04	16	PT 1/2	41	54.2	14	21	5	25




Coiled Nylon Air Hose Assembly

PT male branch tee

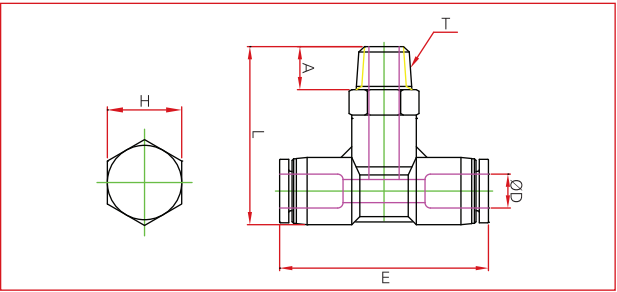

MODEL	ØD	T (Thread)	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PT 04-01	4	PT 1/8	37	29.9	8	10	10	50
PT 04-02	4	PT 1/4	37	32	10	14	10	50
PT 04-03	4	PT 3/8	37	33.8	11	17	10	50
PT 04-M5	4	M5xP0.8	37	26.3	4	10	10	100
PT 04-M6	4	M6xP1.0	37	26.8	4	10	10	100
PT 06-01	6	PT 1/8	38	31.5	8	12	10	50
PT 06-02	6	PT 1/4	38	34	10	14	10	50
PT 06-03	6	PT 3/8	38	35.6	11	17	10	50
PT 06-04	6	PT 1/2	38	39.2	14	21	5	25
PT 06-M5	6	M5xP0.8	38	28.4	4	12	10	50
PT 06-M6	6	M6xP1.0	38	28.6	4	12	10	50
PT 08-01	8	PT 1/8	44.5	35	8	14	10	50
PT 08-02	8	PT 1/4	44.5	37	10	14	10	50
PT 08-03	8	PT 3/8	44.5	38.6	11	17	10	50
PT 08-04	8	PT 1/2	44.5	42.9	14	21	5	25
PT 10-01	10	PT 1/8	56.5	42.2	8	17	5	25
PT 10-02	10	PT 1/4	56.5	44.5	10	17	5	25
PT 10-03	10	PT 3/8	56.5	45.5	11	17	5	25
PT 10-04	10	PT 1/2	56.5	48.9	14	21	5	20
PT 12-01	12	PT 1/8	58	44.2	8	19	5	25
PT 12-02	12	PT 1/4	58	46.3	10	19	5	25
PT 12-03	12	PT 3/8	58	48.3	11	19	5	25
PT 12-04	12	PT 1/2	58	50.5	14	21	5	20
PT 14-02	14	PT 1/4	60.5	47.4	10	19	5	20
PT 14-03	14	PT 3/8	60.5	49.6	11	19	5	20
PT 14-04	14	PT 1/2	60.5	52	14	21	5	20
PT 16-03	16	PT 3/8	61.5	55.7	11	19	3	12
PT 16-04	16	PT 1/2	61.5	58.5	14	21	3	12

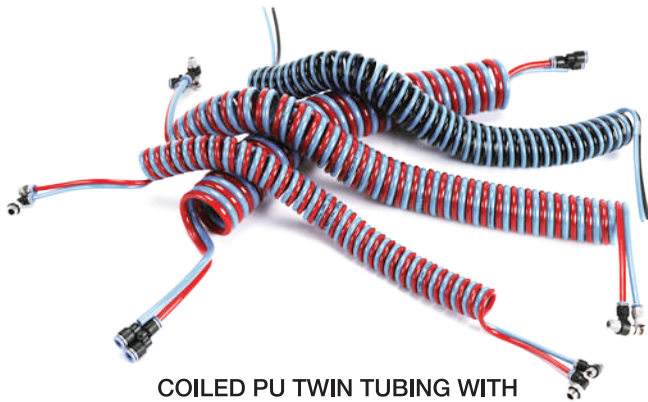


COILED PU TWIN TUBING WITH ONE-TOUCH FITTING

ONE-TOUCH FITTINGS


>METRIC SYSTEM

PST male run tee

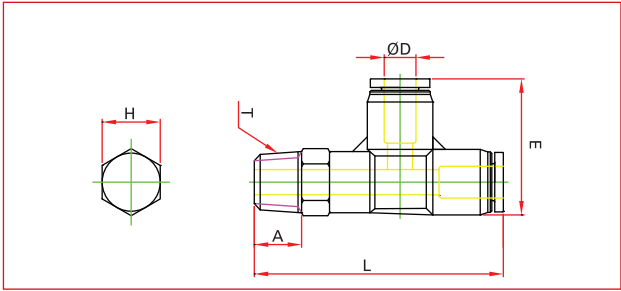


MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PST 04-01	4	PT 1/8	43	24	8	10	10	50
PST 04-02	4	PT 1/4	45	24	10	14	10	50
PST 04-03	4	PT 3/8	46	24	11	17	10	50
PST 04-M5	4	M5xP0.8	39	24	4	10	10	100
PST 04-M6	4	M6xP1.0	39	24	4	10	10	100
PST 06-01	6	PT 1/8	44	25.5	8	12	10	50
PST 06-02	6	PT 1/4	46.5	25.5	10	14	10	50
PST 06-03	6	PT 3/8	47.5	25.5	11	17	10	50
PST 06-04	6	PT 1/2	50.5	25.5	14	21	10	50
PST 06-M5	6	M5xP0.8	41	25.5	4	12	10	100
PST 06-M6	6	M6xP1.0	41	25.5	4	12	10	100
PST 08-01	8	PT 1/8	50.5	29.5	8	14	10	50
PST 08-02	8	PT 1/4	52.5	29.5	10	14	10	50
PST 08-03	8	PT 3/8	53.5	29.5	11	17	10	50
PST 08-04	8	PT 1/2	56.5	29.5	14	21	5	25
PST 10-01	10	PT 1/8	62	38	8	17	5	25
PST 10-02	10	PT 1/4	64	38	10	17	5	25
PST 10-03	10	PT 3/8	65	38	11	17	5	25
PST 10-04	10	PT 1/2	68	38	14	21	5	20
PST 12-01	12	PT 1/8	63.5	40	8	17	5	25
PST 12-02	12	PT 1/4	65.5	40	10	17	5	25
PST 12-03	12	PT 3/8	66.5	40	11	17	5	25
PST 12-04	12	PT 1/2	69.5	40	14	21	5	20
PST 14-02	14	PT 1/4	66	42	10	19	5	20
PST 14-03	14	PT 3/8	67	42	11	19	5	20
PST 14-04	14	PT 1/2	71.5	42	14	21	5	20

PWJ plug-in Y

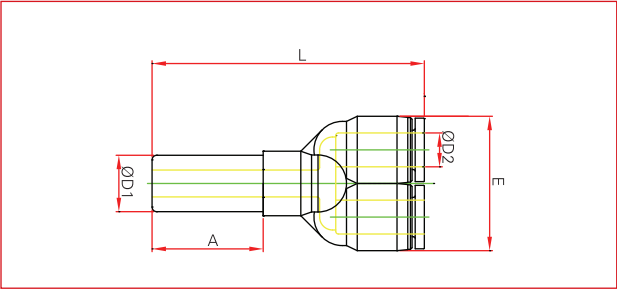



MODEL	ØD1	ØD2	L	A	E	Q'ty per bag	Q'ty per box
PWJ 0604	6	4	52.5	21	22	10	50
PWJ 0806	8	6	56	23.5	26	10	50
PWJ 1008	10	8	63.5	25	29.5	5	25
PWJ 1210	12	10	72	28	37	5	25

PWT male Y

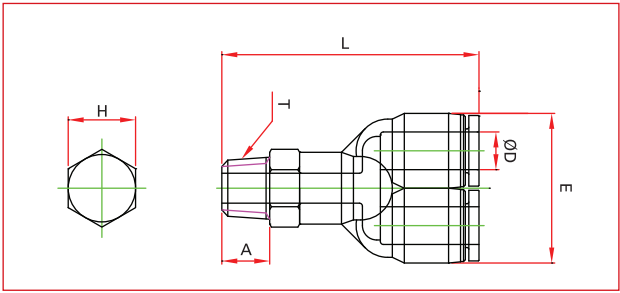

MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PWT 04-01	4	PT 1/8	42	22	8	10	10	50
PWT 04-02	4	PT 1/4	45	22	10	14	10	50
PWT 04-03	4	PT 3/8	46	22	11	17	10	50
PWT 04-M5	4	M5xP 0.8	39	22	4	10	10	100
PWT 04-M6	4	M6xP 1.0	39	22	4	10	10	100
PWT 06-01	6	PT 1/8	45	26	8	12	10	50
PWT 06-02	6	PT 1/4	47	26	10	14	10	50
PWT 06-03	6	PT 3/8	48	26	11	17	10	50
PWT 06-04	6	PT 1/2	51	26	14	21	5	25
PWT 06-M5	6	M5xP 0.8	41	26	4	12	10	50
PWT 06-M6	6	M6xP 1.0	41	26	4	12	10	50
PWT 08-01	8	PT 1/8	47	30	8	14	10	50
PWT 08-02	8	PT 1/4	49	30	10	14	10	50
PWT 08-03	8	PT 3/8	50	30	11	17	10	50
PWT 08-04	8	PT 1/2	54	30	14	21	5	25
PWT 10-01	10	PT 1/8	57	37	8	17	5	25
PWT 10-02	10	PT 1/4	59	37	10	17	5	25
PWT 10-03	10	PT 3/8	60	37	11	17	5	25
PWT 10-04	10	PT 1/2	63	37	14	21	5	20
PWT 12-01	12	PT 1/8	60	42.5	8	19	5	20
PWT 12-02	12	PT 1/4	62	42.5	10	19	5	20
PWT 12-03	12	PT 3/8	63	42.5	11	19	5	20
PWT 12-04	12	PT 1/2	66	42.5	14	21	5	20
PWT 16-03	16	PT 3/8	65.5	51.5	11	19	3	15
PWT 16-04	16	PT 1/2	69	51.5	14	21	3	15

PPF cap

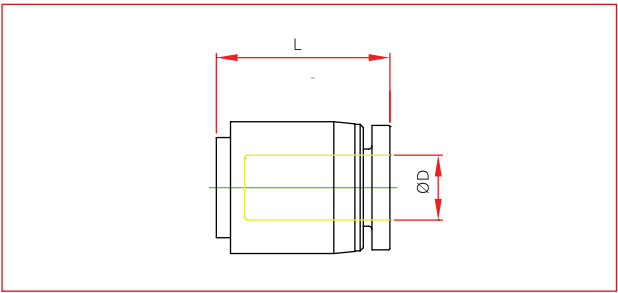


MODEL	ØD	L	Q'ty per bag	Q'ty per box
PPF 04	4	18	10	100
PPF 06	6	19	10	100
PPF 08	8	21	10	100
PPF 10	10	24	10	50
PPF 12	12	25	10	50
PPF 16	16	27.5	5	25

ONE-TOUCH FITTINGS


>METRIC SYSTEM

PLL extended male elbow

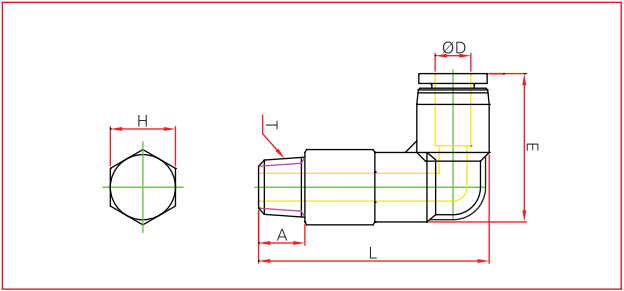


MODEL	ØD	T (Thread)	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PLL 04-01	4	PT 1/8	23.5	40.3	8	10	10	50
PLL 04-02	4	PT 1/4	23.5	44	10	14	10	50
PLL 04-03	4	PT 3/8	23.5	44	11	17	10	50
PLL 04-M5	4	M5x P0.8	23.5	37	4	10	10	100
PLL 04-M6	4	M6x P1.0	23.5	37	4	10	10	100
PLL 06-01	6	PT 1/8	25	43.5	8	12	10	50
PLL 06-02	6	PT 1/4	25	45.9	10	14	10	50
PLL 06-03	6	PT 3/8	25	47.2	11	17	10	50
PLL 06-04	6	PT 1/2	25	50.7	14	21	10	50
PLL 06-M5	6	M5x P0.8	25	41.2	4	12	10	100
PLL 06-M6	6	M6x P1.0	25	41.2	4	12	10	100
PLL 08-01	8	PT 1/8	30	49	8	14	10	50
PLL 08-02	8	PT 1/4	30	51	10	14	10	50
PLL 08-03	8	PT 3/8	30	52.3	11	17	10	50
PLL 08-04	8	PT 1/2	30	55.8	14	21	5	25
PLL 10-01	10	PT 1/8	36	58.5	8	17	5	25
PLL 10-02	10	PT 1/4	36	60.8	10	17	5	25
PLL 10-03	10	PT 3/8	36	61.8	11	17	5	25
PLL 10-04	10	PT 1/2	36	65.3	14	21	5	25
PLL 12-02	12	PT 1/4	38.5	70	10	19	5	25
PLL 12-03	12	PT 3/8	38.5	68.3	11	19	5	25
PLL 12-04	12	PT 1/2	38.5	68	14	21	5	25

PIG

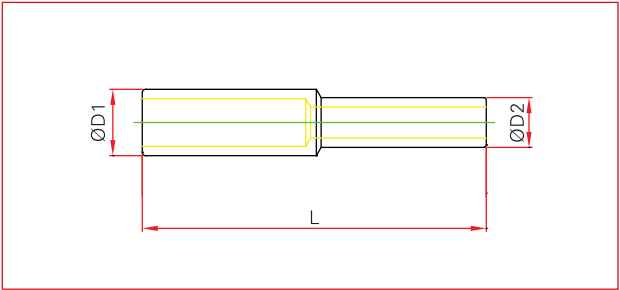


MODEL	ØD1	ØD2	L	Q'ty per bag	Q'ty per box
PIG 06-04	6	4	36	10	100
PIG 08-04	8	4	37.5	10	100
PIG 08-06	8	6	39	10	100
PIG 10-06	10	6	41.5	10	100
PIG 10-08	10	8	43	10	100
PIG 12-08	12	8	44.5	10	100
PIG 12-10	12	10	48	10	100
PIG 16-12	16	12	54	10	100

PLF extended female elbow

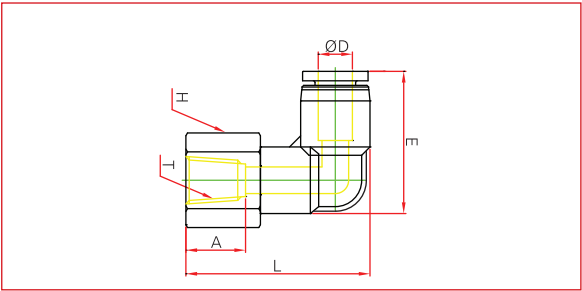

MODEL	ØD	T (Thread)	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
PLF 04-01	4	PT 1/8	28.5	23.5	8	14	10	50
PLF 04-02	4	PT 1/4	31	23.5	11	17	10	50
PLF 04-M5	4	M5xP0.8	24.5	23.5	7	10	10	100
PLF 04-M6	4	M6xP1.0	24.5	23.5	7	10	10	100
PLF 06-01	6	PT 1/8	29.5	25	8	14	10	50
PLF 06-02	6	PT 1/4	32	25	10	17	10	50
PLF 06-03	6	PT 3/8	33.5	25	11	21	10	50
PLF 06-04	6	PT 1/2	36.5	25	14	24	10	50
PLF 06-M5	6	M5xP0.8	25.5	25	7	10	10	100
PLF 06-M6	6	M6xP1.0	25.5	25	7	10	10	100
PLF 08-01	8	PT 1/8	33	29.5	8	14	10	50
PLF 08-02	8	PT 1/4	35.5	29.5	10	17	10	50
PLF 08-03	8	PT 3/8	37	29.5	11	21	10	50
PLF 08-04	8	PT 1/2	40	29.5	14	24	5	25
PLF 10-01	10	PT 1/8	34.5	36	8	17	5	25
PLF 10-02	10	PT 1/4	41	36	10	17	5	25
PLF 10-03	10	PT 3/8	43	36	11	21	5	25
PLF 10-04	10	PT 1/2	46	36	14	24	5	20
PLF 12-01	12	PT 1/8	44 5	38.5	11	19	5	20
PLF 12-02	12	PT 1/4	44.5	38.5	10	19	5	20
PLF 12-03	12	PT 3/8	45	39.5	12	21	5	20
PLF 12-04	12	PT 1/2	49	37.5	14	24	5	20

PUC union straight

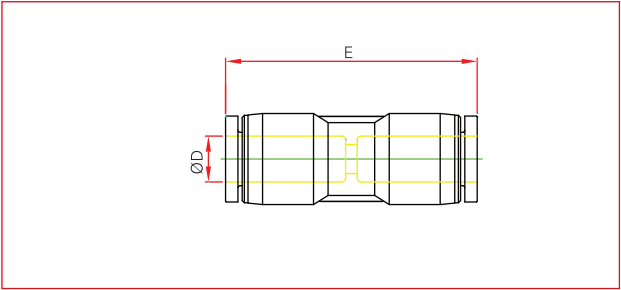


MODEL	ØD	E	Q'ty per bag	Q'ty per box
PUC 04	4	33	10	100
PUC 06	6	34.5	10	100
PUC 08	8	38.5	10	50
PUC 10	10	48.5	10	50
PUC 12	12	49	5	25
PUC 14	14	51.5	5	25
PUC 16	16	63.5	5	25

ONE-TOUCH FITTINGS


>METRIC SYSTEM

PUT union tee

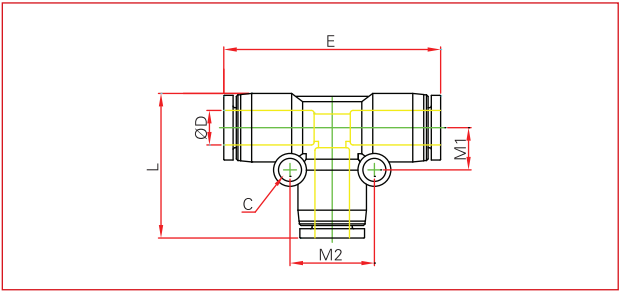


MODEL	ØD	E	L	M1	M2	C	Q'ty per bag	Q'ty per box
PUT 04	4	36.5	24	7	14	3.2	10	100
PUT 06	6	37.5	25.5	8	16	3.2	10	50
PUT 08	8	44.5	29.5	9	18	3.2	10	50
PUT 10	10	57	37	12	24	4.2	5	25
PUT 12	12	58	39	13.5	27	4.2	5	25
PUT 14	14	60.7	42.5	13.5	27	4.2	5	20
PUT 16	16	64	45	14	28	4.2	3	15

PGT reducer tee

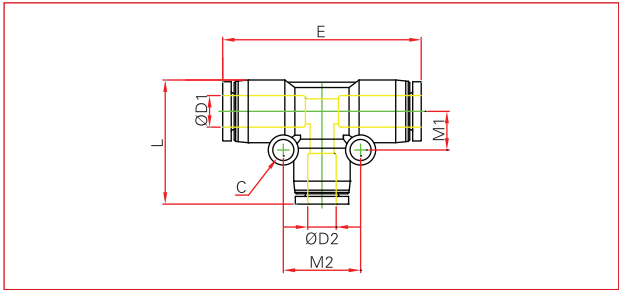


MODEL	ØD1	ØD2	L	E	C	M1	M2	Q'ty per bag	Q'ty per box
PGT 0406	4	6	24.5	37.5	3.2	6.9	13.8	10	50
PGT 0408	4	8	28	41	3.2	8.3	16.6	10	50
PGT 0604	6	4	25.5	38	3.2	8	13.8	10	50
PGT 0608	6	8	28	41	3.2	8.3	16.6	10	50
PGT 0610	6	10	34	44.5	4.2	8.4	22	10	50
PGT 0804	8	4	29.5	43.5	3.2	9	16.6	10	50
PGT 0806	8	6	29.5	43.5	3.2	9	16.6	10	50
PGT 0810	8	10	34.5	48	4.2	9.2	22	5	25
PGT 0812	8	12	35.2	48.5	4.2	9.2	24.6	5	25
PGT 1006	10	6	31.5	53	4.2	11	16.8	5	25
PGT 1008	10	8	32	56	4.2	11	18.4	5	25
PGT 1012	10	12	38.2	58	4.2	11	24.6	5	25
PGT 1208	12	8	35	56	4.2	12.3	18.4	5	25
PGT 1210	12	10	39	57.5	4.2	12.3	18.4	5	25
PGT 1412	14	12	41	60.5	4.2	14.5	26.5	5	20
PGT 1612	16	12	44.5	65	4.2	14.6	24.6	3	15
PGT 1614	16	14	46	65	4.2	14	28	3	15

PG reducer

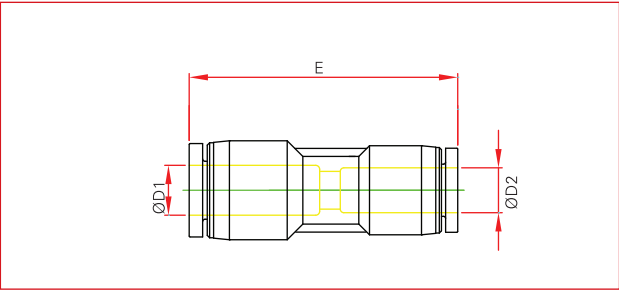

MODEL	ØD1	ØD2	E	Q'ty per bag	Q'ty per box
PG 0604	6	4	34	10	100
PG 0804	8	4	36.5	10	100
PG 0806	8	6	36.5	10	50
PG 1006	10	6	43	10	50
PG 1008	10	8	43	10	50
PG 1208	12	8	47	10	50
PG 1210	12	10	49	5	25
PG 1412	14	12	51	5	25
PG 1612	16	12	64	5	25
PG 1614	16	14	65	5	25

PKG reducer triple
branch union

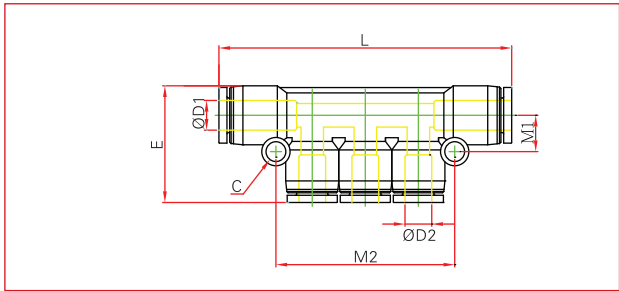


MODEL	ØD1	ØD2	M1	M2	L	E	C	Q'ty per bag	Q'ty per box
PKG 0404	4	4	9	41.5	59	27	3.2	5	25
PKG 0606	6	6	9	41.5	59.5	27	3.2	5	25
PKG 0808	8	8	12	47.8	79.5	33	4.2	5	20
PKG 1010	10	10	12	56.5	90.9	37.5	3.5	5	15
PKG 1212	12	12	15.5	67.5	99.4	39.5	4.5	5	15
PKG 0604	6	4	9	41.5	59.5	27	3.2	5	25
PKG 0804	8	4	9	41.5	61	27	3.2	5	25
PKG 0806	8	6	9	41.5	61	27	3.2	5	25
PKG 1006	10	6	12	47.8	81	32.5	4.2	5	25
PKG 1008	10	8	12	47.8	81	32.5	4.2	5	20
PKG 1208	12	8	15.5	59.5	91.8	37	4.5	5	15
PKG 1210	12	10	15.5	59.5	91.8	38	4.5	5	15

ONE-TOUCH FITTINGS



>METRIC SYSTEM

PCF female straight

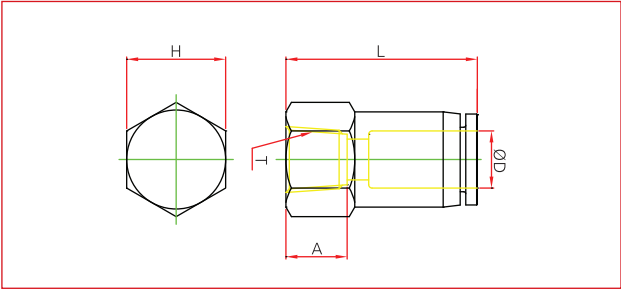


MODEL	ØD	T	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PCF 04-M5	4	M5x P0.8	21	5	10	10	100
PCF 04-01	4	PT 1/8	23.5	8.5	14	10	100
PCF 04-02	4	PT 1/4	26.5	10	17	10	100
PCF 06-M5	6	M5x P0.8	20.5	5	12	10	100
PCF 06-01	6	PT 1/8	25	8.5	14	10	100
PCF 06-02	6	PT 1/4	27	10	17	10	100
PCF 06-03	6	PT 3/8	28	12	20	10	50
PCF 06-04	6	PT 1/2	30	13	24	10	50
PCF 08-01	8	PT 1/8	26	8.5	14	10	100
PCF 08-02	8	PT 1/4	28.5	10	17	10	100
PCF 08-03	8	PT 3/8	30	12	20	10	50
PCF 08-04	8	PT 1/2	32	13	24	10	50
PCF 10-01	10	PT 1/8	30	8.5	17	10	50
PCF 10-02	10	PT 1/4	32	11	17	10	50
PCF 10-03	10	PT 3/8	33	11	20	10	50
PCF 10-04	10	PT 1/2	35	13	24	10	50
PCF 12-02	12	PT 1/4	35	11	21	10	50
PCF 12-03	12	PT 3/8	35	12	21	10	50
PCF 12-04	12	PT 1/2	37.5	14	24	5	25
PCF 16-03	16	PT 3/8	36.5	11	24	5	25
PCF 16-04	16	PT 1/2	38.5	13	24	5	25

PY union y

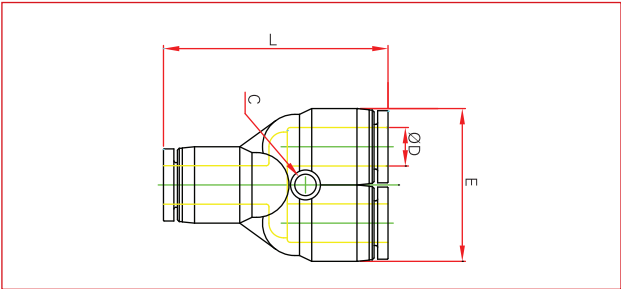


MODEL	ØD	L	E	C	Q'ty per bag	Q'ty per box
PY 04	4	35.5	22	3.2	10	100
PY 06	6	37	26	3.2	10	50
PY 08	8	39.5	30	3.2	10	50
PY 10	10	50.5	37	4.2	5	25
PY 12	12	52.5	42	4.2	5	25
PY 16	16	55.5	51.5	4.2	3	15

PMF bulkhead
female straight

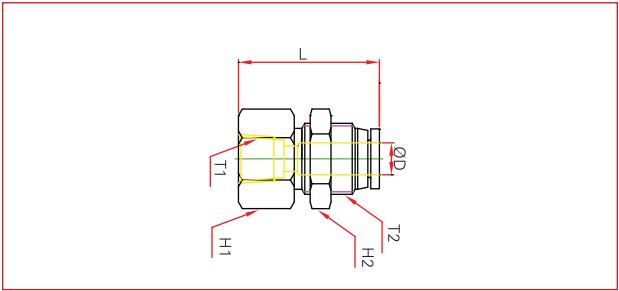

MODEL	ØD	T1 (Thread)	T2	L	H1 (HEX)	H2 (HEX)	Q'ty per bag	Q'ty per box
PMF 04-01	4	PT 1/8	M12xP1.0	24	14	14	10	100
PMF 04-02	4	PT 1/4	M12xP1.0	26.5	17	14	10	100
PMF 06-01	6	PT 1/8	M14xP1.0	25	17	17	10	100
PMF 06-02	6	PT 1/4	M14xP1.0	27	17	17	10	100
PMF 06-03	6	PT 3/8	M14xP1.0	28	19	17	10	50
PMF 08-01	8	PT 1/8	M16xP1.0	26	19	19	10	50
PMF 08-02	8	PT 1/4	M16xP1.0	29	19	19	10	50
PMF 08-03	8	PT 3/8	M16xP1.0	29.5	19	19	10	50
PMF 08-04	8	PT 1/2	M16xP1.0	31.5	24	19	5	25
PMF 10-01	10	PT 1/8	M20xP1.0	30.5	24	24	10	50
PMF 10-02	10	PT 1/4	M20xP1.0	33	24	24	10	50
PMF 10-03	10	PT 3/8	M20xP1.0	34	24	24	10	50
PMF 10-04	10	PT 1/2	M20xP1.0	37	24	24	5	25
PMF 12-02	12	PT 1/4	M22xP1.0	34	27	27	5	25
PMF 12-03	12	PT 3/8	M22xP1.0	34	27	27	5	25
PMF 12-04	12	PT 1/2	M22xP1.0	36	27	27	5	25

PW reducer y

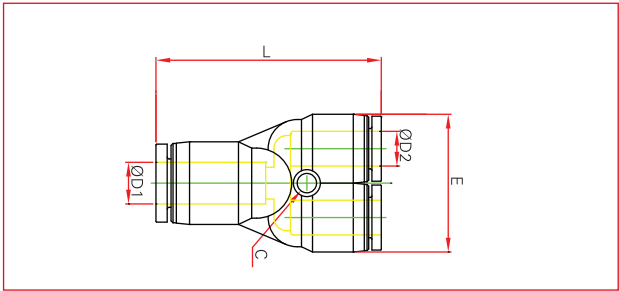


MODEL	ØD1	ØD2	L	E	C	Q'ty per bag	Q'ty per box
PW 0604	6	4	36	22	3.2	10	100
PW 0804	8	4	37	26	3.2	10	50
PW 0806	8	6	37	26	3.2	10	50
PW 1006	10	6	43.5	29	3.2	10	50
PW 1008	10	8	43	29	3.2	10	50
PW 1208	12	8	50	36.5	4.2	5	25
PW 1210	12	10	51	36.5	4.2	5	25
PW 1612	16	12	54.5	51.5	4.2	5	15
PW 1614	16	14	55	51.5	4.2	5	15

ONE-TOUCH FITTINGS


>METRIC SYSTEM

PMM bulkhead union

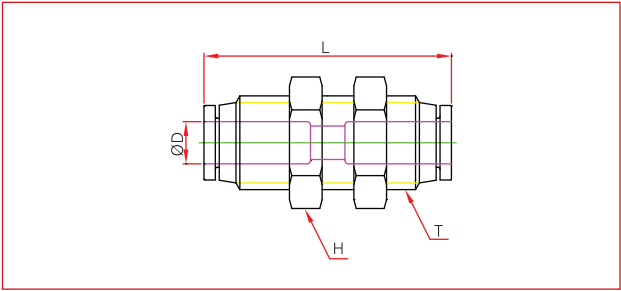


MODEL	ØD	T	L	H (HEX)	Q'ty per bag	Q'ty per box
PMM 04	4	M12xP1.0	30.5	14	10	100
PMM 06	6	M14xP1.0	31	17	10	100
PMM 08	8	M16xP1.0	35	19	10	50
PMM 10	10	M20xP1.0	41	24	5	25
PMM 12	12	M22xP1.0	44	27	5	25

PP plug

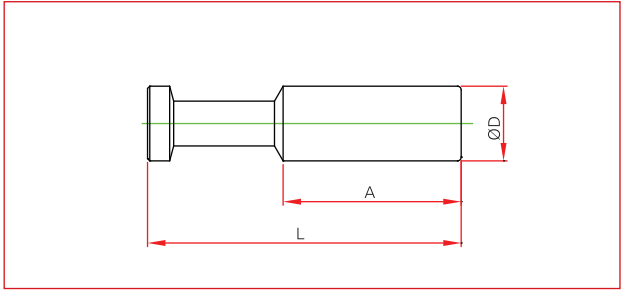


MODEL	ØD	L	A	Q'ty per bag	Q'ty per box
PP 04	4	28	15	10	100
PP 06	6	33	17	10	100
PP 08	8	36	18	10	100
PP 10	10	42.5	22	10	100
PP 12	12	43	22	10	100
PP 16	16	49	24.5	10	50

PLM bulkhead union elbow

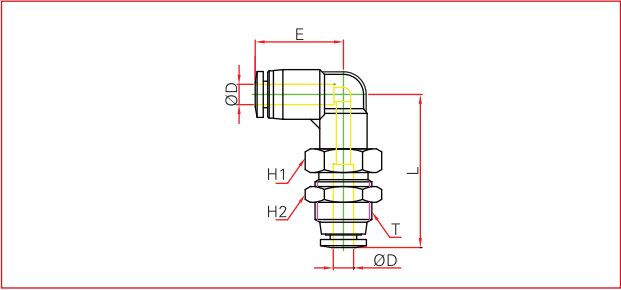


MODEL	ØD	T	L	E	H1 (Hex)	H2 (Hex)	Q'ty per bag	Q'ty per box
PLM 04	4	M12xP1.0	33.5	23	14	14	10	50
PLM 06	6	M14xP1.0	38	24	17	17	10	50
PLM 08	8	M16xP1.0	43	29	19	19	10	50
PLM 10	10	M20xP1.0	50	36	24	24	5	25
PLM 12	12	M22xP1.0	57	38	27	27	5	25

PLJ plug-in elbow

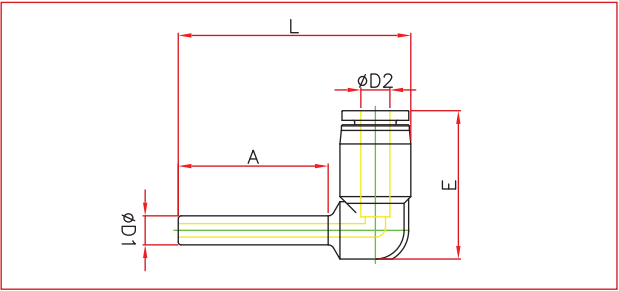

MODEL	ØD1	ØD2	L	E	A	Q'ty per bag	Q'ty per box
PLJ 04	4	4	38	23.5	20.5	10	100
PLJ 06	6	6	41	24	22	10	100
PLJ 08	8	8	46.5	29.5	24	10	50
PLJ 10	10	10	55	36	25.5	10	50
PLJ 12	12	12	59	37	27	5	25
PLJ 16	16	16	72	45	32.5	5	25
PLJ 0604	6	4	39.5	23.5	22	10	100
PLJ 0806	8	6	43.5	24	24	10	100
PLJ 1008	10	8	49	29.5	25.5	10	50
PLJ 1210	12	10	59.5	36	27	5	25

PH male banjo

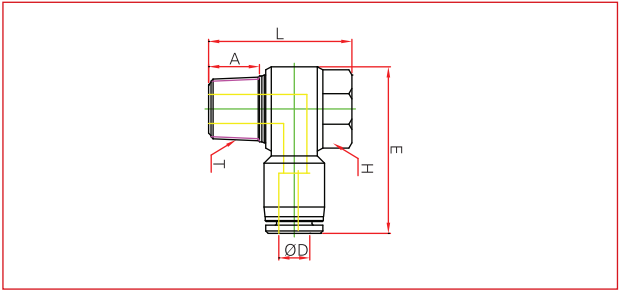


MODEL	ØD	T (Thread)	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PH 04-01	4	PT 1/8	29	23.6	7	12	10	50
PH 04-02	4	PT 1/4	34	26.5	8.5	14	10	50
PH 04-M5	4	M5xP0.8	25	17.5	4	8	10	100
PH 04-M6	4	M6xP1.0	25	17.5	4	8	10	100
PH 06-01	6	PT 1/8	30	23	7	12	10	50
PH 06-02	6	PT 1/4	34	26.5	9.5	14	10	50
PH 06-03	6	PT 3/8	38	32	10.5	19	5	25
PH 06-04	6	PT 1/2	46	39.1	14	24	5	25
PH 06-M5	6	M5xP0.8	26.5	17.5	4	8	10	100
PH 06-M6	6	M6xP1.0	26.5	17.5	4	8	10	100
PH 08-01	8	PT 1/8	32	24	7	12	10	50
PH 08-02	8	PT 1/4	37	26.5	9.5	14	10	50
PH 08-03	8	PT 3/8	40	32	10.5	19	5	25
PH 08-04	8	PT 1/2	46	39.1	14	24	5	25
PH 10-01	10	PT 1/8	37.5	24	7	12	10	50
PH 10-02	10	PT 1/4	41	26.5	9.5	14	10	50
PH 10-03	10	PT 3/8	43.5	32	10.5	19	5	25
PH 10-04	10	PT 1/2	50	39.1	14	24	5	20
PH 12-02	12	PT 1/4	42.5	26.5	8.5	14	5	25
PH 12-03	12	PT 3/8	46	32	10.5	19	5	25
PH 12-04	12	PT 1/2	50	39.1	14	24	5	20

ONE-TOUCH FITTINGS



>METRIC SYSTEM

PHF female banjo

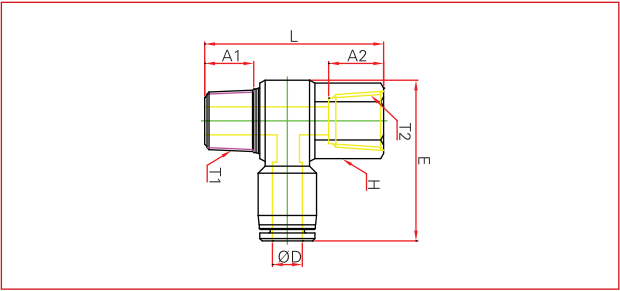


MODEL	ØD	T1	T2	L	E	A1	A2	H (Hex)	Q'ty per bag	Q'ty per box
PHF 04-M5	4	M5x P0.8	M5xP0.8	20	25	4	5	8	10	100
PHF 04-M6	4	M6x P1.0	M6xP1.0	20.8	25	4	5	8	10	100
PHF 04-01	4	PT 1/8	PT 1/8	28	29.5	7.5	6.5	14	10	50
PHF 04-02	4	PT 1/4	PT 1/4	33	33	9.5	8.5	17	10	50
PHF 06-M5	6	M5x P0.8	M5xP0.8	20	26.5	4	5	8	10	100
PHF 06-M6	6	M6x P1.0	M6xP1.0	20.8	26.5	4	5	8	10	100
PHF 06-01	6	PT 1/8	PT 1/8	28	30	7.5	6.5	14	10	50
PHF 06-02	6	PT 1/4	PT 1/4	33	34	9.5	8.5	17	10	50
PHF 06-03	6	PT 3/8	PT 3/8	40	38	10.5	9.5	21	5	25
PHF 06-04	6	PT 1/2	PT 1/2	46.6	46	14	11.5	24	5	25
PHF 08-01	8	PT 1/8	PT 1/8	28	32.5	7.5	6.5	14	10	50
PHF 08-02	8	PT 1/4	PT 1/4	33	37.5	9.5	8.5	17	10	50
PHF 08-03	8	PT 3/8	PT 3/8	38.9	40	10.5	9.5	21	5	25
PHF 08-04	8	PT 1/2	PT 1/2	46.6	46	14	11.5	24	5	25
PHF 10-01	10	PT 1/8	PT 1/8	28	37	7.5	6.5	14	5	25
PHF 10-02	10	PT 1/4	PT 1/4	33	41	9.5	8.5	17	5	25
PHF 10-03	10	PT 3/8	PT 3/8	38.9	43.5	10.5	9.5	21	5	25
PHF 10-04	10	PT 1/2	PT 1/2	46.6	49.5	14	11.5	24	5	15
PHF 12-02	12	PT 1/4	PT 1/4	33	42.5	9.5	8.5	17	5	25
PHF 12-03	12	PT 3/8	PT 3/8	38.9	46	10.5	9.5	21	5	20
PHF 12-04	12	PT 1/2	PT 1/2	46.6	50	14	11.5	24	5	15

PGJ plug-in reducer

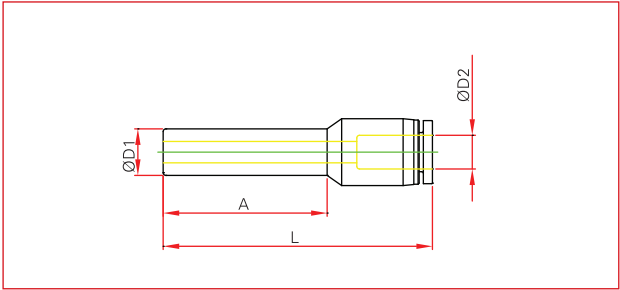


MODEL	ØD1	ØD2	L	A	Q'ty per bag	Q'ty per box
PGJ 06-04	6	4	38.5	22	10	100
PGJ 08-04	8	4	39	25	10	100
PGJ 08-06	8	6	42	25	10	100
PGJ 10-06	10	6	41	26.5	10	100
PGJ 10-08	10	8	45.5	26.5	10	100
PGJ 12-06	12	6	40	26.5	10	100
PGJ 12-08	12	8	43	26.5	10	50
PGJ 12-10	12	10	51	26.5	10	50

PKD male reducer
triple branch

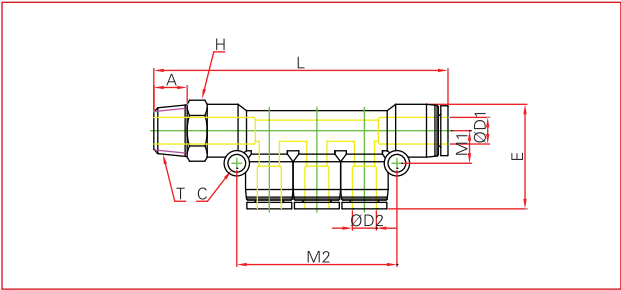

MODEL	ØD1	ØD2	L	E	M1	M2	C	A	H (Hex)	T	Q'ty per bag	Q'ty per box
PKD 04-01	4	4	68	27	9	41.5	3.2	8	10	PT 1/8	5	25
PKD 04-02	4	4	70.4	27	9	41.5	3.2	8	10	PT 1/4	5	25
PKD 0604-01	6	4	68	27	9	41.5	3.2	8	12	PT 1/8	5	25
PKD 0604-02	6	4	70.5	27	9	41.5	3.2	8	12	PT 1/4	5	25
PKD 0804-01	8	4	68.5	27	9	41.5	3.2	8	14	PT 1/8	5	25
PKD 0804-02	8	4	70.5	27	9	41.5	3.2	10	14	PT 1/4	5	25
PKD 06-01	6	6	68	27	9	41.5	3.2	8	12	PT 1/8	5	25
PKD 06-02	6	6	70.5	27	9	41.5	3.2	10	14	PT 1/4	5	25
PKD 0806-01	8	6	68	27	9	41.5	3.2	8	14	PT 1/8	5	25
PKD 0806-02	8	6	70.5	27	9	41.5	3.2	10	14	PT 1/4	5	25
PKD 08-02	8	8	88.5	33	12	47.8	4.2	10	14	PT 1/4	5	25
PKD 08-03	8	8	89.3	33	12	47.8	4.2	11	17	PT 3/8	5	25
PKD 1006-02	10	6	89.5	33	12	47.8	4.2	10	17	PT 1/4	5	20
PKD 1006-03	10	6	90.3	33	12	47.8	4.2	11	17	PT 3/8	5	20
PKD 1008-02	10	8	89.5	33	12	47.8	4.2	10	17	PT 1/4	5	15
PKD 1008-03	10	8	90.3	33	12	47.8	4.2	11	17	PT 3/8	5	15
PKD 10-02	10	10	98.7	37.5	12	56.5	4.5	10	17	PT 1/4	5	15
PKD 10-03	10	10	100	37.5	12	56.5	4.5	11	17	PT 3/8	5	15
PKD 10-04	10	10	103.5	37.5	12	56.5	4.5	14	21	PT 1/2	5	15
PKD 1208-03	12	8	100	37	15.5	59.5	4.5	11	19	PT 3/8	5	15
PKD 1208-04	12	8	103.5	37	15.5	59.5	4.5	14	21	PT 1/2	5	15
PKD 1210-03	12	10	100	38	15.5	59.5	4.5	11	19	PT 3/8	5	15
PKD 1210-04	12	10	103.5	38	15.5	59.5	4.5	14	21	PT 1/2	5	15
PKD 12-03	12	12	104.5	39.7	15.5	67.5	4.5	11	19	PT 3/8	5	15
PKD 12-04	12	12	107.5	39.7	15.5	67.5	4.5	14	21	PT 1/2	5	15

PUL union elbow

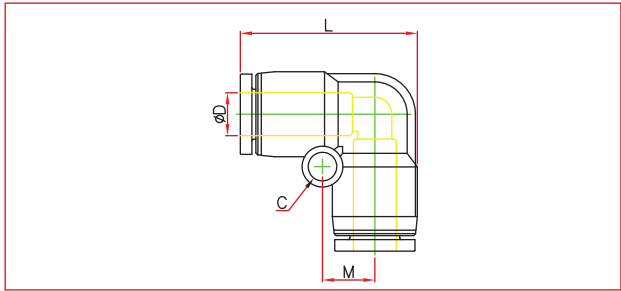


MODEL	ØD	L	M	C	Q'ty per bag	Q'ty per box
PUL 04	4	24	7	3.2	10	100
PUL 06	6	25	8	3.2	10	100
PUL 08	8	29	9	3.2	10	50
PUL 10	10	37	12	4.2	10	50
PUL 12	12	40	13.5	4.2	5	25
PUL 14	14	41.5	13.5	4.2	5	25
PUL 16	16	45.5	14	5.2	5	25

ONE-TOUCH FITTINGS


>METRIC SYSTEM

PA dual male banjo

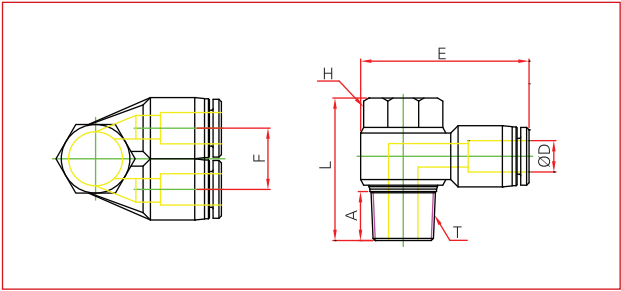

MODEL	ØD	T	E	L	F	A	H (Hex)	Q'ty per bag	Q'ty per box
PA 04-M5	4	M5*P0.8	27.3	17.5	11	3.5	8	10	100
PA 06-01	6	PT 1/8	31.2	23	13	7.5	12	10	50
PA 08-01	8	PT 1/8	33	22.7	14.4	7.5	12	10	50
PA 08-02	8	PT 1/4	37.2	26.2	14.4	9.5	14	5	25
PA 10-02	10	PT 1/4	40.3	26.2	18.4	9.5	14	5	25
PA 10-03	10	PT 3/8	44.2	32	18.4	10.5	19	5	25
PA 12-03	12	PT 3/8	45	32	21	10.5	19	5	20
PA 12-04	12	PT 1/2	50.8	39	21	14	24	5	20

PAF dual female banjo

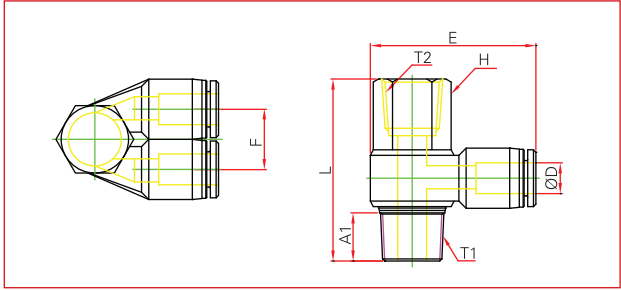


MODEL	ØD	T1 / T2	E	L	F	A1	H (Hex)	Q'ty per bag	Q'ty per box
PAF 04-M5	4	M5*P0.8	27.3	20	11	3.5	8	10	100
PAF 06-01	6	PT 1/8	31.2	28	13	7.5	14	10	50
PAF 08-01	8	PT 1/8	33	28	14.4	7.5	14	10	50
PAF 08-02	8	PT 1/4	37.2	33	14.4	9.5	17	5	25
PAF 10-02	10	PT 1/4	40.3	33	18.4	9.5	17	5	25
PAF 10-03	10	PT 3/8	44.2	38.9	18.4	10.5	21	5	20
PAF 12-03	12	PT 3/8	45	39.9	21	10.5	21	5	15
PAF 12-04	12	PT 1/2	50.8	46.6	21	14	24	5	10




FLEXIBLE REINFORCED PVC AIR TOOL HOSE ASSEMBLY

PKJ reducer triple
branch union

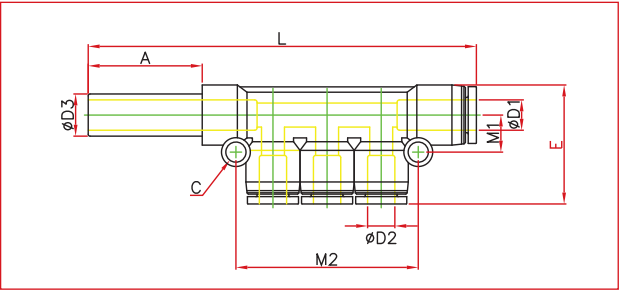

MODEL	ØD1	ØD2	ØD3	L	A	E	C	M1	M2	Q'ty per bag	Q'ty per box
PKJ 04	4	4	4	76	20.5	27	3.2	9	41.5	5	25
PKJ 0604	6	4	6	77.5	22	27	3.2	9	41.5	5	25
PKJ 06	6	6	6	77.5	22	27	3.2	9	41.5	5	25
PKJ 0804	8	4	8	80	24	27	3.2	9	41.5	5	25
PKJ 0806	8	6	8	80	24	27	3.2	9	41.5	5	25
PKJ 08	8	8	8	98.5	24	33	4.2	12	47.8	5	25
PKJ 1006	10	6	10	101	25.5	32.5	4.2	12	47.8	5	15
PKJ 1008	10	8	10	101	25.5	32.5	4.2	12	47.8	5	15
PKJ 10	10	10	10	110.5	25.5	37.5	4.5	12	56.5	5	15
PKJ 1208	12	8	12	113.5	27	37	4.5	15.5	59.5	3	12
PKJ 1210	12	10	12	113.5	27	38	4.5	15.5	59.5	3	12
PKJ 12	12	12	12	121	27	39.5	4.5	15.5	67.5	3	12

PYJ plug-in J

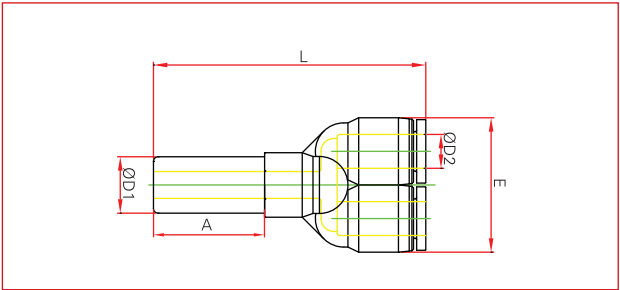


MODEL	ØD1	ØD2	L	A	E	Q'ty per bag	Q'ty per box
PYJ 04	4	4	52	20.5	22	10	50
PYJ 0604	6	4	54	22	22	10	50
PYJ 06	6	6	54.5	22	26	10	50
PYJ 0806	8	6	56.5	24	26	10	50
PYJ 08	8	8	59	24	29.5	10	50
PYJ 1008	10	8	64	25.5	29.5	5	25
PYJ 10	10	10	69.5	25.5	37	5	25
PYJ 1210	12	10	73.5	27	37	5	25
PYJ 12	12	12	74	27	42	5	20

ONE-TOUCH FITTINGS


> INCH SYSTEM

PC male straight

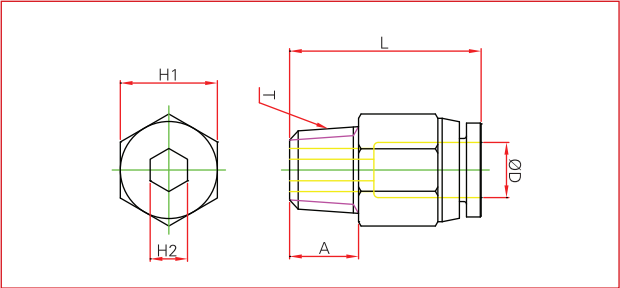


MODEL	ØD	T (Thread)	L	A	H1 (HEX)	H2 (HEX)	Q'ty per bag	Q'ty per box
PC 5/32-UNF	5/32	UNF 10/32	20.8	4	7/16	2	10	100
PC 5/32-N01	5/32	NPT 1/8	20	7.5	7/16	3	10	100
PC 5/32-N02	5/32	NPT 1/4	18.4	9.5	9/16	3	10	100
PC 5/32-N03	5/32	NPT 3/8	20	10.5	11/16	3	10	100
PC 3/16-UNF	3/16	UNF 10/32	19.5	4	7/16	2	10	100
PC 3/16-N01	3/16	NPT 1/8	20	7.5	7/16	3	10	100
PC 3/16-N02	3/16	NPT 1/4	18	9.5	9/16	3	10	100
PC 3/16-N03	3/16	NPT 3/8	19.5	10.5	11/16	3	10	100
PC 1/4-UNF	1/4	UNF 10/32	21	4	1/2	2	10	100
PC 1/4-N01	1/4	NPT 1/8	21	7.5	1/2	4	10	100
PC 1/4-N02	1/4	NPT 1/4	22.6	9.5	9/16	4	10	100
PC 1/4-N03	1/4	NPT 3/8	20.7	10.5	11/16	4	10	100
PC 1/4-N04	1/4	NPT 1/2	24.6	13.5	7/8	4	10	50
PC 5/16-N01	5/16	NPT 1/8	26	7.5	9/16	5	10	100
PC 5/16-N02	5/16	NPT 1/4	25	9.5	9/16	5	10	50
PC 5/16-N03	5/16	NPT 3/8	22	10.5	11/16	5	10	100
PC 5/16-N04	5/16	NPT 1/2	26.5	13.5	7/8	5	10	50
PC 3/8-N01	3/8	NPT 1/8	30.1	7.5	11/16	5	10	100
PC 3/8-N02	3/8	NPT 1/4	31	9.5	11/16	6	10	100
PC 3/8-N03	3/8	NPT 3/8	28.5	10.5	11/16	8	10	50
PC 3/8-N04	3/8	NPT 1/2	26.5	13.5	7/8	8	10	50
PC 1/2-N01	1/2	NPT 1/8	31.7	7.5	7/8	5	10	50
PC 1/2-N02	1/2	NPT 1/4	33	9.5	7/8	6	10	50
PC 1/2-N03	1/2	NPT 3/8	30.5	10.5	7/8	8	10	50
PC 1/2-N04	1/2	NPT 1/2	32	13.5	7/8	8	10	50

PUT union tee

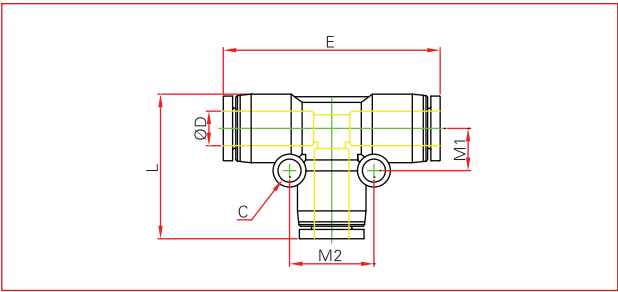


MODEL	ØD	E	L	M1	M2	C	Q'ty per bag	Q'ty per box
PUT 5/32	5/32	36.5	24	7	14	3.2	10	100
PUT 3/16	3/16	36.5	24	7	14	3.2	10	100
PUT 1/4	1/4	37.5	25.5	8	16	3.2	10	50
PUT 5/16	5/16	44.5	29.5	9	18	3.2	10	50
PUT 3/8	3/8	55	37	12	24	4.2	5	25
PUT 1/2	1/2	58	39	13.5	27	4.2	5	25

POC Round male straight

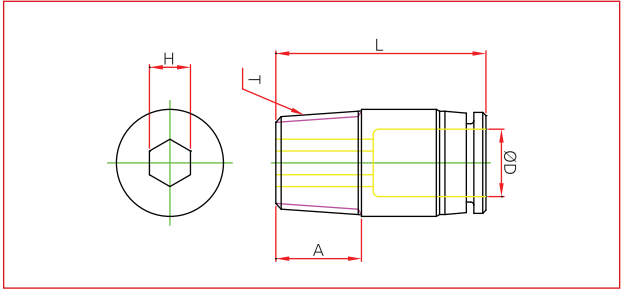

MODEL	ØD	T (Thread)	L	A	H (HEX)	Q'ty per bag	Q'ty per box
POC 5/32-UNF	5/32	UNF 10/32	20.2	4	2	10	100
POC 5/32-N01	5/32	NPT 1/8	20	7.5	3	10	100
POC 5/32-N02	5/32	NPT 1/4	19	9.5	3	10	100
POC 3/16-UNF	3/16	UNF 10/32	19.5	4	2	10	100
POC 3/16-N01	3/16	NPT 1/8	20	7.5	3	10	100
POC 3/16-N02	3/16	NPT 1/4	18	9.5	3	10	100
POC 1/4-UNF	1/4	UNF 10/32	20.5	4	2	10	100
POC 1/4-N01	1/4	NPT 1/8	21	7.5	4	10	100
POC 1/4-N02	1/4	NPT 1/4	22.4	9.5	4	10	100
POC 5/16-N01	5/16	NPT 1/8	26	7.5	5	10	100
POC 5/16-N02	5/16	NPT 1/4	25	9.5	5	10	100
POC 5/16-N03	5/16	NPT 3/8	22	10.5	5	10	100
POC 3/8-N01	3/8	NPT 1/8	29	7.5	5	10	100
POC 3/8-N02	3/8	NPT 1/4	31.3	9.5	6	10	100
POC 3/8-N03	3/8	NPT 3/8	28.5	10.5	8	10	50
POC 3/8-N04	3/8	NPT 1/2	26.5	13.5	8	10	50
POC 1/2-N02	1/2	NPT 1/4	33	9.5	6	10	50
POC 1/2-N03	1/2	NPT 3/8	30.1	10.5	8	10	50
POC 1/2-N04	1/2	NPT 1/2	32.5	13.5	8	10	50

PG reducer

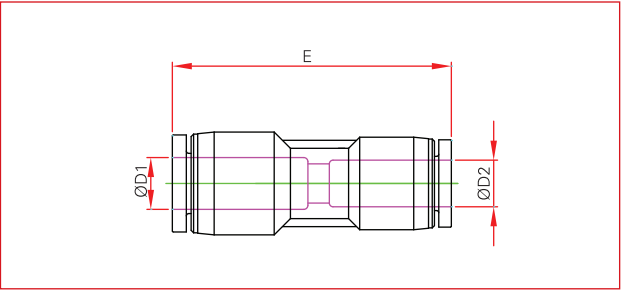


MODEL	ØD1	ØD2	E	Q'ty per bag	Q'ty per box
PG 3/16-5/32	3/16	5/32	33	10	100
PG 1/4-5/32	1/4	5/32	34	10	100
PG 1/4-3/16	1/4	3/16	34	10	100
PG 5/16-5/32	5/16	5/32	36	10	100
PG 5/16-1/4	5/16	1/4	36	10	100
PG 3/8-1/4	3/8	1/4	42.5	10	50
PG 3/8-5/16	3/8	5/16	42.5	10	50
PG 1/2-5/16	1/2	5/16	47.5	10	50
PG 1/2-3/8	1/2	3/8	47.5	10	50

ONE-TOUCH FITTINGS


> INCH SYSTEM

PL male elbow

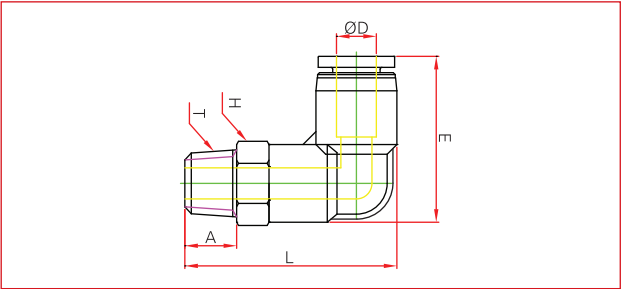


MODEL	ØD	T (Thread)	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PL 5/32-UNF	5/32	UNF 10/32	23	26.5	4	7/16	10	100
PL 5/32-N01	5/32	NPT 1/8	23	30.3	7.5	7/16	10	100
PL 5/32-N02	5/32	NPT 1/4	23	32.7	9.5	9/16	10	100
PL 3/16-UNF	3/16	UNF 10/32	23	26.5	4	7/16	10	100
PL 3/16-N01	3/16	NPT 1/8	23	30.3	7.5	7/16	10	100
PL 3/16-N02	3/16	NPT 1/4	23	32.7	9.5	9/16	10	100
PL 3/16-N03	3/16	NPT 3/8	23	34	10.5	11/16	10	100
PL 1/4-UNF	1/4	UNF 10/32	24.5	28.2	4	1/2	10	100
PL 1/4-N01	1/4	NPT 1/8	24.5	31.5	7.5	1/2	10	100
PL 1/4-N02	1/4	NPT 1/4	24.5	33.9	9.5	9/16	10	50
PL 1/4-N03	1/4	NPT 3/8	24.5	35.2	10.5	11/16	10	50
PL 5/16-N01	5/16	NPT 1/8	29.5	35	7.5	9/16	10	50
PL 5/16-N02	5/16	NPT 1/4	29.5	37	9.5	9/16	10	50
PL 5/16-N03	5/16	NPT 3/8	29.5	38.3	10.5	11/16	10	50
PL 5/16-N04	5/16	NPT 1/2	29.5	41.8	13.5	7/8	10	50
PL 3/8-N01	3/8	NPT 1/8	36	41.8	7.5	11/16	10	50
PL 3/8-N02	3/8	NPT 1/4	36	43.8	9.5	11/16	10	50
PL 3/8-N03	3/8	NPT 3/8	36	44.8	10.5	11/16	10	50
PL 3/8-N04	3/8	NPT 1/2	36	48.3	13.5	7/8	5	25
PL 1/2-N02	1/2	NPT 1/4	38.5	46.3	9.5	11/16	5	25
PL 1/2-N03	1/2	NPT 3/8	38.5	48.3	10.5	11/16	5	25
PL 1/2-N04	1/2	NPT 1/2	38.5	50.8	13.5	7/8	5	25

PGT reducer tee

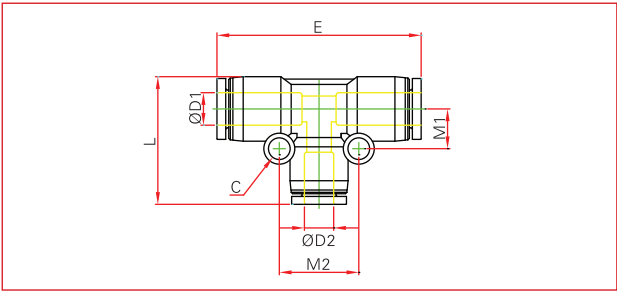



MODEL	ØD1	ØD2	L	E	C	M1	M2	Q'ty per bag	Q'ty per box
PGT 1/4-5/32	1/4	5/32	25.5	38	3.2	8	13.8	10	50
PGT 5/16-1/4	5/16	1/4	28	43.5	3.2	9	16.6	10	50
PGT 3/8-1/4	3/8	1/4	31.5	52	4.2	11	16.8	5	25
PGT 3/8-5/16	3/8	5/16	33	55	4.2	11	18.4	5	25
PGT 1/2-5/16	1/2	5/16	35	56	4.2	12.3	18.4	5	25
PGT 1/2-3/8	1/2	3/8	39	57.5	4.2	12.3	18.4	5	25

PT male branch tee

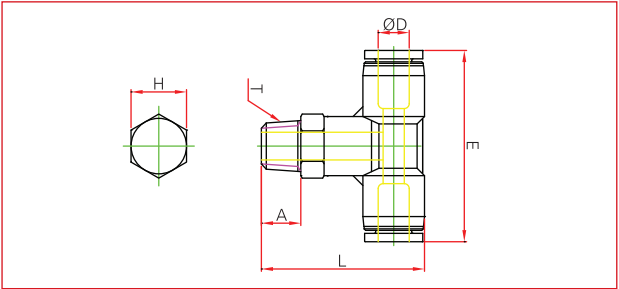

MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PT 5/32-UNF	5/32	UNF 10/32	26.3	37	4	7/16	10	100
PT 5/32-N01	5/32	NPT 1/8	29.5	37	7.5	7/16	10	50
PT 5/32-N02	5/32	NPT 1/4	32.5	37	9.5	9/16	10	50
PT 3/16-UNF	3/16	UNF 10/32	27	37	4	7/16	10	100
PT 3/16-N01	3/16	NPT 1/8	30	37	7.5	7/16	10	50
PT 3/16-N02	3/16	NPT 1/4	32.6	37	9.5	9/16	10	50
PT 3/16-N03	3/16	NPT 3/8	34	37	10.5	11/16	10	50
PT 1/4-UNF	1/4	UNF 10/32	28	38	4	1/2	10	50
PT 1/4-N01	1/4	NPT 1/8	31.5	38	7.5	1/2	10	50
PT 1/4-N02	1/4	NPT 1/4	34	38	9.5	9/16	10	50
PT 1/4-N03	1/4	NPT 3/8	35.5	38	10.5	11/16	10	50
PT 5/16-N01	5/16	NPT 1/8	35.5	44.5	7.5	9/16	10	50
PT 5/16-N02	5/16	NPT 1/4	37.5	44.5	9.5	9/16	10	50
PT 5/16-N03	5/16	NPT 3/8	38.5	44.5	10.5	11/16	10	50
PT 5/16-N04	5/16	NPT 1/2	42.1	44.5	13.5	7/8	5	25
PT 3/8-N01	3/8	NPT 1/8	43.2	55.5	7.5	11/16	5	25
PT 3/8-N02	3/8	NPT 1/4	44.3	55.5	9.5	11/16	5	25
PT 3/8-N03	3/8	NPT 3/8	45.8	55.5	10.5	11/16	5	25
PT 3/8-N04	3/8	NPT 1/2	48.9	55.5	13.5	7/8	5	20
PT 1/2-N02	1/2	NPT 1/4	46.2	58	9.5	3/4	5	25
PT 1/2-N03	1/2	NPT 3/8	47.5	58	10.5	3/4	5	25
PT 1/2-N04	1/2	NPT 1/2	50.4	58	13.5	7/8	5	20

PPF cap

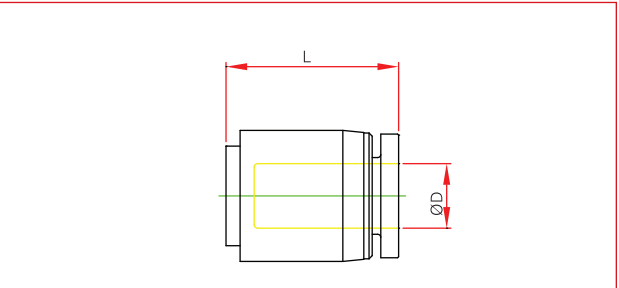


MODEL	ØD	L	Q'ty per bag	Q'ty per box
PPF 5/32	5/32	18	10	100
PPF 3/16	3/16	18	10	100
PPF 1/4	1/4	19	10	100
PPF 5/16	5/16	21	10	100
PPF 3/8	3/8	23	10	50
PPF 1/2	1/2	25	10	50

ONE-TOUCH FITTINGS


> INCH SYSTEM

PST male run tee

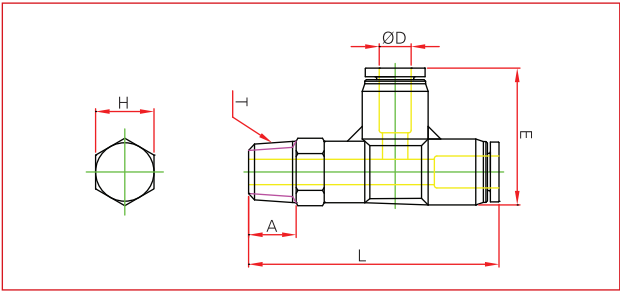


MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PST 5/32-UNF	5/32	UNF 10/32	39.5	24	4	7/16	10	100
PST 5/32-N01	5/32	NPT 1/8	43	24	7.5	7/16	10	50
PST 5/32-N02	5/32	NPT 1/4	45	24	9.5	9/16	10	50
PST 3/16-UNF	3/16	UNF 10/32	39.5	24	4	7/16	10	100
PST 3/16-N01	3/16	NPT 1/8	43	24	7.5	7/16	10	50
PST 3/16-N02	3/16	NPT 1/4	45	24	9.5	9/16	10	50
PST 3/16-N03	3/16	NPT 3/8	46.5	24	10.5	11/16	10	50
PST 1/4-UNF	1/4	UNF 10/32	40.5	25.5	4	1/2	10	100
PST 1/4-N01	1/4	NPT 1/8	44	25.5	7.5	1/2	10	50
PST 1/4-N02	1/4	NPT 1/4	46	25.5	9.5	9/16	10	50
PST 1/4-N03	1/4	NPT 3/8	47	25.5	10.5	11/16	10	50
PST 5/16-N01	5/16	NPT 1/8	50	29.5	7.5	9/16	10	50
PST 5/16-N02	5/16	NPT 1/4	52	29.5	9.5	9/16	10	50
PST 5/16-N03	5/16	NPT 3/8	53	29.5	10.5	11/16	10	50
PST 5/16-N04	5/16	NPT 1/2	56	29.5	13.5	7/8	5	25
PST 3/8-N01	3/8	NPT 1/8	61	36.5	7.5	11/16	5	25
PST 3/8-N02	3/8	NPT 1/4	63	36.5	9.5	11/16	5	25
PST 3/8-N03	3/8	NPT 3/8	64	36.5	10.5	11/16	5	25
PST 3/8-N04	3/8	NPT 1/2	67	36.5	13.5	7/8	5	20
PST 1/2-N02	1/2	NPT 1/4	66	40	9.5	3/4	5	25
PST 1/2-N03	1/2	NPT 3/8	67	40	10.5	3/4	5	25
PST 1/2-N04	1/2	NPT 1/2	69.5	40	13.5	7/8	5	20

PUL union elbow

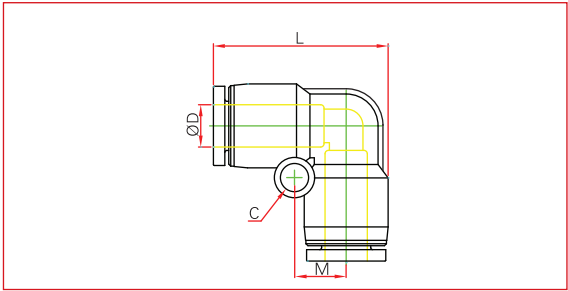


MODEL	ØD	M	L	C	Q'ty per bag	Q'ty per box
PUL 5/32	5/32	7	24	3.2	10	100
PUL 3/16	3/16	7	24	3.2	10	100
PUL 1/4	1/4	8	25	3.2	10	100
PUL 5/16	5/16	9	29	3.2	10	50
PUL 3/8	3/8	12	37	4.2	10	50
PUL 1/2	1/2	13.5	40	4.2	5	25

PWT male Y

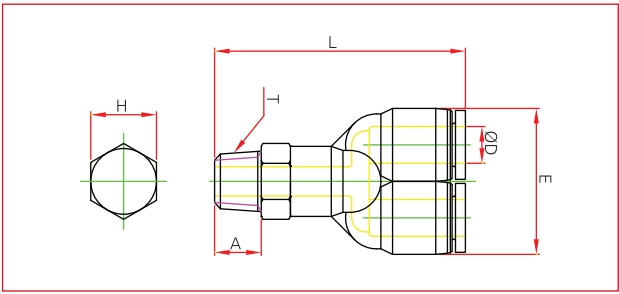

MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PWT 5/32-UNF	5/32	UNF 10/32	39	22	4	7/16	10	100
PWT 5/32-N01	5/32	NPT 1/8	42.5	22	7.5	7/16	10	50
PWT 5/32-N02	5/32	NPT 1/4	46	22	9.5	9/16	10	50
PWT 3/16-UNF	3/16	UNF 10/32	39	22	4	7/16	10	100
PWT 3/16-N01	3/16	NPT 1/8	42.5	22	7.5	7/16	10	50
PWT 3/16-N02	3/16	NPT 1/4	44.5	22	9.5	9/16	10	50
PWT 3/16-N03	3/16	NPT 3/8	46	22	10.5	11/16	10	50
PWT 1/4-UNF	1/4	UNF 10/32	40	26	4	1/2	10	50
PWT 1/4-N01	1/4	NPT 1/8	44.5	26	7.5	1/2	10	50
PWT 1/4-N02	1/4	NPT 1/4	46.5	26	9.5	9/16	10	50
PWT 1/4-N03	1/4	NPT 3/8	47.5	26	10.5	11/16	10	50
PWT 5/16-N01	5/16	NPT 1/8	47.5	30	7.5	9/16	10	50
PWT 5/16-N02	5/16	NPT 1/4	49.5	30	9.5	9/16	10	50
PWT 5/16-N03	5/16	NPT 3/8	50.5	30	10.5	11/16	10	50
PWT 5/16-N04	5/16	NPT 1/2	53.5	30	13.5	7/8	5	25
PWT 3/8-N01	3/8	NPT 1/8	57	37	7.5	11/16	5	25
PWT 3/8-N02	3/8	NPT 1/4	59	37	9.5	11/16	5	25
PWT 3/8-N03	3/8	NPT 3/8	60	37	10.5	11/16	5	25
PWT 3/8-N04	3/8	NPT 1/2	63	37	13.5	7/8	5	20
PWT 1/2-N02	1/2	NPT 1/4	62	42.5	9.5	7/8	5	20
PWT 1/2-N03	1/2	NPT 3/8	63	42.5	10.5	7/8	5	20
PWT 1/2-N04	1/2	NPT 1/2	66	42.5	13.5	7/8	5	20

PY union Y

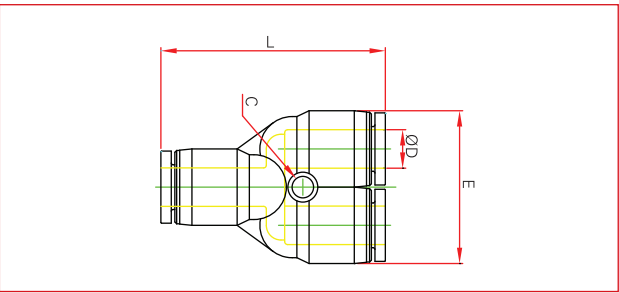


MODEL	ØD	L	E	C	Q'ty per bag	Q'ty per box
PY 5/32	5/32	35.5	22	3.2	10	100
PY 3/16	3/16	35.5	22	3.2	10	100
PY 1/4	1/4	37	26	3.2	10	50
PY 5/16	5/16	39.5	30	3.2	10	50
PY 3/8	3/8	50.5	37	4.2	5	25
PY 1/2	1/2	52.5	42	4.2	5	25

ONE-TOUCH FITTINGS


> INCH SYSTEM

PLL extended male elbow

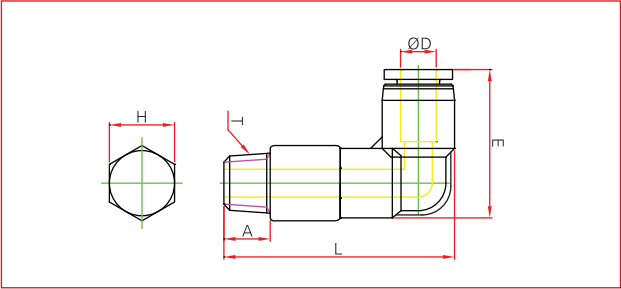


MODEL	ØD	T (Thread)	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PLL 5/32-UNF	5/32	UNF 10/32	23.5	37	4	7/16	10	50
PLL 5/32-N01	5/32	NPT 1/8	23.5	40.3	7.5	7/16	10	50
PLL 5/32-N02	5/32	NPT 1/4	23.5	42.7	9.5	9/16	10	50
PLL 3/16-UNF	3/16	UNF 10/32	23.5	37	4	7/16	10	100
PLL 3/16-N01	3/16	NPT 1/8	23.5	40.3	7.5	7/16	10	50
PLL 3/16-N02	3/16	NPT 1/4	23.5	42.7	9.5	9/16	10	50
PLL 3/16-N03	3/16	NPT 3/8	23.5	44	10.5	11/16	10	50
PLL 1/4-UNF	1/4	UNF 10/32	25	47	4	1/2	10	100
PLL 1/4-N01	1/4	NPT 1/8	25	43.5	7.5	1/2	10	50
PLL 1/4-N02	1/4	NPT 1/4	25	44.5	9.5	9/16	10	50
PLL 1/4-N03	1/4	NPT 3/8	25	47.2	10.5	11/16	10	50
PLL 5/16-N01	5/16	NPT 1/8	30	49	7.5	9/16	10	50
PLL 5/16-N02	5/16	NPT 1/4	30	51	9.5	9/16	10	50
PLL 5/16-N03	5/16	NPT 3/8	30	52.3	10.5	11/16	10	50
PLL 5/16-N04	5/16	NPT 1/2	30	56.5	13.5	7/8	5	25
PLL 3/8-N01	3/8	NPT 1/8	36	58.5	7.5	11/16	5	25
PLL 3/8-N02	3/8	NPT 1/4	36	60.8	9.5	11/16	5	25
PLL 3/8-N03	3/8	NPT 3/8	36	61.8	10.5	11/16	5	25
PLL 3/8-N04	3/8	NPT 1/2	36	65.3	13.5	7/8	5	25
PLL 1/2-N02	1/2	NPT 1/4	38.5	70	9.5	3/4	5	25
PLL 1/2-N03	1/2	NPT 3/8	38.5	68.3	10.5	3/4	5	25
PLL 1/2-N04	1/2	NPT 1/2	38.5	67.5	13.5	7/8	5	25

PW reducer Y

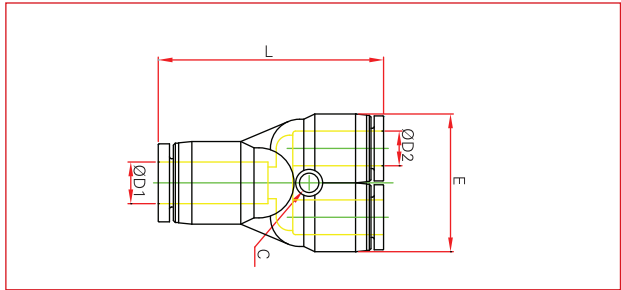


MODEL	ØD1	ØD2	L	E	C	Q'ty per bag	Q'ty per box
PW 3/16-5/32	3/16	5/32	36.5	22	3.2	10	100
PW 1/4-5/32	1/4	5/32	36	22	3.2	10	100
PW 1/4-3/16	1/4	3/16	36	22	3.2	10	100
PW 5/16-5/32	5/16	5/32	37	26	3.2	10	50
PW 5/16-1/4	5/16	1/4	37	26	3.3	10	50
PW 3/8-1/4	3/8	1/4	43.5	29	3.2	10	50
PW 3/8-5/16	3/8	5/16	44	29	3.2	10	50
PW 1/2-5/16	1/2	5/16	51	36.5	4.2	5	25
PW 1/2-3/8	1/2	3/8	51	36.5	4.2	5	25

PLF extended female elbow

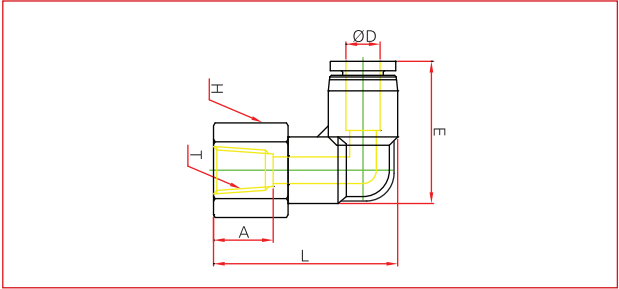


MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PLF 5/32-UNF	5/32	UNF 10/32	24.5	23.5	7	10	10	100
PLF 5/32-N01	5/32	NPT 1/8	28.5	23.5	8.5	14	10	50
PLF 5/32-N02	5/32	NPT 1/4	31	23.5	10.5	17	10	50
PLF 3/16-UNF	3/16	UNF 10/32	24.5	23.5	7	10	10	100
PLF 3/16-N01	3/16	NPT 1/8	28.5	23.5	8.5	14	10	50
PLF 3/16-N02	3/16	NPT 1/4	31	23.5	10.5	17	10	50
PLF 1/4-UNF	1/4	UNF 10/32	25.5	24	7	12	10	100
PLF 1/4-N01	1/4	NPT 1/8	29.5	24	8.5	14	10	50
PLF 1/4-N02	1/4	NPT 1/4	32	24	10	17	10	50
PLF 1/4-N03	1/4	NPT 3/8	33.5	25	11.5	21	10	50
PLF 5/16-N01	5/16	NPT 1/8	33	29.5	8.5	14	10	50
PLF 5/16-N02	5/16	NPT 1/4	35.5	29.5	10.5	17	10	50
PLF 5/16-N03	5/16	NPT 3/8	37	29.5	11.5	20	10	50
PLF 3/8-N01	3/8	NPT 1/8	34.5	36	8.5	17	5	25
PLF 3/8-N02	3/8	NPT 1/4	41	36	10.5	17	5	25
PLF 3/8-N03	3/8	NPT 3/8	43	36	11.5	21	5	25
PLF 3/8-N04	3/8	NPT 1/2	46	36	14.5	24	5	25
PLF 1/2-N02	1/2	NPT 1/4	44.5	38.5	10.5	19	5	25
PLF 1/2-N03	1/2	NPT 3/8	46	38.5	11.5	21	5	25
PLF 1/2-N04	1/2	NPT 1/2	49	38.5	14.5	24	5	25

PUC union straight

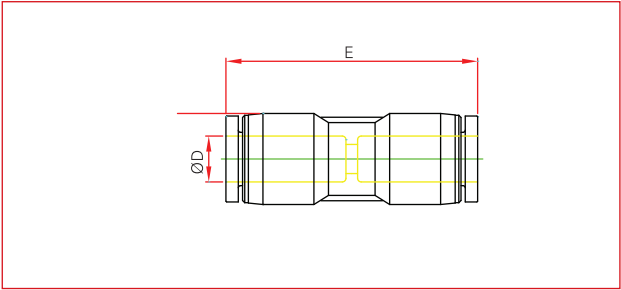


MODEL	ØD	E	Q'ty per bag	Q'ty per box
PUC 5/32	5/32	32	10	100
PUC 3/16	3/16	33	10	100
PUC 1/4	1/4	34.5	10	100
PUC 5/16	5/16	38.5	10	50
PUC 3/8	3/8	47.5	10	50
PUC 1/2	1/2	49	5	25

PCF female straight

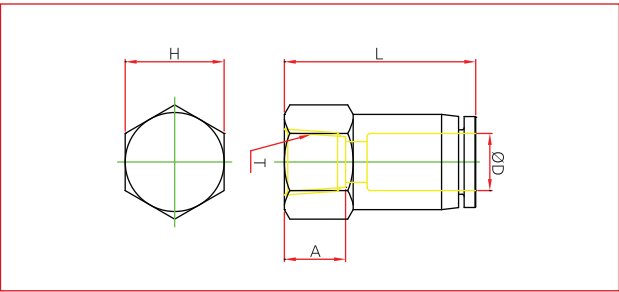


MODEL	ØD	T	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PCF 5/32-N01	5/32	NPT 1/8	24	8.5	14	10	100
PCF 5/32-N02	5/32	NPT 1/4	26.5	11	17	10	100
PCF 3/16-N01	3/16	NPT 1/8	23.5	8.5	14	10	100
PCF 3/16-N02	3/16	NPT 1/4	26.5	11	17	10	100
PCF 1/4-N01	1/4	NPT 1/8	25	8.5	14	10	100
PCF 1/4-N02	1/4	NPT 1/4	27	11	17	10	100
PCF 1/4-N03	1/4	NPT 3/8	28	12	20	10	50
PCF 5/16-N01	5/16	NPT 1/8	26	8.5	14	10	100
PCF 5/16-N02	5/16	NPT 1/4	28.5	11	17	10	100
PCF 5/16-N03	5/16	NPT 3/8	30	12	20	10	50
PCF 5/16-N04	5/16	NPT 1/2	32	13	24	10	50
PCF 3/8-N01	3/8	NPT 1/8	29	8.5	17	10	50
PCF 3/8-N02	3/8	NPT 1/4	32	11	17	10	50
PCF 3/8-N03	3/8	NPT 3/8	33	12	20	10	50
PCF 3/8-N04	3/8	NPT 1/2	35	14	24	10	50
PCF 1/2-N02	1/2	NPT 1/4	33.5	11	21	10	50
PCF 1/2-N03	1/2	NPT 3/8	34.5	12	21	10	50
PCF 1/2-N04	1/2	NPT 1/2	36.5	14	24	5	25

PP plug

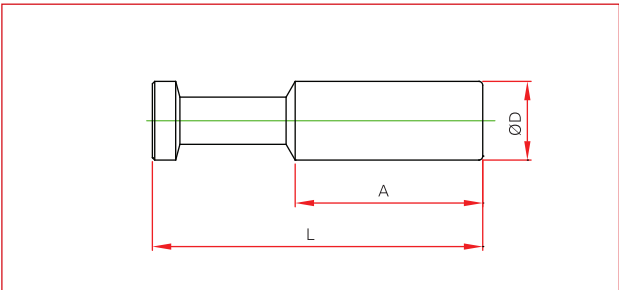


MODEL	ØD	L	A	Q'ty per bag	Q'ty per box
PP 5/32	5/32	28	15	10	100
PP 3/16	3/16	28	15	10	100
PP 1/4	1/4	33	17	10	100
PP 5/16	5/16	36	18	10	100
PP 3/8	3/8	42.5	22	10	100
PP 1/2	1/2	43	22	10	100

PMF bulkhead
female straight

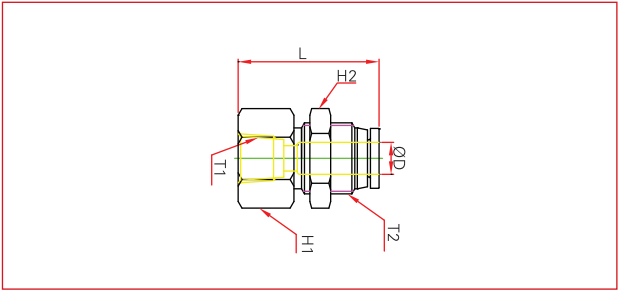

MODEL	ØD	T1	T2	L	H1 (HEX)	H2 (HEX)	Q'ty per bag	Q'ty per box
PMF 5/32-N01	5/32	NPT 1/8	M12xP1.0	24	14	14	10	100
PMF 5/32-N02	5/32	NPT 1/4	M12xP1.0	26.5	17	14	10	100
PMF 3/16-N01	3/16	NPT 1/8	M12xP1.0	24	14	14	10	100
PMF 3/16-N02	3/16	NPT 1/4	M12xP1.0	24	17	14	10	100
PMF 1/4-N01	1/4	NPT 1/8	M14xP1.0	25	17	17	10	100
PMF 1/4-N02	1/4	NPT 1/4	M14xP1.0	27	17	17	10	100
PMF 1/4-N03	1/4	NPT 3/8	M14xP1.0	28	20	17	10	50
PMF 5/16-N01	5/16	NPT 1/8	M16xP1.0	27	19	19	10	50
PMF 5/16-N02	5/16	NPT 1/4	M16xP1.0	29	19	19	10	50
PMF 5/16-N03	5/16	NPT 3/8	M16xP1.0	29.5	20	19	10	50
PMF 5/16-N04	5/16	NPT 1/2	M16xP1.0	31.5	24	19	5	25
PMF 3/8-N01	3/8	NPT 1/8	M20xP1.0	30.5	24	24	10	50
PMF 3/8-N02	3/8	NPT 1/4	M20xP1.0	33	24	24	10	50
PMF 3/8-N03	3/8	NPT 3/8	M20xP1.0	34	24	24	10	50
PMF 3/8-N04	3/8	NPT 1/2	M20xP1.0	35	24	24	5	25
PMF 1/2-N02	1/2	NPT 1/4	M22xP1.0	34	27	27	5	25
PMF 1/2-N03	1/2	NPT 3/8	M22xP1.0	34	27	27	5	25
PMF 1/2-N04	1/2	NPT 1/2	M22xP1.0	36	27	27	5	25

PMM bulkhead
union

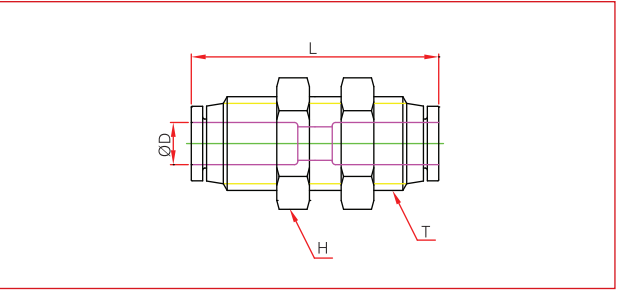


MODEL	ØD	T	L	H (HEX)	Q'ty per bag	Q'ty per box
PMM 5/32	5/32	M12xP1.0	30.5	14	10	100
PMM 3/16	3/16	M12xP1.0	30.5	14	10	100
PMM 1/4	1/4	M14xP1.0	31	17	10	100
PMM 5/16	5/16	M16xP1.0	35	19	10	50
PMM 3/8	3/8	M20xP1.0	41	24	5	25
PMM 1/2	1/2	M22xP1.0	44	27	5	25

ONE-TOUCH FITTINGS


> INCH SYSTEM

PLJ plug-in elbow

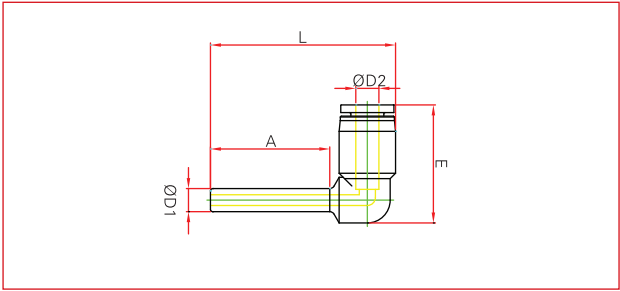

MODEL	ØD1	ØD2	L	E	A	Q'ty per bag	Q'ty per box
PLJ 5/32	5/32	5/32	38	23.5	20.5	10	100
PLJ 1/4	1/4	1/4	41	24	22	10	100
PLJ 5/16	5/16	5/16	46.5	29.5	24	10	50
PLJ 3/8	3/8	3/8	55	36	25.5	10	50
PLJ 1/2	1/2	1/2	59	37	27	5	25
PLJ 1/4-5/32	1/4	5/32	39.5	23.5	22	10	100
PLJ 5/16-1/4	5/16	1/4	43.5	24	24	10	100
PLJ 3/8-5/16	3/8	5/16	49	29.5	25.5	10	50
PLJ 1/2-3/8	1/2	3/8	59.5	36	27	5	25

PLM bulkhead union elbow

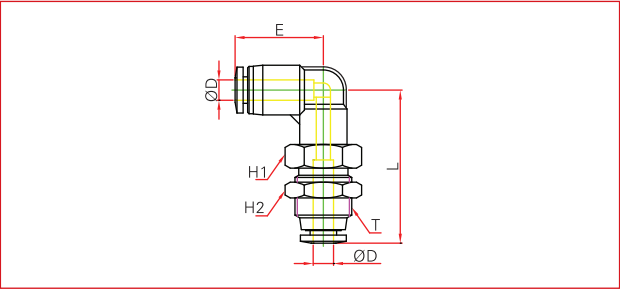


MODEL	ØD	T	L	E	H1 (HEX)	H2 (HEX)	Q'ty per bag	Q'ty per box
PLM 5/32	5/32	M12xP1.0	33.5	23	14	14	10	50
PLM 3/16	3/16	M12xP1.0	33.5	23	14	14	10	50
PLM 1/4	1/4	M14xP1.0	38	24	17	17	10	50
PLM 5/16	5/16	M16xP1.0	43	29	19	19	10	50
PLM 3/8	3/8	M20xP1.0	50	36	24	24	5	25
PLM 1/2	1/2	M22xP1.0	57	38	27	27	5	25




Coiled Heavy Duty Polyurethane Air Hose Assembly

PH male banjo

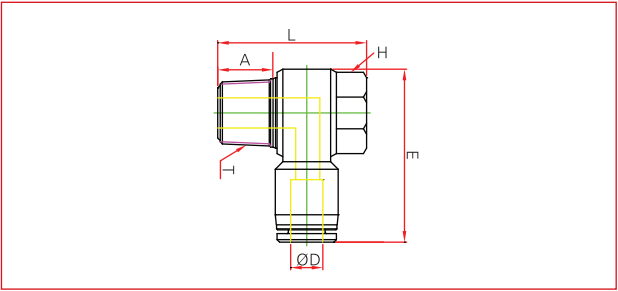

MODEL	ØD	T	E	L	A	H (HEX)	Q'ty per bag	Q'ty per box
PH 5/32-UNF	5/32	UNF 10/32	25	17.5	4	8	10	100
PH 5/32-N01	5/32	NPT 1/8	29	23.6	7	12	10	50
PH 5/32-N02	5/32	NPT 1/4	33	26.5	9.5	14	10	50
PH 3/16-UNF	3/16	UNF 10/32	25	17.5	4	8	10	100
PH 3/16-N01	3/16	NPT 1/8	29	23.6	7	12	10	50
PH 3/16-N02	3/16	NPT 1/4	33	26.5	9.5	14	10	50
PH 1/4-UNF	1/4	UNF 10/32	26.5	17.5	4	8	10	100
PH 1/4-N01	1/4	NPT 1/8	30	23	7	12	10	50
PH 1/4-N02	1/4	NPT 1/4	34	26.5	9.5	14	10	50
PH 1/4-N03	1/4	NPT 3/8	38	33	10.5	19	5	25
PH 1/4-N04	1/4	NPT 1/2	46	39.1	14	24	5	25
PH 5/16-N01	5/16	NPT 1/8	32	23	7	12	10	50
PH 5/16-N02	5/16	NPT 1/4	37	26.5	9.5	14	10	50
PH 5/16-N03	5/16	NPT 3/8	40	33	10.5	19	5	25
PH 5/16-N04	5/16	NPT 1/2	46	39.1	14	24	5	25
PH 3/8-N01	3/8	NPT 1/8	37.5	24	7	12	10	50
PH 3/8-N02	3/8	NPT 1/4	41	26.5	9.5	14	10	50
PH 3/8-N03	3/8	NPT 3/8	44	32	10.5	17.5	5	25
PH 3/8-N04	3/8	NPT 1/2	50	39.1	14	24	5	20
PH 1/2-N02	1/2	NPT 1/4	42.5	26.5	9.5	14	5	25
PH 1/2-N03	1/2	NPT 3/8	46	33	10.5	19	5	25
PH 1/2-N04	1/2	NPT 1/2	50	39.1	14	24	5	20

PZA union cross


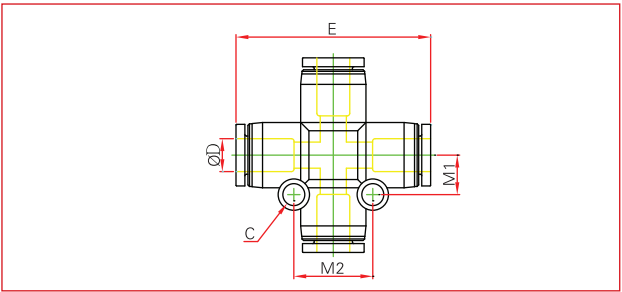


MODEL	ØD	M1	M2	E	C	Q'ty per bag	Q'ty per box
PZA 5/32	5/32	7.4	14.8	36.5	3.2	10	50
PZA 3/16	3/16	7.4	14.8	36.5	3.2	10	50
PZA 1/4	1/4	7.9	15.8	38	3.2	10	50
PZA 5/16	5/16	9	18	44.8	3.2	5	25
PZA 3/8	3/8	11.8	23	56.8	4.2	5	20
PZA 1/2	1/2	13.3	26.6	58.6	4.2	5	15

ONE-TOUCH FITTINGS


> INCH SYSTEM

PHF female banjo

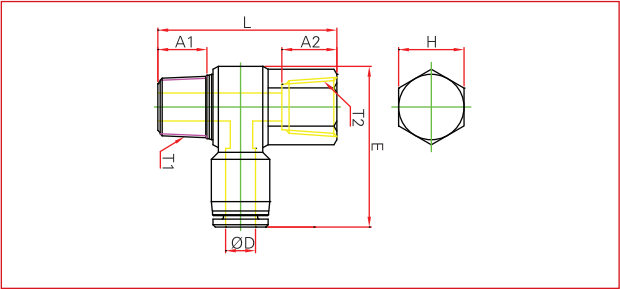


MODEL	ØD	T1	T2	L	E	A1	A2	H (HEX)	Q'ty per bag	Q'ty per box
PHF 5/32-UNF	5/32	UNF 10/32	UNF 10/32	20	25	4	5	8	10	100
PHF 5/32-N01	5/32	NPT 1/8	NPT 1/8	29	29.5	7.5	6.5	14	10	50
PHF 5/32-N02	5/32	NPT 1/4	NPT 1/4	33	33	9.5	8.5	17	10	50
PHF 3/16-UNF	3/16	UNF 10/32	UNF 10/32	20	25	4	5	8	10	100
PHF 3/16-N01	3/16	NPT 1/8	NPT 1/8	28	29.5	7.5	6.5	14	10	50
PHF 3/16-N02	3/16	NPT 1/4	NPT 1/4	33	33	9.5	8.5	17	10	50
PHF 1/4-UNF	1/4	UNF 10/32	UNF 10/32	20	26.5	4	5	8	10	100
PHF 1/4-N01	1/4	NPT 1/8	NPT 1/8	28	30	7.5	6.5	14	10	50
PHF 1/4-N02	1/4	NPT 1/4	NPT 1/4	33	34	9.5	8.5	17	10	50
PHF 1/4-N03	1/4	NPT 3/8	NPT 3/8	38.9	38	10.5	9.5	21	5	25
PHF 1/4-N04	1/4	NPT 1/2	NPT 1/2	46.6	46	14	11.5	24	5	25
PHF 5/16-N01	5/16	NPT 1/8	NPT 1/8	28	32.5	7.5	6.5	14	10	50
PHF 5/16-N02	5/16	NPT 1/4	NPT 1/4	33	37.5	9.5	8.5	17	10	50
PHF 5/16-N03	5/16	NPT 3/8	NPT 3/8	38.9	40	10.5	9.5	21	5	25
PHF 5/16-N04	5/16	NPT 1/2	NPT 1/2	46.6	46	14	11.5	24	5	25
PHF 3/8-N01	3/8	NPT 1/8	NPT 1/8	28	37	7.5	6.5	14	5	25
PHF 3/8-N02	3/8	NPT 1/4	NPT 1/4	33	41	9.5	8.5	17	5	25
PHF 3/8-N03	3/8	NPT 3/8	NPT 3/8	38.9	42	10.5	9.5	21	5	25
PHF 3/8-N04	3/8	NPT 1/2	NPT 1/2	46.6	49.5	14	11.5	24	5	15
PHF 1/2-N02	1/2	NPT 1/4	NPT 1/4	35	42.5	9.5	8.5	17	5	25
PHF 1/2-N03	1/2	NPT 3/8	NPT 3/8	38.9	46	10.5	9.5	21	5	20
PHF 1/2-N04	1/2	NPT 1/2	NPT 1/2	46.6	50	14	11.5	24	5	15

PWJ plug-in Y

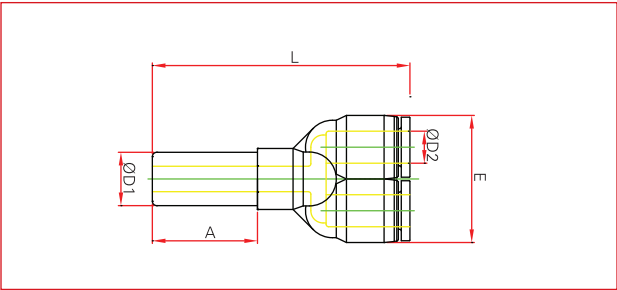


MODEL	ØD1	ØD2	L	A	E	Q'ty per bag	Q'ty per box
PWJ 1/4-5/32	1/4	5/32	52.5	21	22	10	50
PWJ 5/16-1/4	5/16	1/4	56	23.5	26	10	50
PWJ 3/8-5/16	3/8	5/16	63.5	25	29.5	5	25
PWJ 1/2-3/8	1/2	3/8	72	28	37	5	25

PGJ plug-in reducer

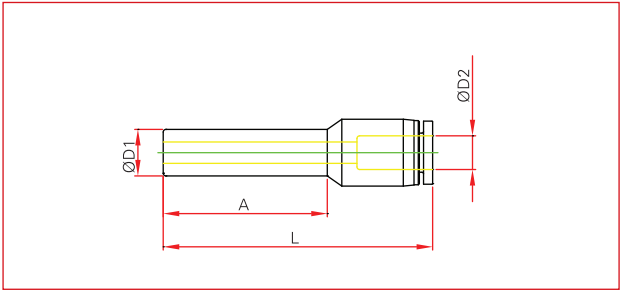

MODEL	ØD1	ØD2	L	A	Q'ty per bag	Q'ty per box
PGJ 1/4-5/32	1/4	5/32	38.5	22	10	100
PGJ 5/16-5/32	5/16	5/32	39	25	10	100
PGJ 5/16-1/4	5/16	1/4	42	25	10	100
PGJ 3/8-1/4	3/8	1/4	41	26.5	10	100
PGJ 3/8-5/16	3/8	5/16	45.5	26.5	10	100
PGJ 1/2-1/4	1/2	1/4	41	26.5	10	100
PGJ 1/2-5/16	1/2	5/16	43	26.5	10	50
PGJ 1/2-3/8	1/2	3/8	51	26.5	10	50

PKD male reducer triple branch

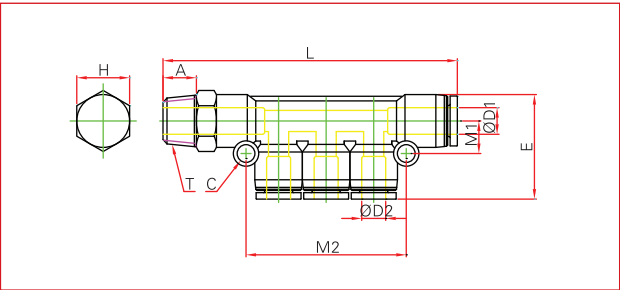


MODEL	ØD1	ØD2	L	E	M1	M2	C	A	H (HEX)	T	Q'ty per bag	Q'ty per box
PKD 5/32-N01	5/32	5/32	68	27	9	41.5	3.2	8	10	NPT 1/8	5	25
PKD 5/32-N02	5/32	5/32	70.2	27	9	41.5	3.2	8	10	NPT 1/4	5	25
PKD 1/4-5/32-N01	1/4	5/32	68	27	9	41.5	3.2	8	12	NPT 1/8	5	25
PKD 1/4-5/32-N02	1/4	5/32	70.5	27	9	41.5	3.2	8	12	NPT 1/4	5	25
PKD 5/16-5/32-N01	5/16	5/32	68.5	27	9	41.5	3.2	8	14	NPT 1/8	5	25
PKD 5/16-5/32-N02	5/16	5/32	70.5	27	9	41.5	3.2	10	14	NPT 1/4	5	25
PKD 1/4-N01	1/4	1/4	68	27	9	41.5	3.2	8	12	NPT 1/8	5	25
PKD 1/4-N02	1/4	1/4	70.5	27	9	41.5	3.2	10	14	NPT 1/4	5	25
PKD 5/16-1/4-N01	5/16	1/4	68	27	9	41.5	3.2	8	14	NPT 1/8	5	25
PKD 5/16-1/4-N02	5/16	1/4	70.5	27	9	41.5	3.2	10	14	NPT 1/4	5	25
PKD 5/16-N02	5/16	5/16	88.5	33	12	47.8	4.2	10	14	NPT 1/4	5	25
PKD 5/16-N03	5/16	5/16	89.3	33	12	47.8	4.2	11	17	NPT 3/8	5	25
PKD 3/8-1/4-N02	3/8	1/4	89.5	33	12	47.8	4.2	10	17	NPT 1/4	5	20
PKD 3/8-1/4-N03	3/8	1/4	90.3	33	12	47.8	4.2	11	17	NPT 3/8	5	20
PKD 3/8-5/16-N02	3/8	5/16	89.5	33	12	47.8	4.2	10	17	NPT 1/4	5	15
PKD 3/8-5/16-N03	3/8	5/16	90.3	33	12	47.8	4.2	11	17	NPT 3/8	5	15
PKD 3/8-N02	3/8	3/8	98.7	37.5	12	56.5	3.5	10	17	NPT 1/4	5	15
PKD 3/8-N03	3/8	3/8	100	37.5	12	56.5	3.5	11	17	NPT 3/8	5	15
PKD 3/8-N04	3/8	3/8	103.5	37.5	12	56.5	3.5	14	21	NPT 1/2	5	15
PKD 1/2-5/16-N03	1/2	5/16	100	37	15.5	59.5	4.5	11	19	NPT 3/8	5	15
PKD 1/2-5/16-N04	1/2	5/16	103.5	37	15.5	59.5	4.5	14	21	NPT 1/2	5	15
PKD 1/2-3/8-N03	1/2	3/8	100	38	15.5	59.5	4.5	11	19	NPT 3/8	5	15
PKD 1/2-3/8-N04	1/2	3/8	103.5	38	15.5	59.5	4.5	14	21	NPT 1/2	5	15
PKD 1/2-N03	1/2	1/2	104.5	39.7	15.5	67.5	4.5	11	19	NPT 3/8	5	15
PKD 1/2-N04	1/2	1/2	107.5	39.7	15.5	67.5	4.5	14	21	NPT 1/2	5	15

ONE-TOUCH FITTINGS


> INCH SYSTEM

PKG reducer triple branch union

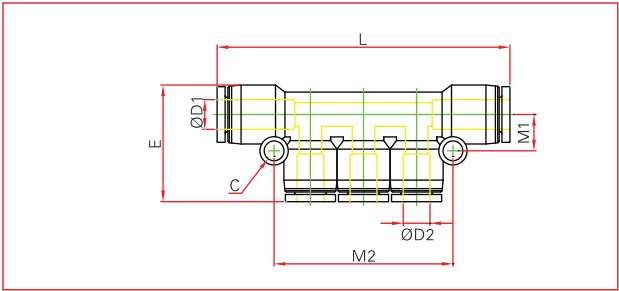


MODEL	ØD1	ØD2	M1	M2	L	E	C	Q'ty per bag	Q'ty per box
PKG 5/32	5/32	5/32	9	41.5	59	27	3.2	5	25
PKG 1/4	1/4	1/4	9	41.5	59.5	27	3.2	5	25
PKG 5/16	5/16	5/16	12	47.8	79.5	33	4.2	5	25
PKG 3/8	3/8	3/8	12	56.5	90.9	37.5	3.5	5	25
PKG 1/2	1/2	1/2	15.5	67.5	99.4	39.5	4.5	5	20
PKG 1/4-5/32	1/4	5/32	9	41.5	59.5	27	3.2	5	25
PKG 5/16-5/32	5/16	5/32	9	41.5	80	27	3.2	5	25
PKG 5/16- 1/4	5/16	1/4	9	41.5	80	27	3.2	5	25
PKG 3/8- 1/4	3/8	1/4	12	47.8	82.5	32.5	4.2	5	25
PKG 3/8-5/16	3/8	5/16	12	47.8	82.5	32.5	4.2	5	20
PKG 1/2-5/16	1/2	5/16	15.5	59.5	91.8	37	4.5	5	20
PKG 1/2-3/8	1/2	3/8	15.5	59.5	91.8	38	4.5	5	20

PKJ reducer triple branch union

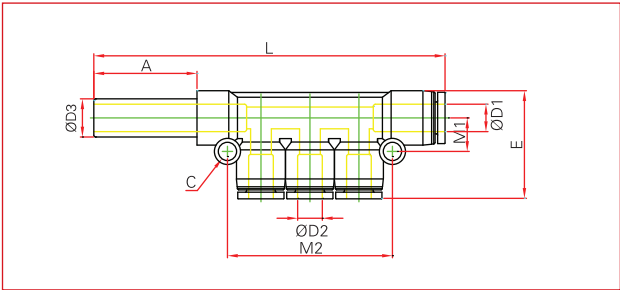


MODEL	ØD1	ØD2	ØD3	L	A	E	C	M1	M2	Q'ty per bag	Q'ty per box
PKJ 5/32	5/32	5/32	5/32	76	20.5	27	3.2	9	41.5	5	25
PKJ 1/4-5/32	1/4	5/32	1/4	77.5	22	27	3.2	9	41.5	5	25
PKJ 1/4	1/4	1/4	1/4	77.5	22	27	3.2	9	41.5	5	25
PKJ 5/16-5/32	5/16	5/32	5/16	80	24	27	3.2	9	41.5	5	25
PKJ 5/16-1/4	5/16	1/4	5/16	80	24	27	3.2	9	41.5	5	25
PKJ 5/16	5/16	5/16	5/16	98.5	24	33	4.2	12	47.8	5	25
PKJ 3/8-1/4	3/8	1/4	3/8	101	25.5	32.5	4.2	12	47.8	5	15
PKJ 3/8-5/16	3/8	5/16	3/8	101	25.5	32.5	4.2	12	47.8	5	15
PKJ 3/8	3/8	3/8	3/8	110.5	25.5	37.5	4.5	12	56.5	5	15
PKJ 1/2-5/16	1/2	5/16	1/2	113.5	27	37	4.5	15.5	59.5	3	12
PKJ 1/2-3/8	1/2	3/8	1/2	113.5	27	38	4.5	15.5	59.5	3	12
PKJ 1/2	1/2	1/2	1/2	121	27	39.5	4.5	15.5	67.5	3	12

PYJ plug-in J

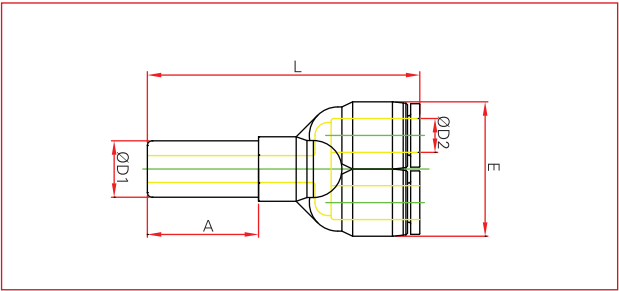

MODEL	ØD1	ØD2	L	A	E	Q'ty per bag	Q'ty per box
PYJ 5/32	5/32	5/32	52	20.5	22	10	50
PYJ 1/4-5/32	1/4	5/32	54	22	22	10	50
PYJ 1/4	1/4	1/4	54.5	22	26	10	50
PYJ 5/16-1/4	5/16	1/4	56.5	24	26	10	50
PYJ 5/16	5/16	5/16	59	24	29.5	10	50
PYJ 3/8-5/16	3/8	5/16	64	25.5	29.5	5	25
PYJ 3/8	3/8	3/8	69.5	25.5	37	5	25
PYJ 1/2-3/8	1/2	3/8	73.5	27	37	5	25
PYJ 1/2	1/2	1/2	74	27	42	5	20

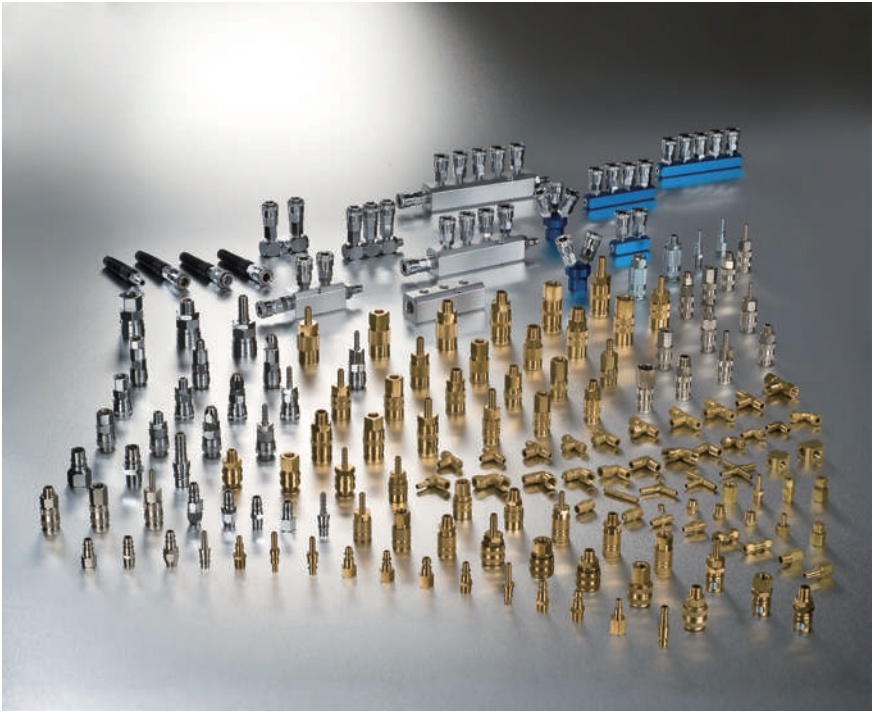


QUICK COUPLER & PLUG SERIES

ONE-TOUCH FITTINGS / G TYPE

> METRIC SYSTEM, BSPP, WITH INTEGRAL O-RING SEAL

PC male straight

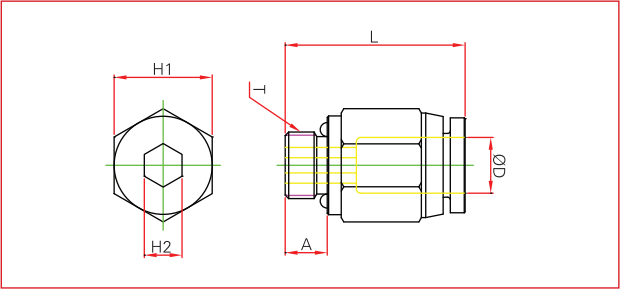


MODEL	ØD	T	L	A	H1 (HEX)	H2 (HEX)	Q'ty per bag	Q'ty per box
PC 04-G01	4	G 1/8	20.5	5.5	12	3	10	100
PC 04-G02	4	G 1/4	20	6.5	12	3	10	100
PC 06-G01	6	G 1/8	22	5.5	13	4	10	100
PC 06-G02	6	G 1/4	22	6.5	14	4	10	100
PC 06-G03	6	G 3/8	19.5	6.5	14	4	10	100
PC 06-G04	6	G 1/2	23.5	10	17	4	10	100
PC 08-G01	8	G 1/8	25	5.5	14	5	10	100
PC 08-G02	8	G 1/4	25	6.5	14	6	10	100
PC 08-G03	8	G 3/8	23	6.5	17	6	10	100
PC 08-G04	8	G 1/2	25	10	17	6	10	50
PC 10-G01	10	G 1/8	28.5	5.5	17	5	10	100
PC 10-G02	10	G 1/4	29	6.5	17	6	10	100
PC 10-G03	10	G 3/8	25.5	6.5	20	8	10	50
PC 10-G04	10	G 1/2	29.5	10	20	8	10	50
PC 12-G01	12	G 1/8	30.1	5.5	21	5	10	50
PC 12-G02	12	G 1/4	32	6.5	21	6	10	50
PC 12-G03	12	G 3/8	28	6.5	21	8	10	50
PC 12-G04	12	G 1/2	31	10	21	8	10	50
PC 14-G02	14	G 1/4	31.5	6.5	22	6	10	50
PC 14-G03	14	G 3/8	31.6	6.5	22	8	10	50
PC 14-G04	14	G 1/2	30.6	10	24	10	10	50
PC 16-G03	16	G 3/8	34.5	7.5	24	8	5	25
PC 16-G04	16	G 1/2	37	10	24	10	5	25



ANTI-SPARK DUAL LAYER TUBING

PL male elbow

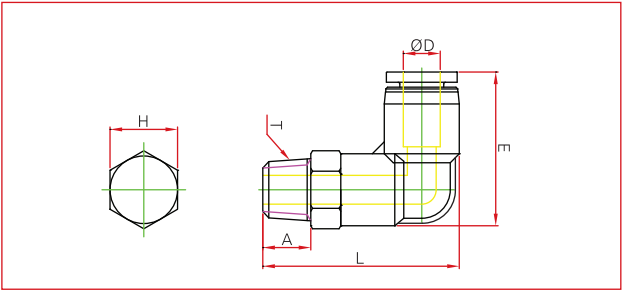

MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PL 04-G01	4	G 1/8	29.5	23	5.5	14	10	100
PL 04-G02	4	G 1/4	30.5	23	6.5	17	10	100
PL 04-G03	4	G 3/8	31	23	6.5	20	10	100
PL 06-G01	6	G 1/8	30.5	24.5	5.5	14	10	100
PL 06-G02	6	G 1/4	32.5	24.5	6.5	17	10	50
PL 06-G03	6	G 3/8	32.5	24.5	6.5	20	10	50
PL 06-G04	6	G 1/2	36.5	24.5	10	24	10	50
PL 08-G01	8	G 1/8	34.5	29.5	5.5	14	10	50
PL 08-G02	8	G 1/4	35.5	29.5	6.5	17	10	50
PL 08-G03	8	G 3/8	35.5	29.5	6.5	20	10	50
PL 08-G04	8	G 1/2	39.5	29.5	10	24	10	50
PL 10-G01	10	G 1/8	41.5	37	5.5	17	10	50
PL 10-G02	10	G 1/4	42.5	37	6.5	17	10	50
PL 10-G03	10	G 3/8	42.5	37	6.5	20	10	50
PL 10-G04	10	G 1/2	46	37	10	24	5	25
PL 12-G01	12	G 1/8	44	39	5.5	19	5	25
PL 12-G02	12	G 1/4	45	39	6.5	19	5	25
PL 12-G03	12	G 3/8	45	39	6.5	20	5	25
PL 12-G04	12	G 1/2	48.5	39	10	24	5	25
PL 14-G02	14	G 1/4	45.5	39.5	6.5	19	5	25
PL 14-G03	14	G 3/8	45.5	39.5	6.5	20	5	25
PL 14-G04	14	G 1/2	49	39.5	10	24	5	25
PL 16-G03	16	G 3/8	48.5	41	6.5	20	5	25
PL 16-G04	16	G 1/2	53	41	10	24	5	25




POLYURETHANE TWIN TUBING


ONE-TOUCH FITTINGS / G TYPE

> METRIC SYSTEM, BSPP, WITH INTEGRAL O-RING SEAL

POC

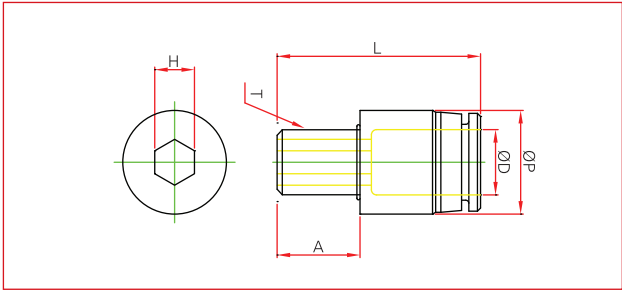


MODEL	ØD	T	L	A	H (HEX)	ØP	Q'ty per bag	Q'ty per box
POC 04-G01	4	G 1/8	20.5	5.5	3	10.5	10	100
POC 04-G02	4	G 1/4	20	6.5	3	10.5	10	100
POC 06-G01	6	G 1/8	22	5.5	4	12.5	10	100
POC 06-G02	6	G 1/4	22	6.5	4	12.5	10	100
POC 06-G03	6	G 3/8	19.5	6.5	4	12.5	10	100
POC 06-G04	6	G 1/2	23.5	10	4	12.5	10	50
POC 08-G01	8	G 1/8	25	5.5	5	14	10	100
POC 08-G02	8	G 1/4	25	6.5	6	14.5	10	100
POC 08-G03	8	G 3/8	23	6.5	6	14.5	10	100
POC 08-G04	8	G 1/2	25	10	6	14.5	10	50
POC 10-G01	10	G 1/8	29	5.5	5	17	10	100
POC 10-G02	10	G 1/4	29	6.5	6	17	10	100
POC 10-G03	10	G 3/8	26.5	6.5	8	17.5	10	50
POC 10-G04	10	G 1/2	29.5	10	8	17.5	10	50
POC 12-G02	12	G 1/4	32	6.5	6	20.5	10	50
POC 12-G03	12	G 3/8	28	6.5	8	20.5	10	50
POC 12-G04	12	G 1/2	31	10	8	20.5	10	50
POC 16-G03	16	G 3/8	34.5	6.5	8	24	5	25
POC 16-G04	16	G 1/2	34.5	10	10	24	5	25

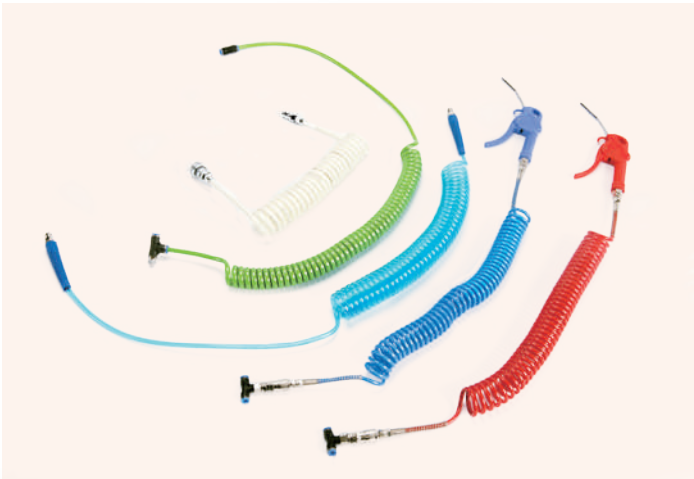


Coiled Polyurethane Tubing With Accessory

PT male branch tee

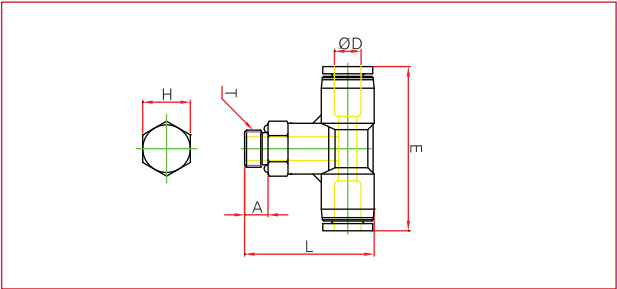

MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PT 04-G01	4	G 1/8	30	36	5.5	14	10	50
PT 04-G02	4	G 1/4	31	36	6.5	17	10	50
PT 04-G03	4	G 3/8	31	38	6.5	20	10	50
PT 06-G01	6	G 1/8	31.5	38.5	5.5	14	10	50
PT 06-G02	6	G 1/4	32.5	38.5	6.5	17	10	50
PT 06-G03	6	G 3/8	32.5	37.5	6.5	20	10	50
PT 08-G01	8	G 1/8	34	44.5	5.5	14	10	50
PT 08-G02	8	G 1/4	35	44.5	6.5	17	10	50
PT 08-G03	8	G 3/8	36	44.5	6.5	20	10	50
PT 08-G04	8	G 1/2	39.5	44.5	10	24	5	25
PT 10-G01	10	G 1/8	42	56	5.5	17	5	25
PT 10-G02	10	G 1/4	43	56	6.5	17	5	25
PT 10-G03	10	G 3/8	43	56	6.5	20	5	25
PT 10-G04	10	G 1/2	46.5	56	10	24	5	20
PT 12-G02	12	G 1/4	45	58.5	6.5	17	5	25
PT 12-G03	12	G 3/8	45	58.5	6.5	20	5	25
PT 12-G04	12	G 1/2	48.5	58.5	10	24	5	20
PT 14-G03	14	G 3/8	46	60.5	6.5	20	5	20
PT 14-G04	14	G 1/2	49.5	60.5	10	24	5	20
PT 16-G03	16	G 3/8	52.5	61.5	6.5	20	3	12
PT 16-G04	16	G 1/2	56.5	61.5	10	24	3	12

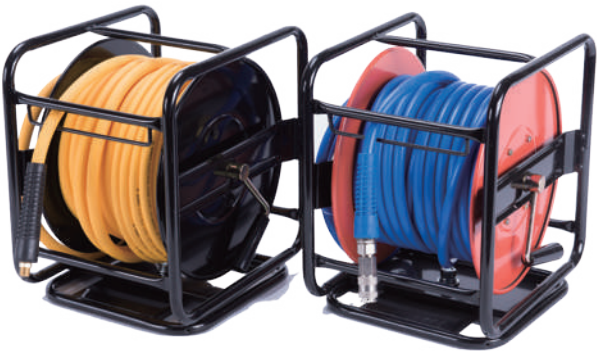


AIR HOSE REEL WITH YELLOW FLEXIBLE PVC HOSE
&
AIR HOSE REEL WITH BLUE PU BRAID HOSE

ONE-TOUCH FITTINGS / G TYPE


> METRIC SYSTEM, BSPP, WITH INTEGRAL O-RING SEAL

PST male run tee

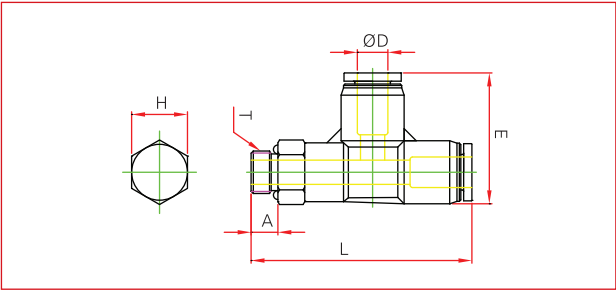


MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PST 04-G01	4	G 1/8	42	23.5	5.5	14	10	50
PST 04-G02	4	G 1/4	43	23.5	6.5	17	10	50
PST 04-G03	4	G 3/8	43	23.5	6.5	20	10	50
PST 06-G01	6	G 1/8	43	25	5.5	14	10	50
PST 06-G02	6	G 1/4	45	25	6.5	17	10	50
PST 06-G03	6	G 3/8	45	25.5	6.5	20	10	50
PST 08-G01	8	G 1/8	49.5	29	5.5	14	10	50
PST 08-G02	8	G 1/4	50.5	29	6.5	17	10	50
PST 08-G03	8	G 3/8	50.5	29	6.5	20	10	50
PST 08-G04	8	G 1/2	54	30	10	24	5	25
PST 10-G01	10	G 1/8	60.5	37	5.5	17	5	25
PST 10-G02	10	G 1/4	61.5	37	6.5	19	5	25
PST 10-G03	10	G 3/8	61.5	37	6.5	20	5	25
PST 10-G04	10	G 1/2	65	37	10	24	5	20
PST 12-G02	12	G 1/4	63	39.5	6.5	19	5	25
PST 12-G03	12	G 3/8	63	39.5	6.5	20	5	25
PST 12-G04	12	G 1/2	66.5	39.5	10	24	5	20
PST 14-G02	14	G 1/4	65.3	42	6.5	19	5	20
PST 14-G03	14	G 3/8	65.3	42	6.5	20	5	20
PST 14-G04	14	G 1/2	68.8	42	10	24	5	15

PA dual male banjo

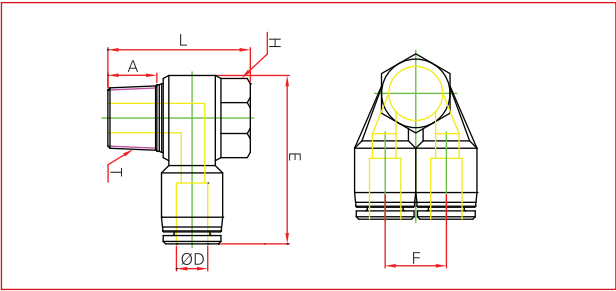


MODEL	ØD	T (Thread)	E	L	A	F	H (Hex)	Q'ty per bag	Q'ty per box
PA06-G01	6	G 1/8	31.2	23.6	5	13	12	10	50
PA08-G01	8	G 1/8	33	23.6	5	14.4	12	10	50
PA08-G02	8	G 1/4	37.2	26.8	7.3	14.4	14	5	25
PA10-G02	10	G 1/4	40.3	26.8	7.3	18.4	14	5	25
PA10-G03	10	G 3/8	44.2	32	7.5	18.4	19	5	25
PA12-G03	12	G 3/8	45	32	7.5	21	19	5	20
PA12-G04	12	G 1/2	50.8	39	10	21	24	5	20

PWT male Y

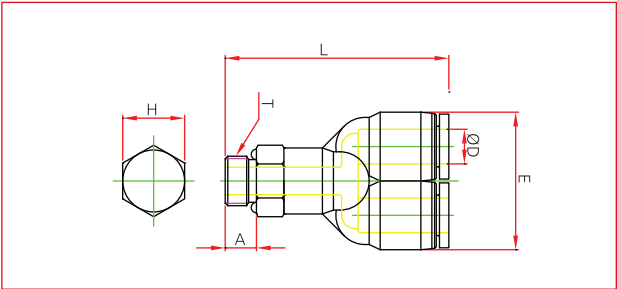

MODEL	ØD	T (Thread)	L	E	A	H (HEX)	Q'ty per bag	Q'ty per box
PWT 04-G01	4	G 1/8	42.5	22	5.5	14	10	50
PWT 04-G02	4	G 1/4	43.5	22	6.5	17	10	50
PWT 04-G03	4	G 3/8	43.5	23	6.5	20	10	50
PWT 06-G01	6	G 1/8	44	26	5.5	14	10	50
PWT 06-G02	6	G 1/4	45	26	6.5	17	10	50
PWT 06-G03	6	G 3/8	46	26	6.5	20	10	50
PWT 06-G04	6	G 1/2	49.5	26	10	24	10	50
PWT 08-G01	8	G 1/8	46	29.5	5.5	14	10	50
PWT 08-G02	8	G 1/4	48	29.5	6.5	17	10	50
PWT 08-G03	8	G 3/8	48	29.5	6.5	20	10	50
PWT 08-G04	8	G 1/2	51.5	29.5	10	24	5	25
PWT 10-G01	10	G 1/8	55	37	5.5	17	5	25
PWT 10-G02	10	G 1/4	57	37	6.5	17	5	25
PWT 10-G03	10	G 3/8	57	37	6.5	20	5	25
PWT 10-G04	10	G 1/2	60.5	37	10	24	5	20
PWT 12-G02	12	G 1/4	59.5	42.5	7.5	19	5	20
PWT 12-G03	12	G 3/8	59.5	42.5	6.5	20	5	20
PWT 12-G04	12	G 1/2	63	42.5	10	24	5	20
PWT 16-G03	16	G 3/8	63	51.5	6.5	20	3	15
PWT 16-G04	16	G 1/2	66.5	51.5	10	24	3	15

PAF dual female banjo

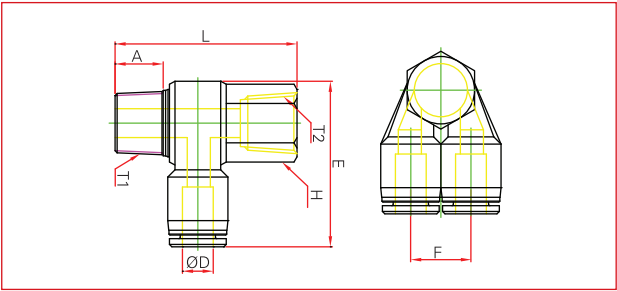


MODEL	ØD	T1/T2 (Thread)	E	L	A	F	H (Hex)	Q'ty per bag	Q'ty per box
PAF06-G01	6	G 1/8	31.2	27.1	5	13	14	10	50
PAF08-G01	8	G 1/8	33	27.1	5	14.4	14	10	50
PAF08-G02	8	G 1/4	37.2	33.3	7.3	14.4	17	5	25
PAF10-G02	10	G 1/4	40.3	33.3	7.3	18.4	17	5	25
PAF10-G03	10	G 3/8	44.2	40	8.5	18.4	21	5	20
PAF12-G03	12	G 3/8	45	40	8.5	21	21	5	15
PAF12-G04	12	G 1/2	50.8	46.3	9.8	21	24	5	10

ONE-TOUCH FITTINGS / G TYPE


> METRIC SYSTEM, BSPP, WITH INTEGRAL O-RING SEAL

PLL extended male elbow

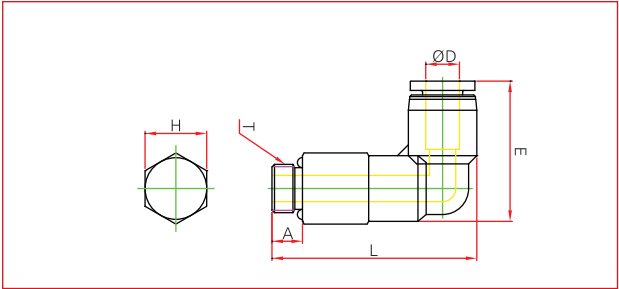


MODEL	ØD	T (Thread)	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
PLL 04-G01	4	G 1/8	38.5	23.5	5.5	14	10	50
PLL 04-G02	4	G 1/4	40.5	23.5	6.5	17	10	50
PLL 04-G03	4	G 3/8	40.2	23.5	6.5	20	10	50
PLL 06-G01	6	G 1/8	42	25	5.5	14	10	50
PLL 06-G02	6	G 1/4	43	25	6.5	17	10	50
PLL 06-G03	6	G 3/8	43	25	6.5	20	10	50
PLL 08-G01	8	G 1/8	48	30	5.5	14	10	50
PLL 08-G02	8	G 1/4	49	30	6.5	17	10	50
PLL 08-G03	8	G 3/8	49	30	6.5	20	10	50
PLL 08-G04	8	G 1/2	52.5	30	10	24	5	25
PLL 10-G01	10	G 1/8	58	36	5.5	17	5	25
PLL 10-G02	10	G 1/4	59	36	6.5	17	5	25
PLL 10-G03	10	G 3/8	59	36	6.5	20	5	25
PLL 10-G04	10	G 1/2	62.5	36	10	24	5	25
PLL 12-G02	12	G 1/4	65	38.5	6.5	19	5	25
PLL 12-G03	12	G 3/8	65	38.5	6.5	20	5	25
PLL 12-G04	12	G 1/2	68.5	38.5	10	24	5	25

PHF

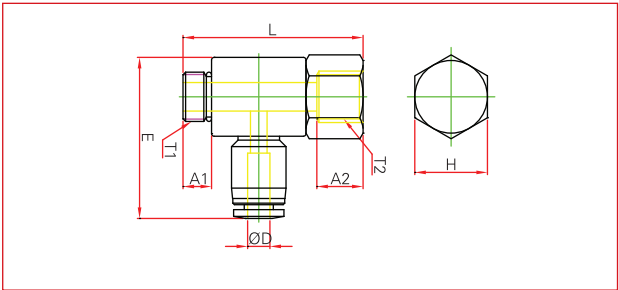


MODEL	ØD	T1	T2	L	E	A1	A2	H (Hex)	Q'ty per bag	Q'ty per box
PHF 04-G01	4	G 1/8	G 1/8	28	29.5	5.5	7.5	14	10	50
PHF 04-G02	4	G 1/4	G 1/4	33.3	33	6.5	8.5	17	10	50
PHF 06-G01	6	G 1/8	G 1/8	27.1	30	5.5	7.5	14	10	50
PHF 06-G02	6	G 1/4	G 1/4	33.3	34	7.5	8.5	17	10	50
PHF 06-G03	6	G 3/8	G 3/8	40	39.5	8.5	9.5	21	5	25
PHF 08-G01	8	G 1/8	G 1/8	28	32.5	5.5	7.5	14	10	50
PHF 08-G02	8	G 1/4	G 1/4	33.3	37.5	8	8.5	17	10	50
PHF 08-G03	8	G 3/8	G 3/8	40	40	8.5	9.5	21	5	25
PHF 08-G04	8	G 1/2	G 1/2	46.3	46	10	11.5	24	5	25
PHF 10-G01	10	G 1/8	G 1/8	27.1	37	5.5	7.5	14	5	25
PHF 10-G02	10	G 1/4	G 1/4	33.3	41	8	8.5	17	5	25
PHF 10-G03	10	G 3/8	G 3/8	40	44	8.5	9.5	21	5	25
PHF 10-G04	10	G 1/2	G 1/2	46.3	49.5	10	11.5	24	5	15
PHF 12-G02	12	G 1/4	G 1/4	33.3	42.5	7.5	8.5	17	5	25
PHF 12-G03	12	G 3/8	G 3/8	40	46	8.5	9.5	21	5	20
PHF 12-G04	12	G 1/2	G 1/2	46.3	50	10	11.5	24	5	15

PLF

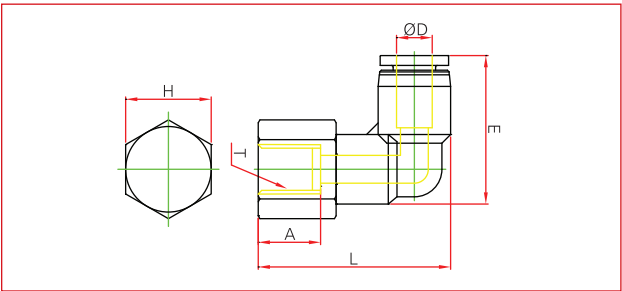

MODEL	ØD	T	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
PLF 04-G01	4	G 1/8	28.5	23.5	8	14	10	50
PLF 04-G02	4	G 1/4	31	23.5	11	17	10	50
PLF 04-G03	4	G 3/8	32.5	23.5	11	20	10	50
PLF 06-G01	6	G 1/8	29.5	24	9	14	10	50
PLF 06-G02	6	G 1/4	32	24	10	17	10	50
PLF 06-G03	6	G 3/8	33.5	25	11	20	10	50
PLF 06-G04	6	G 1/2	36.5	25	14	24	10	50
PLF 08-G01	8	G 1/8	33	29.5	8	14	10	50
PLF 08-G02	8	G 1/4	35.5	29.5	11	17	10	50
PLF 08-G03	8	G 3/8	37	29.5	11	20	10	50
PLF 08-G04	8	G 1/2	40	29.5	14	24	5	25
PLF 10-G01	10	G 1/8	36	36	8	17	10	50
PLF 10-G02	10	G 1/4	41	36	11	17	10	50
PLF 10-G03	10	G 3/8	43	36	12	20	5	25
PLF 10-G04	10	G 1/2	46	36	14	24	5	20
PLF 12-G01	12	G 1/8	39	38.5	8	19	5	20
PLF 12-G02	12	G 1/4	44.5	38.5	10	19	5	20
PLF 12-G03	12	G 3/8	46	38.5	11	21	5	20
PLF 12-G04	12	G 1/2	49	38.5	14	24	5	20

PMF

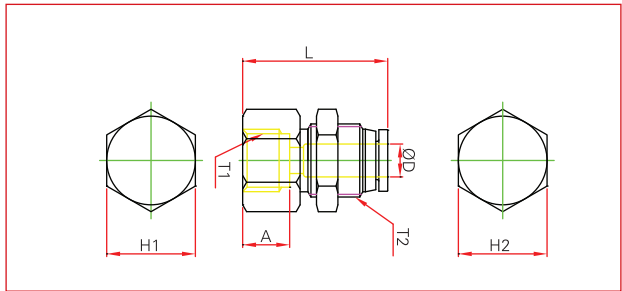


MODEL	ØD	T1	T2	L	H1 (Hex)	H2 (Hex)	A	Q'ty per bag	Q'ty per box
PMF 04-G01	4	G 1/8	M12xP1.0	24	14	14	8.5	10	100
PMF 04-G02	4	G 1/4	M12xP1.0	26.5	17	14	11	10	100
PMF 06-G01	6	G 1/8	M14xP1.0	25	17	17	8.5	10	100
PMF 06-G02	6	G 1/4	M14xP1.0	27	17	17	11	10	100
PMF 06-G03	6	G 3/8	M14xP1.0	28	20	17	11	10	50
PMF 08-G01	8	G 1/8	M16xP1.0	27	19	19	8.5	10	50
PMF 08-G02	8	G 1/4	M16xP1.0	29	19	19	11	10	50
PMF 08-G03	8	G 3/8	M16xP1.0	29.5	20	19	11	10	50
PMF 08-G04	8	G 1/2	M16xP1.0	31.5	24	19	13	5	25
PMF 10-G01	10	G 1/8	M20xP1.0	30.5	24	24	8.5	10	50
PMF 10-G02	10	G 1/4	M20xP1.0	33	24	24	11	10	50
PMF 10-G03	10	G 3/8	M20xP1.0	34	24	24	12	10	50
PMF 10-G04	10	G 1/2	M20xP1.0	37	24	24	13	5	25
PMF 12-G02	12	G 1/4	M22xP1.0	34	27	27	11	5	25
PMF 12-G03	12	G 3/8	M22xP1.0	35	27	27	12	5	25
PMF 12-G04	12	G 1/2	M22xP1.0	37	27	27	14	5	25

ONE-TOUCH FITTINGS / G TYPE


> METRIC SYSTEM, BSPP, WITH INTEGRAL O-RING SEAL

PCF

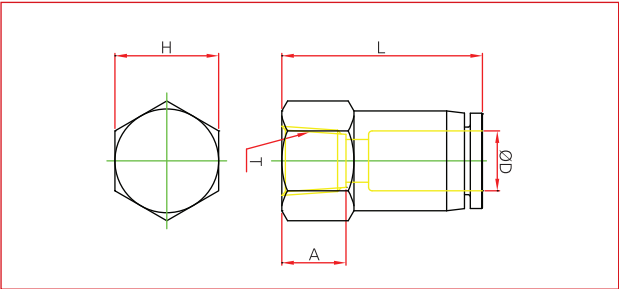


MODEL	ØD	T	L	A	H (Hex)	Q'ty per bag	Q'ty per box
PCF 04-G01	4	G 1/8	23.5	8.5	14	10	100
PCF 04-G02	4	G 1/4	26.5	11	17	10	100
PCF 06-G01	6	G 1/8	24	8.5	14	10	100
PCF 06-G02	6	G 1/4	27	11	17	10	100
PCF 06-G03	6	G 3/8	28	11	21	10	50
PCF 06-G04	6	G 1/2	30	13	24	10	50
PCF 08-G01	8	G 1/8	26	8.5	14	10	100
PCF 08-G02	8	G 1/4	28.5	11	17	10	100
PCF 08-G03	8	G 3/8	30	11	20	10	50
PCF 08-G04	8	G 1/2	32	14	24	10	50
PCF 10-G01	10	G 1/8	30	8.5	17	10	50
PCF 10-G02	10	G 1/4	32	11	17	10	50
PCF 10-G03	10	G 3/8	33	11	20	10	50
PCF 10-G04	10	G 1/2	35	14	24	10	50
PCF 12-G02	12	G 1/4	35	10	21	10	50
PCF 12-G03	12	G 3/8	36	12.5	21	10	50
PCF 12-G04	12	G 1/2	37.5	14	24	5	25
PCF 16-G03	16	G 3/8	36.5	11	24	5	25
PCF 16-G04	16	G 1/2	38 5	13	24	5	25

PH

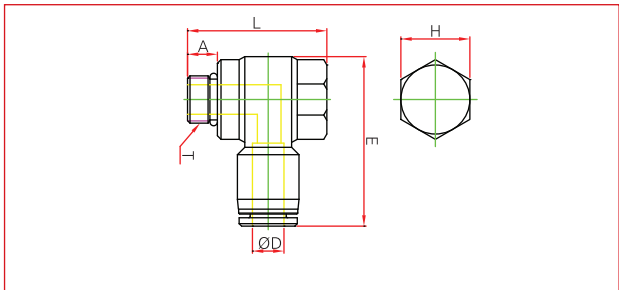

MODEL	ØD	T	E	L	A	H (Hex)	Q'ty per bag	Q'ty per box
PH 04-G01	4	G 1/8	29.5	23.6	5	12	10	50
PH 04-G02	4	G 1/4	33	26.8	7.5	14	10	50
PH 06-G01	6	G 1/8	30	23.6	5	12	10	50
PH 06-G02	6	G 1/4	34	26.8	7.5	14	10	50
PH 06-G03	6	G 3/8	37.5	32	8	19	5	25
PH 08-G01	8	G 1/8	32.5	23.6	5	12	10	50
PH 08-G02	8	G 1/4	37.5	26.8	7.5	14	10	50
PH 08-G03	8	G 3/8	40	32	8	19	5	25
PH 08-G04	8	G 1/2	46	39	10	24	5	25
PH 10-G01	10	G 1/8	37	23.6	5	12	10	50
PH 10-G02	10	G 1/4	41	26.8	7.5	14	10	50
PH 10-G03	10	G 3/8	44	32	8	19	5	25
PH 10-G04	10	G 1/2	49.5	39	10	24	5	25
PH 12-G02	12	G 1/4	42.5	26.8	7.5	14	5	25
PH 12-G03	12	G 3/8	46	32	8	19	5	25
PH 12-G04	12	G 1/2	50	39	10	24	5	20

PKD

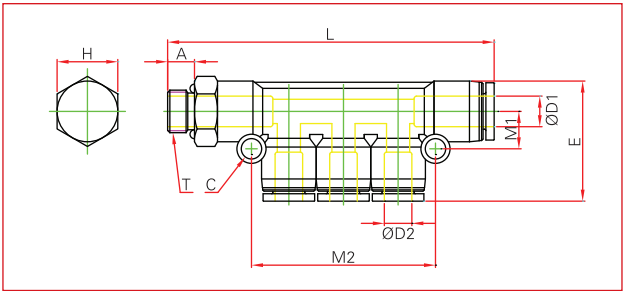

MODEL	ØD1	ØD2	L	E	M1	M2	C	A	H (Hex)	T	Q'ty per bag	Q'ty per box
PKD 04-G01	4	4	67	27	9	41.5	3.2	5.5	14	G 1/8	5	25
PKD 0604-G01	6	4	67	27	9	41.5	3.2	5.5	14	G 1/8	5	25
PKD 0804-G01	8	4	67.5	27	9	41.5	3.2	5.5	14	G 1/8	5	25
PKD 0804-G02	8	4	69	27	9	41.5	3.2	6.5	17	G 1/4	5	25
PKD 06-G01	6	6	67	27	9	41.5	3.2	5.5	14	G 1/8	5	25
PKD 06-G02	6	6	69	27	9	41.5	3.2	5.5	14	G 1/4	5	25
PKD 0806-G01	8	6	68	27	9	41.5	3.2	5.5	14	G 1/8	5	25
PKD 0806-G02	8	6	69	27	9	41.5	3.2	6.5	17	G 1/4	5	25
PKD 08-G02	8	8	86.8	33	12	47.8	4.2	6.5	17	G 1/4	5	25
PKD 08-G03	8	8	86.8	33	12	47.8	4.2	6.5	20	G 3/8	5	25
PKD 1006-G02	10	6	89	33	12	47.8	4.2	6.5	17	G 1/4	5	20
PKD 1006-G03	10	6	87.8	33	12	47.8	4.2	6.5	20	G 3/8	5	20
PKD 1008-G02	10	8	89	33	12	47.8	4.2	6.5	17	G 1/4	5	15
PKD 1008-G03	10	8	89.5	33	12	47.8	4.2	6.5	20	G 3/8	5	15
PKD 10-G02	10	10	97	37.5	12	56.5	3.5	6.5	17	G 1/4	5	15
PKD 10-G03	10	10	97.5	37.5	12	56.5	3.5	6.5	20	G 3/8	5	15
PKD 10-G04	10	10	100.5	37.5	12	56.5	3.5	10	24	G 1/2	5	15
PKD 1208-G03	12	8	97.5	37	15.5	59.5	4.5	6.5	20	G 3/8	5	15
PKD 1208-G04	12	8	101	37	15.5	59.5	4.5	10	24	G 1/2	5	15
PKD 1210-G03	12	10	97.5	38	15.5	59.5	4.5	6.5	20	G 3/8	5	15
PKD 1210-G04	12	10	101	38	15.5	59.5	4.5	10	24	G 1/2	5	15
PKD 12-G03	12	12	101.5	39.7	15.5	67.5	4.5	6.5	20	G 3/8	5	15
PKD 12-G04	12	12	105	39.7	15.5	67.5	4.5	10	24	G 1/2	5	15




POLYURETHANE TUBING WITH ONE-TOUCH FITTING

SPEED CONTROL- LERS

Used in pneumatic piping &

Used for a wide variety of models to meet all needs.

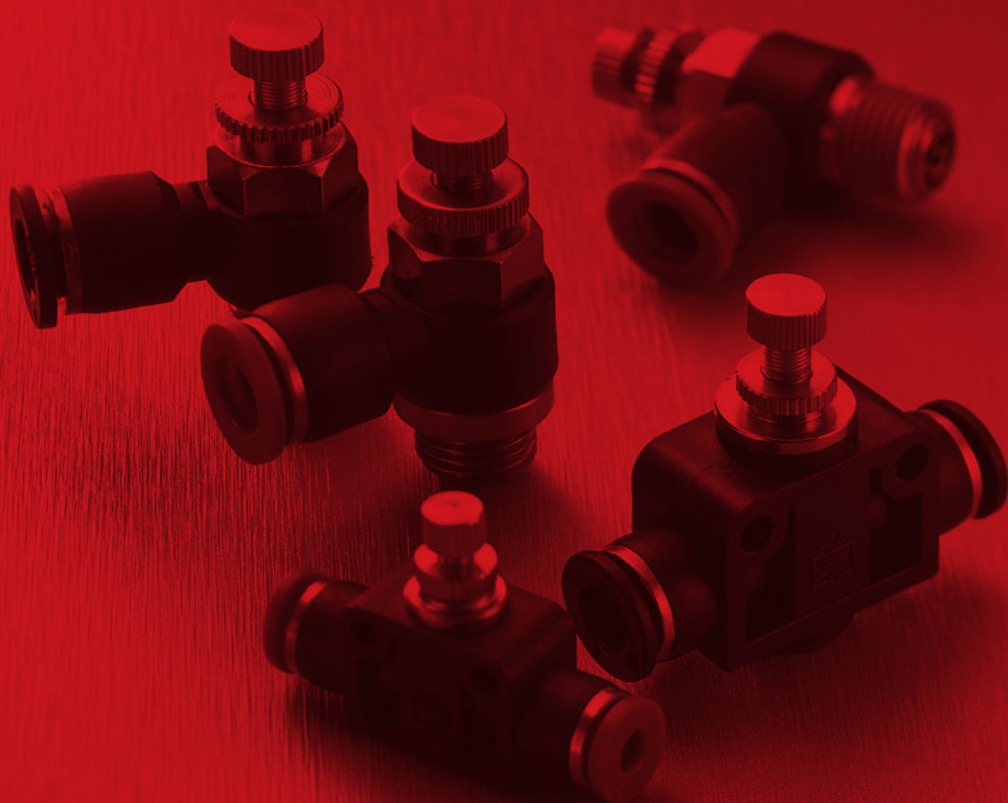

PRODUCT DESCRIPTION

FEATURES / BENEFITS

- Accurate regulation of an optimal airflow rate for precise motion control
- Compact design provides comparable range of speed to larger ones
- Control-out and control-in types are available for all models
- All PT and NPT threads are sealant pre-coated

APPLICATION

- A valve controls the speed of the air pressure actuator
- Mainly installed for the movement of machines such as cylinders, air actuators, etc

SPECIFICATION

- Applicable Fluid Type / AIR (No other type of gas or liquid)
- Working Pressure Range / 0~150PSI / 0~9.9Kgf/cm²(0~990KPa)
- Negative Pressure / -29.5in Hg / -750mmHg(-750Torr)
- Working Temperature Range / 32°F~140°F / 0°C~60°C
- Available for meter-in or meter-out control

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items:

Please specify the following:

1. Series(Item)Number
2. Tube Outside Dia.
3. Thread Size

THREAD SIZE

01:1/8"PT / N01:1/8"NPT / G01:1/8"BSPP
02:1/4"PT / N02:1/4"NPT / G02:1/4"BSPP
03:3/8"PT / N03:3/8"NPT / G03:3/8"BSPP
04:1/2"PT / N04:1/2"NPT / G04:1/2"BSPP

Example of a request


SC series one touch fitting,
8mm tube with 1/4" BSPT thread



SC series one touch fitting,
1/4" tube with 1/4" NPT thread



SC series G type one touch fitting,
8mm tube with 1/4" BSPP thread

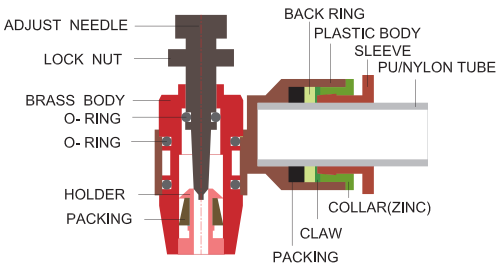


SPEED CONTROLLERS

>METRIC SYSTEM


meter-out control (blue sleeve), meter-in control (red sleeve)

SC elbow swivel rotating type

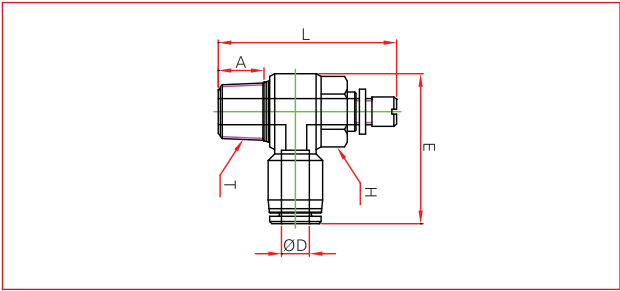

MODEL	ØD	T (Thread)	E	L MAX	A	H (Hex)	Q'ty per bag	Q'ty per box
SC 04-M3	4	M3xP0.5	24.5	38.5	3.5	8	10	100
SC 04-M5	4	M5xP0.8	24.5	37	3.5	8	10	100
SC 04-M6	4	M6xP 1.0	24.5	39.8	4.8	8	10	100
SC 04-01	4	PT 1/8	29.5	41	7.5	12	10	50
SC 04-02	4	PT 1/4	33	48.5	11.4	14	10	50
SC 06-M5	6	M5xP0.8	26.5	38.5	3.5	8	10	100
SC 06-M6	6	M6xP 1.0	26.5	39.8	4.8	8	10	100
SC 06-01	6	PT 1/8	30	41	7.5	12	10	50
SC 06-02	6	PT 1/4	34	48.5	11.4	14	10	50
SC 06-03	6	PT 3/8	37.5	54	12.8	19	5	25
SC 06-04	6	PT 1/2	45.5	60	15.5	24	5	20
SC 08-01	8	PT 1/8	31.5	41	7.5	12	10	50
SC 08-02	8	PT 1/4	37.5	48.5	11.4	14	10	50
SC 08-03	8	PT 3/8	40	54	12.8	19	5	25
SC 08-04	8	PT 1/2	46	60.5	15.5	24	5	20
SC 10-01	10	PT 1/8	37	41	7.5	12	10	50
SC 10-02	10	PT 1/4	41	48.5	11.4	14	5	25
SC 10-03	10	PT 3/8	44	54	12.8	19	5	25
SC 10-04	10	PT 1/2	49.5	61.5	15.5	24	5	20
SC 12-02	12	PT 1/4	42.5	48.5	11.4	14	5	25
SC 12-03	12	PT 3/8	46	54	12.8	19	5	25
SC 12-04	12	PT 1/2	50	60	15.5	24	5	20

SCF union straight

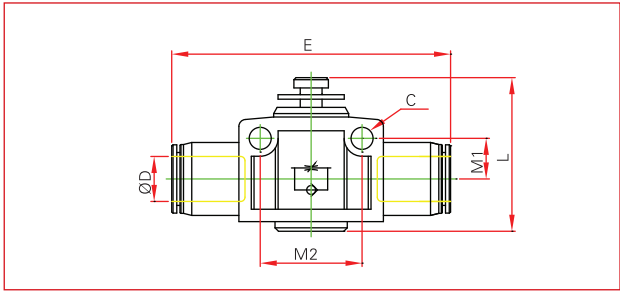


MODEL	ØD	L MAX	E	M1	M2	C	Q'ty per bag	Q'ty per box
SCF 04	4	31.5	40	6.5	14	3.2	10	50
SCF 06	6	43	47	8.5	20	4.2	10	50
SCF 08	8	44	52	9.5	22	4.2	5	25
SCF 10	10	52.5	63.5	11	26	4.2	5	20
SCF 12	12	57	73	14	32	4.2	3	12

SPEED CONTROLLERS

>INCH SYSTEM


meter-out control (black sleeve), meter-in control (red sleeve)

SC elbow swivel rotating type

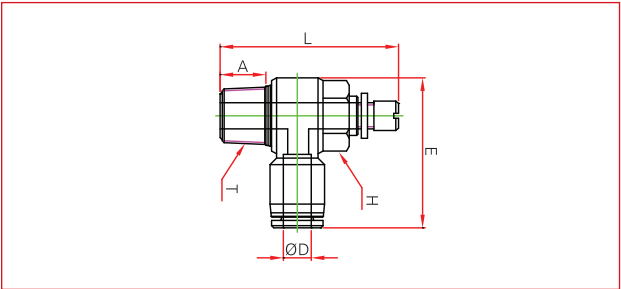

MODEL	ØD	T (Thread)	E	L MAX	A	H (Hex)	Q'ty per bag	Q'ty per box
SC 1/8-UNF	1/8	UNF 10/32	24,5	38,5	3,5	8	10	100
SC 5/32-UNF	5/32	UNF 10/32	24,5	37	3,5	8	10	100
SC 5/32-N01	5/32	NPT 1/8	29,5	41	7,5	12	10	50
SC 5/32-N02	5/32	NPT 1/4	33	48,5	11,4	14	10	50
SC 3/16-UNF	3/16	UNF 10/32	24,5	38,5	3,5	8	10	100
SC 3/16-N01	3/16	NPT 1/8	29,5	41	7,5	12	10	50
SC 3/16-N02	3/16	NPT 1/4	33	48,5	11,4	14	10	50
SC 1/4-UNF	1/4	UNF 10/32	26,5	38,5	3,5	8	10	100
SC 1/4-N01	1/4	NPT 1/8	30	41	7,5	12	10	50
SC 1/4-N02	1/4	NPT 1/4	34	48,5	11,4	14	10	50
SC 1/4-N03	1/4	NPT 3/8	37,5	54	12,8	19	5	25
SC 1/4-N04	1/4	NPT 1/2	45,5	60,5	15,5	24	5	20
SC 5/16-N01	5/16	NPT 1/8	31,5	41	7,5	12	10	50
SC 5/16-N02	5/16	NPT 1/4	37,5	48,5	11,4	14	10	50
SC 5/16-N03	5/16	NPT 3/8	40	54	12,8	19	5	25
SC 5/16-N04	5/16	NPT 1/2	46	60,5	15,5	24	5	20
SC 3/8-N01	3/8	NPT 1/8	37	41	7,5	12	10	50
SC 3/8-N02	3/8	NPT 1/4	41	48,5	11,4	14	5	25
SC 3/8-N03	3/8	NPT 3/8	44	54	12,8	19	5	25
SC 3/8-N04	3/8	NPT 1/2	49,5	61,5	15,5	24	5	20
SC 1/2-N02	1/2	NPT 1/4	42,5	48,5	11,4	14	5	25
SC 1/2-N03	1/2	NPT 3/8	46	54	12,8	19	5	25
SC 1/2-N04	1/2	NPT 1/2	50	60	15,5	24	5	20

SCF

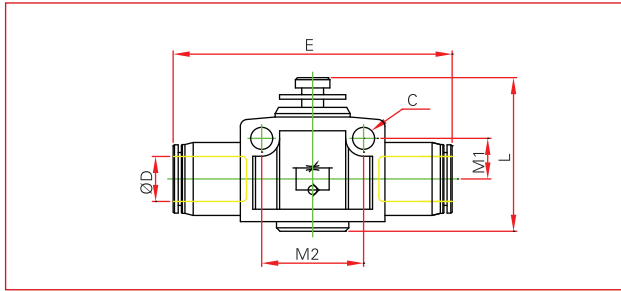


MODEL	ØD	L MAX	E	M1	M2	C	Q'ty per bag	Q'ty per box
SCF 5/32	5/32	31,5	40	6,5	14	3,2	10	50
SCF 3/16	3/16	31,5	40	6,5	14	3,2	10	50
SCF 1/4	1/4	44,5	47	8,5	20	4,2	10	50
SCF 5/16	5/16	51,7	52	9,5	22	4,2	5	25
SCF 3/8	3/8	52,5	63,5	11	26	4,2	5	20
SCF 1/2	1/2	57	73	14	32	4,2	3	12

SPEED CONTROLLERS / G TYPE

> METRIC SYSTEM, BSPP, WITH INTEGRAL O-RING SEAL

SC elbow
swivel rotating type

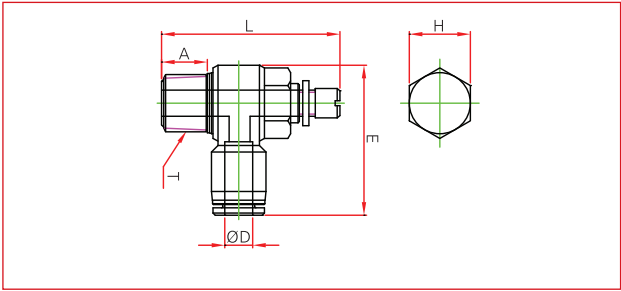

MODEL	ØD	T (Thread)	E	L MAX	A	H (Hex)	Q'ty per bag	Q'ty per box
SC 04-G01	4	G 1/8	29.5	41	6.5	12	10	50
SC 04-G02	4	G 1/4	33	48	8.5	14	10	50
SC 06-G01	6	G 1/8	30	41	6.5	12	10	50
SC 06-G02	6	G 1/4	34	49	8.5	14	10	50
SC 06-G03	6	G 3/8	37.5	55	10	19	5	25
SC 06-G04	6	G 1/2	46	61	11.5	24	5	20
SC 08-G01	8	G 1/8	32.5	41	6.5	12	10	50
SC 08-G02	8	G 1/4	37.5	48	8.5	14	10	50
SC 08-G03	8	G 3/8	40	54	10	19	5	25
SC 08-G04	8	G 1/2	46	60	11.5	24	5	20
SC 10-G01	10	G 1/8	37	41	6.5	12	10	50
SC 10-G02	10	G 1/4	41	50	8.5	14	5	25
SC 10-G03	10	G 3/8	44	54	10	19	5	25
SC 10-G04	10	G 1/2	49.5	61	11.5	24	5	20
SC 12-G02	12	G 1/4	42.5	50	8.5	14	5	25
SC 12-G03	12	G 3/8	46	55	10	19	5	25
SC 12-G04	12	G 1/2	50	62.5	11.5	24	5	20



REINFORCED POLYURETHANE AIR HOSE
WITH QUICK COUPLER



COMPACT ONE-TOUCH FITTINGS

Used in pneumatic piping &

Used for a wide variety of models to meet all needs.



PRODUCT DESCRIPTION

FEATURES/BENEFITS

- One-Touch push-to-connect configuration allows for instant tubing connection
- All PC models are useful for piping in confined spaces, due to its six-angle wrench processing inside
- Immediate strong engineering plastic(POM) sleeve disconnection by pressing the sleeve and then simply removing tube from fitting
- Fittings are already equipped with Teflon-treatment or o-ring on the thread
- Nickel-plated brass body ensures anti-contamination properties for an extended product life

SPECIFICATION

- Applicable Fluid Type / AIR (No other type of gas or liquid)
- Working Pressure Range / 0~150PSI / 0~9.9Kgf/cm²(0~990KPa)
- Negative Pressure / -29.5in Hg / -750mmHg(-750Torr)
- Working Temperature Range / 32°F~140°F / 0°C~60°C

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items:

Please specify the following:

1. Series(Item)Number
2. Tube Outside Dia.
3. ThreaCd Size
4. Type

THREAD SIZE

- 01C:1/8"
- 02C:1/4"
- 03C:3/8"
- 04C:1/2"

Example of an request


PC compact one touch fitting,
4mm tube with 1/8" BSPT thread



COMPACT ONE-TOUCH FITTINGS


>METRIC SYSTEM

PC male straight

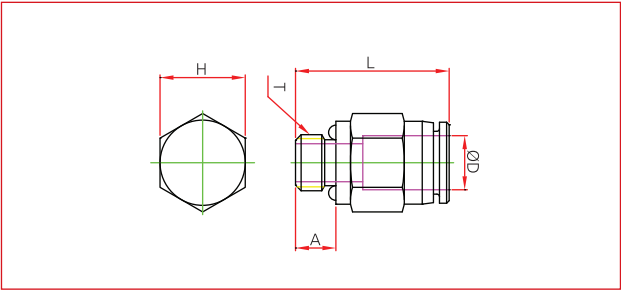


MODEL	ØD	T	L	A	H (Hex)	Q'ty per bag	Q'ty per box
PC 03M3C	3	M3xP0.5	16	3	8	10	100
PC 03M5C	3	M5xP0.8	16	4	8	10	100
PC 03M6C	3	M6xP1.0	16	4	8	10	100
PC 0301C	3	PT 1/8	16	8	10	10	100
PC 04M3C	4	M3xP0.5	17.5	3	8	10	100
PC 04M5C	4	M5xP0.8	17.5	4	8	10	100
PC 04M6C	4	M6xP1.0	17.5	4	8	10	100
PC 0401C	4	PT 1/8	17.5	8	10	10	100
PC 06M5C	6	M5xP0.8	17.5	4	10	10	100
PC 06M6C	6	M6xP1.0	17.5	4	10	10	100
PC 0601C	6	PT 1/8	18.5	8	10	10	100

PT male branch tee

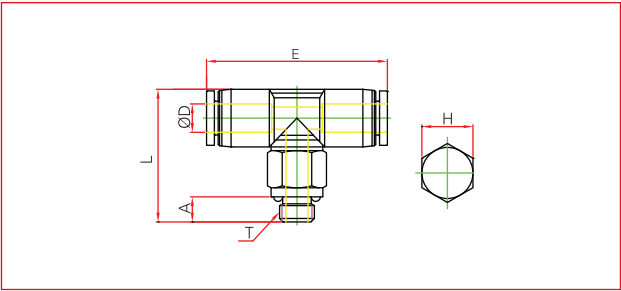


MODEL	ØD	T	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
PT 03M3C	3	M3xP0.5	18.8	24	3	8	10	100
PT 03M5C	3	M5xP0.8	19.8	24	4	8	10	100
PT 03M6C	3	M6xP1.0	19.8	24	4	8	10	100
PT 04M3C	4	M3xP0.5	21	29	3	8	10	100
PT 04M5C	4	M5xP0.8	21	29	4	8	10	100
PT 04M6C	4	M6xP1.0	21	29	4	8	10	100
PT 0401C	4	PT 1/8	24	29	8	10	10	100
PT 06M5C	6	M5xP0.8	24	32.5	4	8	10	100
PT 06M6C	6	M6xP1.0	24	32.5	4	8	10	100
PT 0601C	6	PT 1/8	25	32.5	8	10	10	100

PCF female straight

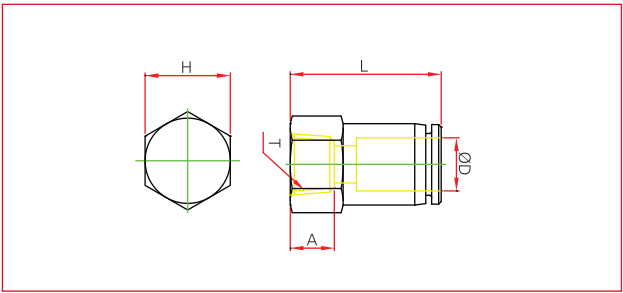

MODEL	ØD	T	L	A	H (Hex)	Q'ty per bag	Q'ty per box
PCF 03M3C	3	M3xP0.5	15.5	3	8	10	100
PCF 03M5C	3	M5xP0.8	17.5	5	8	10	100
PCF 03M6C	3	M6xP1.0	17.5	5	8	10	100
PCF 04M3C	4	M3xP0.5	17.5	3	8	10	100
PCF 04M5C	4	M5xP0.8	19	5	8	10	100
PCF 04M6C	4	M6xP1.0	19	5	8	10	100
PCF 0401C	4	PT 1/8	22	7.5	12	10	100
PCF 06M5C	6	M5xP0.8	19	5	10	10	100
PCF 06M6C	6	M6xP1.0	19	5	10	10	100
PCF 0601C	6	PT 1/8	22	7.5	12	10	100

PL male elbow

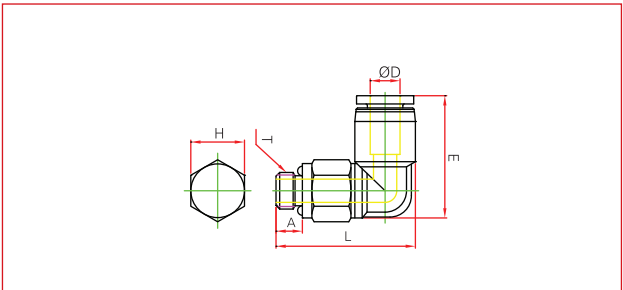


MODEL	ØD	T	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
PL 03M3C	3	M3xP0.5	19	15.5	3	8	10	100
PL 03M5C	3	M5xP0.8	20	15.5	4	8	10	100
PL 03M6C	3	M6xP1.0	20	15.5	4	8	10	100
PL 04M3C	4	M3xP0.5	20	18.5	3	8	10	100
PL 04M5C	4	M5xP0.8	21	18.5	4	8	10	100
PL 04M6C	4	M6xP1.0	21	18.5	4	8	10	100
PL 0401C	4	PT 1/8	24	18.5	8	10	10	100
PL 06M5C	6	M5xP0.8	22	20.5	4	8	10	100
PL 06M6C	6	M6xP1.0	23	20.5	4	10	10	100
PL 0601C	6	PT 1/8	24	20.5	8	10	10	100

COMPACT ONE-TOUCH FITTINGS


>METRIC SYSTEM

PST male run tee

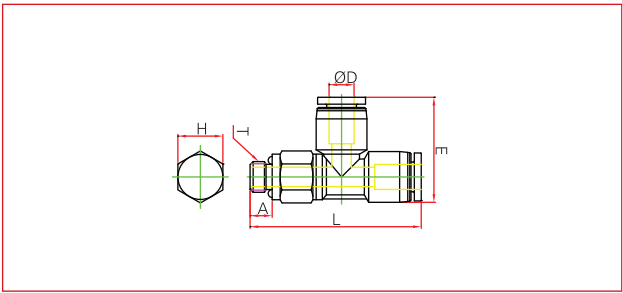


MODEL	ØD	T	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
PST 03M3C	3	M3xP0.5	27.5	16	3	8	10	100
PST 03M5C	3	M5xP0.8	28.5	16	4	8	10	100
PST 03M6C	3	M6xP1.0	28.5	16	4	8	10	100
PST 04M3C	4	M3xP0.5	29.5	19	3	8	10	100
PST 04M5C	4	M5xP0.8	32	19	4	8	10	100
PST 04M6C	4	M6xP1.0	30.5	19	4	8	10	100
PST 0401C	4	PT 1/8	34.5	19	8	10	10	100
PST 06M5C	6	M5xP0.8	33.5	21.5	4	8	10	100
PST 06M6C	6	M6xP1.0	33.5	21.5	4	8	10	100
PST 0601C	6	PT 1/8	36	21.5	8	10	10	100

POC round male straight

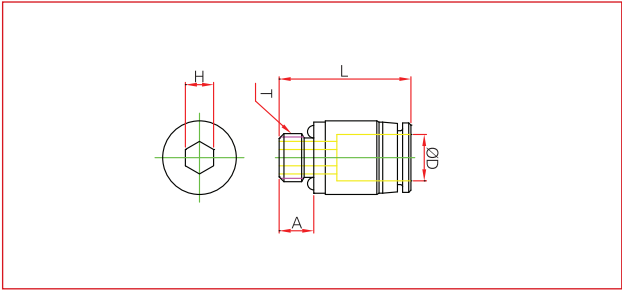


MODEL	ØD	T	L	A	H (Hex)	Q'ty per bag	Q'ty per box
POC 03M3C	3	M3xP0.5	16	3	1.5	10	100
POC 03M5C	3	M5xP0.8	16	4	2	10	100
POC 03M6C	3	M6xP1.0	16	4	2	10	100
POC 04M3C	4	M3xP0.5	16	3	1.5	10	100
POC 04M5C	4	M5xP0.8	17.5	4	2	10	100
POC 04M6C	4	M6xP1.0	17.5	4	2	10	100
POC 0401C	4	PT 1/8	17.5	8	3	10	100
POC 06M5C	6	M5xP0.8	17.5	4	2	10	100
POC 06M6C	6	M6xP1.0	17.5	4	2	10	100
POC 0601C	6	PT 1/8	18.5	8	4	10	100

PUC union straight

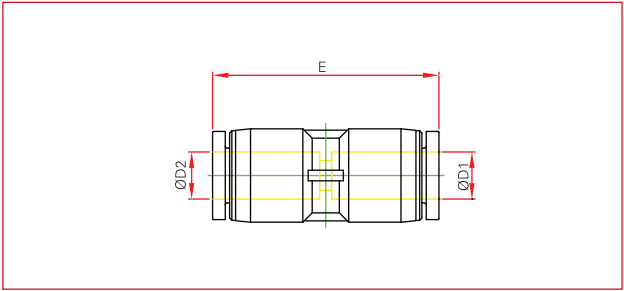


MODEL	ØD1	ØD2	E	Q'ty per bag	Q'ty per box
PUC 03C	3	3	23.5	10	100
PUC 04C	4	4	27.5	10	100
PUC 06C	6	6	28	10	100

PUT union tee

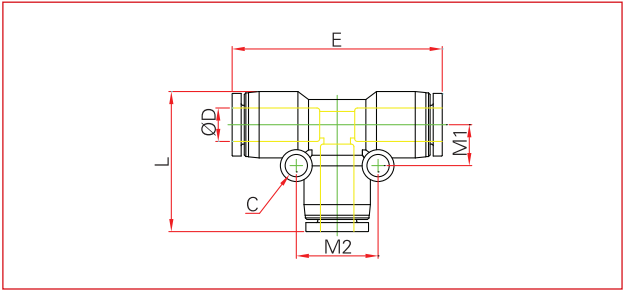

MODEL	ØD	L	E	C	M1	M2	Q'ty per bag	Q'ty per box
PUT 03C	3	15.5	24	3.2	4.9	9.8	10	100
PUT 04C	4	19.5	30	3.2	6	12	10	100
PUT 06C	6	22	33	3.2	6.5	13	10	100

PMM bulkhead union

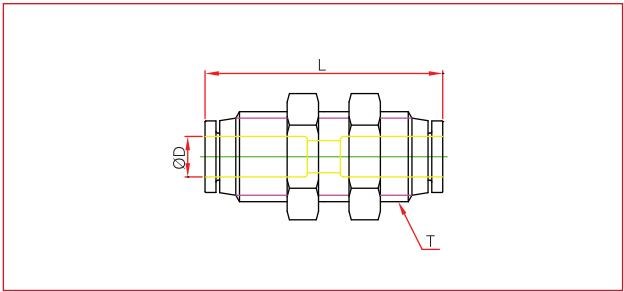


MODEL	ØD	T	L	Q'ty per bag	Q'ty per box
PMM 03C	3	M8xP0.75	20.5	10	100
PMM 04C	4	M10xP1.0	24	10	100
PMM 06C	6	M12xP1.0	23.5	10	100

COMPACT ONE-TOUCH FITTINGS


>METRIC SYSTEM

PY union Y

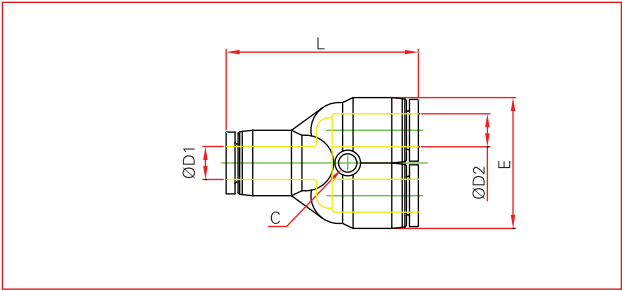



MODEL	ØD1	ØD2	L	E	C	Q'ty per bag	Q'ty per box
PY 03C	3	3	27	14.5	3.2	10	100
PY 04C	4	4	30	18	3.2	10	100
PY 06C	6	6	32.8	22	3.2	10	100

PW

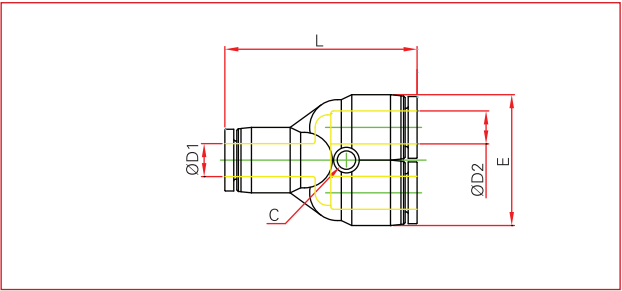


MODEL	ØD1	ØD2	L	E	C	Q'ty per bag	Q'ty per box
PW 0403C	4	3	27	14.5	3.2	10	100
PW 0604C	6	4	30	18	3.2	10	100

PUL union elbow

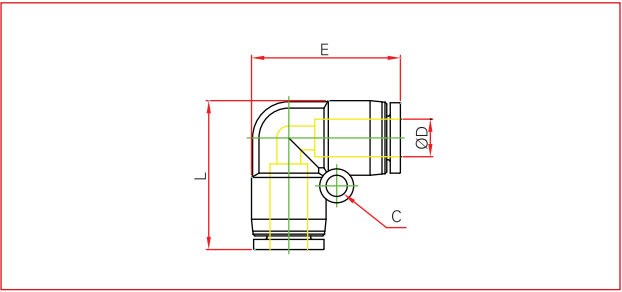


MODEL	ØD	L	E	C	Q'ty per bag	Q'ty per box
PUL 03C	3	15.5	15.5	3.2	10	100
PUL 04C	4	19.3	19.3	3.2	10	100
PUL 06C	6	21.6	21.6	3.2	10	100


PG reducer

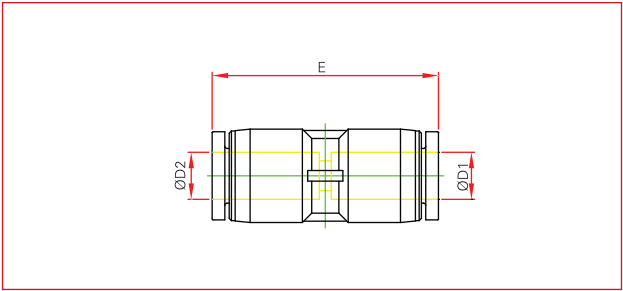

MODEL	ØD1	ØD2	E	Q'ty per bag	Q'ty per box
PG 04-03C	4	3	27.3	10	100
PG 06-04C	6	4	27.5	10	100

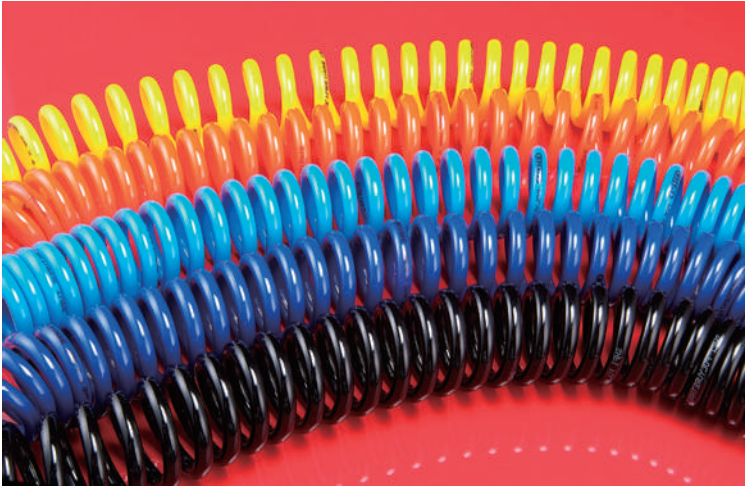

COILED POLYURETHANE TUBING

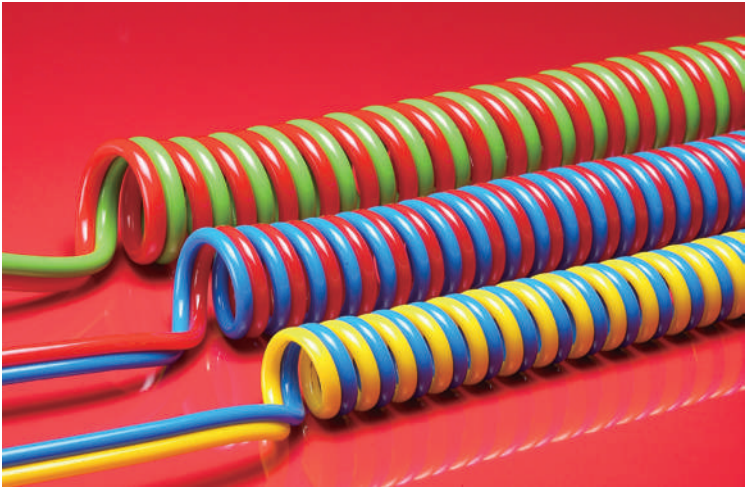

COILED POLYURETHANE TWIN TUBING

STOP FITTINGS

Used in pneumatic piping &

Used for a wide variety of models to meet all needs.



PRODUCT DESCRIPTION

FEATURES

- Air is completely blocked when the tube is released
- The air flows again only after connection is safely secured
- The air flows only when the tube is connected

SPECIFICATION

- Applicable Fluid Type / AIR (No other type of gas or liquid)
- Working Pressure Range / 0~150PSI / 0~9.9Kgf/cm²(0~990KPa)
- Negative Pressure / -29.5in Hg / -750mmHg(-750Torr)
- Working Temperature Range / 32~140°F / 0~60°C

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items

Please specify the following:

1. Series(Item)Number
2. Tube Outside Dia.
3. Thread Size

THREAD SIZE

- 01:1/8"PT
- 02:1/4"PT
- 03:3/8"PT
- 04:1/2"PT

Example of a request

SPC series stop fitting,
8mm tube with 1/4" BSPT thread

SPC

08

02

• Series

• Tube Dia


• Thread size



STOP FITTINGS


>METRIC SYSTEM

SPC straight

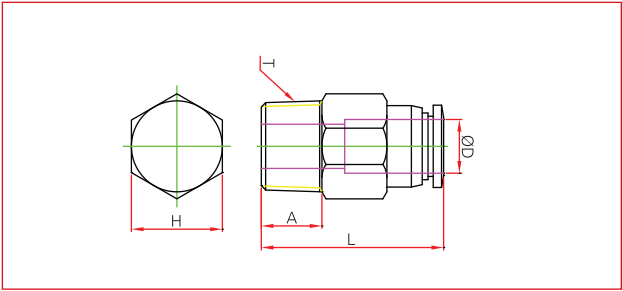


MODEL	ØD	T	L	A	H (Hex)	Q'ty per bag	Q'ty per box
SPC 04-01	4	PT 1/8	24.8	8	10	10	100
SPC 06-01	6	PT 1/8	25	8	12	10	100
SPC 06-02	6	PT 1/4	27	10	14	10	100
SPC 08-02	8	PT 1/4	33.3	10	14	10	100
SPC 08-03	8	PT 3/8	33.3	11	17	10	100
SPC 10-02	10	PT 1/4	35.9	10	17	10	50
SPC 10-03	10	PT 3/8	35.9	11	17	10	50
SPC 10-04	10	PT 1/2	36.9	14	21	10	50
SPC 12-03	12	PT 3/8	37	11	21	10	50
SPC 12-04	12	PT 1/2	37	14	21	10	50

SPL elbow

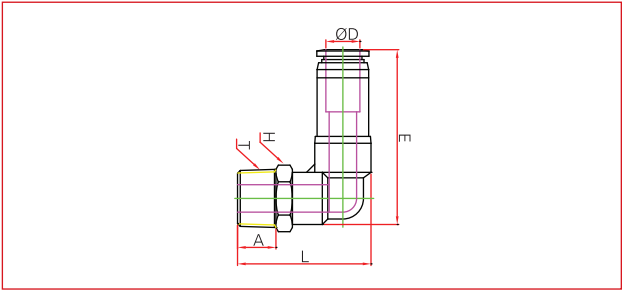

MODEL	ØD	T	L	E	A	H (Hex)	Q'ty per bag	Q'ty per box
SPL 04-M5	4	M5xP0.8	26.5	36.3	4	10	10	100
SPL 04-M6	4	M6xP1.0	26.5	36.3	4	10	10	100
SPL 04-01	4	PT 1/8	30	36.3	8	10	10	100
SPL 06-M5	6	M5xP0.8	28	37	4	12	10	100
SPL 06-01	6	PT 1/8	31.5	37	8	12	10	100
SPL 06-02	6	PT 1/4	34	37	10	14	10	50
SPL 08-01	8	PT 1/8	35	45.5	8	14	10	50
SPL 08-02	8	PT 1/4	37	45.5	10	14	10	50
SPL 10-02	10	PT 1/4	44	53	10	17	10	50
SPL 10-03	10	PT 3/8	45	53	11	17	10	50
SPL 10-04	10	PT 1/2	48	53	14	21	5	25
SPL 12-03	12	PT 3/8	47.5	56.5	11	19	5	25
SPL 12-04	12	PT 1/2	51	56.5	14	21	5	25

SPU union straight

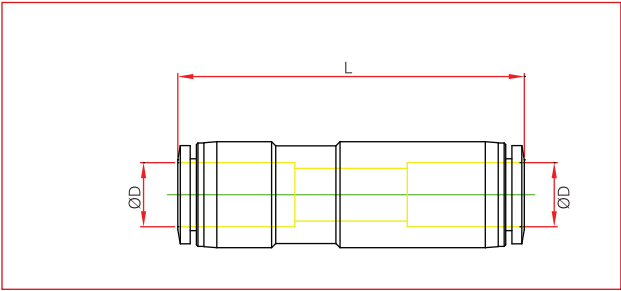

MODEL	ØD	L	Q'ty per bag	Q'ty per box
SPU 04	4	44.5	10	50
SPU 06	6	47.5	10	50
SPU 08	8	54.5	10	50
SPU 10	10	64.5	5	25
SPU 12	12	66	5	25



FLEXIBLE REINFORCED PVC HOSE & HOSE REEL

CHECK VALVES

Used in pneumatic piping &

Used for a wide variety of models to meet all needs.



PRODUCT DESCRIPTION

FEATURES

- Suitable for low pressure applications
- This valve allows compressed air from one side to flow and blocks the inverse flow to protect and maintain the vacuum line
- Easily applied to low pressure piping

SPECIFICATION

- Applicable Fluid Type / AIR (No other type of gas or liquid)
- Working Pressure Range / 0~150PSI / 0~9.9Kgf/cm²(0~990KPa)
- Negative Pressure / -29.5in Hg / -750mmHg(-750Torr)
- Working Temperature Range / 32~140°F / 0~60°C

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items
Please specify the following:


1. Series(Item)Number
2. Tube Outside Dia.
3. Thread Size

THREAD SIZE

- 01:1/8"PT
- 02:1/4"PT
- 03:3/8"PT
- 04:1/2"PT

Example of a request


CVPC series check valves,
8mm tube with 1/4" BSPT thread

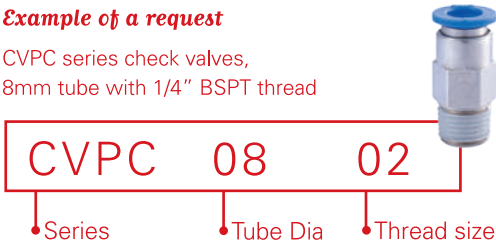

CHECK VALVES


>METRIC SYSTEM

CVPC straight

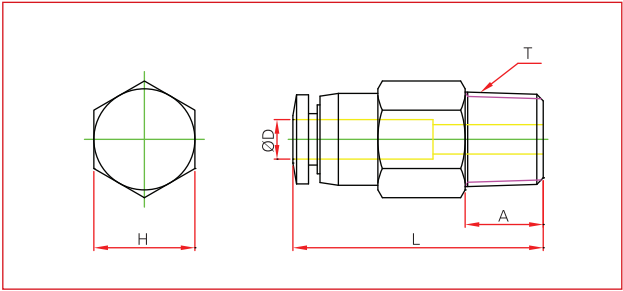



MODEL	ØD	T	L	A	H (Hex)	Q'ty per bag	Q'ty per box
CVPC 04M5	4	M5xP0.8	32.9	3.5	10	10	100
CVPC 04M6	4	M6xP1.0	32.9	4	10	10	100
CVPC 0401	4	PT 1/8	28.1	8	10	10	100
CVPC 0601	6	PT 1/8	29.7	8	12	10	100
CVPC 0602	6	PT 1/4	29.7	10	14	10	50
CVPC 0801	8	PT 1/8	32.7	8	14	10	50
CVPC 0802	8	PT 1/4	35.1	10	14	10	50
CVPC 0803	8	PT 3/8	35.1	11	17	10	50
CVPC 1002	10	PT 1/4	44	10	17	10	50
CVPC 1003	10	PT 3/8	44	11	17	10	50
CVPC 1004	10	PT 1/2	44	14	21	5	25
CVPC 1203	12	PT 3/8	42.6	11	21	5	25
CVPC 1204	12	PT 1/2	42.6	14	21	5	25

CVPF bush

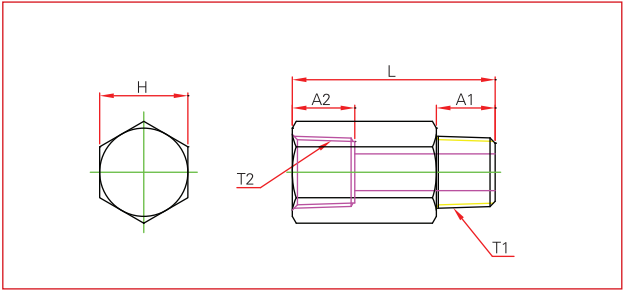

MODEL	T1	T2	L	A1	A2	H (Hex)	Q'ty per bag	Q'ty per box
CVPF 01-01	PT 1/8	PT 1/8	28	8	8	12	10	100
CVPF 02-02	PT 1/4	PT 1/4	33.4	10	10	17	10	50
CVPF 03-03	PT 3/8	PT 3/8	40	11	11	20	5	25
CVPF 04-04	PT 1/2	PT 1/2	44	14	14	24	5	25

CVPU union sraight

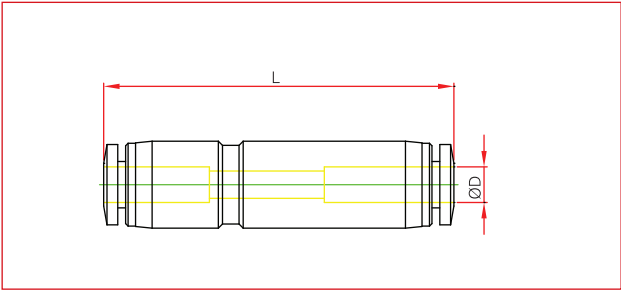

MODEL	ØD	L	Q'ty per bag	Q'ty per box
CVPU 04	4	44.5	10	100
CVPU 06	6	47.5	10	50
CVPU 08	8	54	10	50
CVPU 10	10	63.5	5	25
CVPU 12	12	65	5	25



ANTI-SPARK DUAL LAYER TUBING

HAND VALVES

Used for switching compressed air.



PRODUCT DESCRIPTION

FEATURES / BENEFITS

- When off, the three-way direction control valve discharges the residual pressure and blocks air flow-in
- This product switches air pressure devices' air on/off by simply turning the handle
- Maintenance or inspection is possible when the remaining pressure in the device is removed
- A three-way valve discharges the remaining pressure out and blocks the incoming air in the off state
- There are 4 types available depending on the way it is applied to the air pressure flow

APPLICATION

- Used for turning air pressure on and off for pneumatic devices

SPECIFICATION

- Fluid type : Air (no other gases or liquids)
- Working pressure : 0~150PSI / 0~9.9kgf / cm² (0~990kpa)
- Negative pressure : -29.5in Hg / -750mmHg (-750Torr)
- Working temperature : 32~140°F / 0~60°C
- Applicable tube : Polyurethane and Nylon

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items:

Please specify the following:

1. Series(Item)Number
2. Tube Outside Dia.
3. Thread Size

THREAD SIZE

- 01:1/8"BSPT
- 02:1/4"BSPT
- 03:3/8"BSPT
- 04:1/2"BSPT


Example of a request

HVFS series

8mm tube with 1/4"BSPT thread




HVFS Straight Fitting Thread

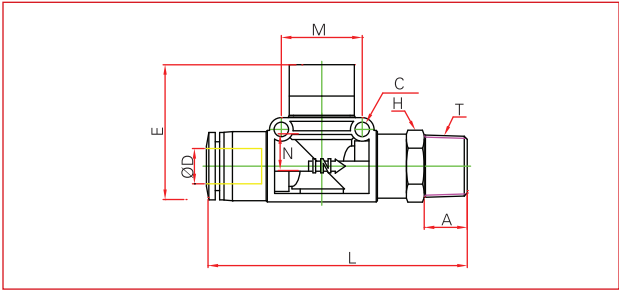


MODEL	ØD	L	E	M	N	C	T	A	H (Hex)	Q'ty per bag	Q'ty per box
HVFS 06-1/8	6	59.8	37.5	19	8	3.5	PT 1/8	8	12	5	25
HVFS 06-1/4	6	62	37.5	19	8	3.5	PT 1/4	10	14	5	25
HVFS 06-3/8	6	62.5	37.5	19	8	3.5	PT 3/8	11	17	5	25
HVFS 08-1/8	8	60	37.5	19	8	3.5	PT 1/8	8	12	5	25
HVFS 08-1/4	8	62.5	37.5	19	8	3.5	PT 1/4	10	14	5	25
HVFS 08-3/8	8	64	37.5	19	8	3.5	PT 3/8	11	17	5	25
HVFS 10-1/4	10	78	40.5	24	11	3.5	PT 1/4	10	17	5	20
HVFS 10-3/8	10	79	40.5	24	11	3.5	PT 3/8	11	17	5	20
HVFS 10-1/2	10	83.5	40.5	24	11	3.5	PT 1/2	14	21	3	15
HVFS 12-1/4	12	78.3	40.5	24	11	3.5	PT 1/4	10	17	3	15
HVFS 12-3/8	12	79.3	40.5	24	11	3.5	PT 3/8	11	17	5	15
HVFS 12-1/2	12	82.8	40.5	24	11	3.5	PT 1/2	14	21	3	15

HVFF Union Straight

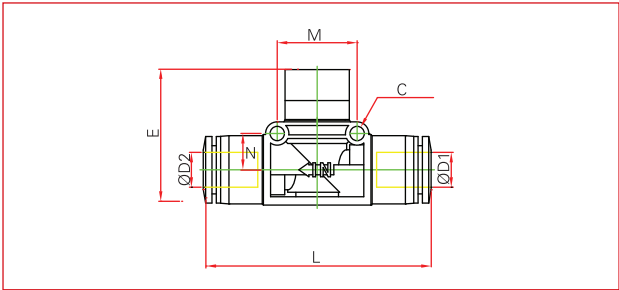


MODEL	ØD1	ØD2	L	E	M	N	C	Q'ty per bag	Q'ty per box
HVFF06-06	6	6	52.5	37.5	19	8	3.5	5	25
HVFF08-06	8	6	52.5	37.5	19	8	3.5	5	25
HVFF08-08	8	8	53	37.5	19	8	3.5	5	25
HVFF10-08	10	8	68	40.5	24	11	3.5	5	20
HVFF10-10	10	10	68.5	40.5	24	11	3.5	5	20
HVFF12-10	12	10	68.5	40.5	24	11	3.5	5	20
HVFF12-12	12	12	69	40.5	24	11	3.5	5	20

HVSF Thread-Fitting

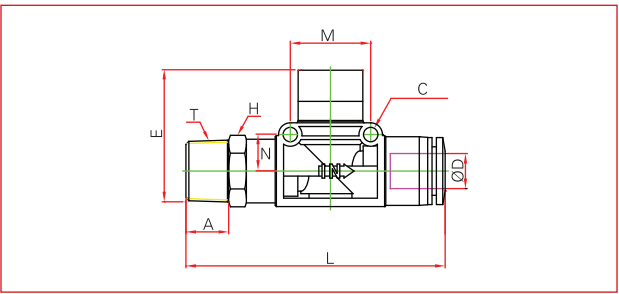

MODEL	ØD	L	E	M	N	C	T	A	H (Hex)	Q'ty per bag	Q'ty per box
HVSF1/8-06	6	59.8	37.5	19	8	3.5	PT 1/8	8	12	5	25
HVSF1/4-06	6	62	37.5	19	8	3.5	PT 1/4	10	14	5	25
HVSF3/8-06	6	62.5	37.5	19	8	3.5	PT 3/8	11	17	5	25
HVSF1/8-08	8	60	37.5	19	8	3.5	PT 1/8	8	12	5	25
HVSF1/4-08	8	62.5	37.5	19	8	3.5	PT 1/4	10	14	5	25
HVSF3/8-08	8	64	37.5	19	8	3.5	PT 3/8	11	17	5	25
HVSF1/4-10	10	78	40.5	24	11	3.5	PT 1/4	10	17	5	20
HVSF3/8-10	10	79	40.5	24	11	3.5	PT 3/8	11	17	5	20
HVSF1/2-10	10	83.5	40.5	24	11	3.5	PT 1/2	14	21	3	15
HVSF1/4-12	12	78.3	40.5	24	11	3.5	PT 1/4	10	17	3	15
HVSF3/8-12	12	79.3	40.5	24	11	3.5	PT 3/8	11	17	5	15
HVSF1/2-12	12	82.8	40.5	24	11	3.5	PT 1/2	14	21	3	15


HVSS Nipple

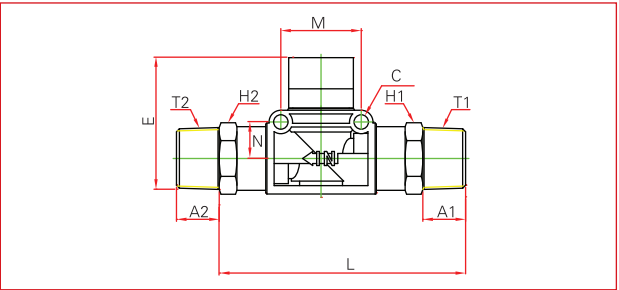

MODEL	L	E	M	N	C	T1	A1	H1 (Hex)	T2	A2	H2 (Hex)	Q'ty per bag	Q'ty per box
HVSS1/8-1/8	67.4	37.5	19	8	3.5	PT 1/8	8	12	PT 1/8	8	12	5	25
HVSS1/4-1/8	69.8	37.5	19	8	3.5	PT 1/4	10	14	PT 1/8	8	12	5	25
HVSS1/4-1/4	72.2	37.5	19	8	3.5	PT 1/4	10	14	PT 1/4	10	14	5	25
HVSS3/8-1/4	89	40.5	24	11	3.5	PT 3/8	11	17	PT 1/4	10	17	5	20
HVSS3/8-3/8	90	40.5	24	11	3.5	PT 3/8	11	17	PT 3/8	11	17	5	20
HVSS1/2-3/8	93.5	40.5	24	11	3.5	PT 1/2	14	21	PT 3/8	11	21	3	15
HVSS1/2-1/2	97	40.5	24	11	3.5	PT 1/2	14	21	PT 1/2	14	21	3	15


HAND VALVES

HVFS Straight Fitting Thread

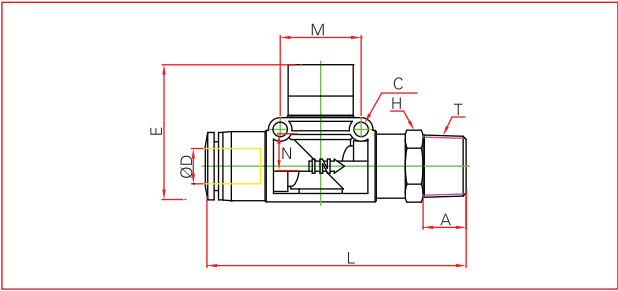



MODEL	ØD	L	E	M	N	C	T	A	H (Hex)	Q'ty per bag	Q'ty per box
HVFS 1/4-N01	1/4	59.8	37.5	19	8	3.5	NPT 1/8	8	1/2	5	25
HVFS 1/4-N02	1/4	62	37.5	19	8	3.5	NPT 1/4	10	9/16	5	25
HVFS 1/4-N03	1/4	62.5	37.5	19	8	3.5	NPT 3/8	11	11/16	5	25
HVFS 5/16-N01	5/16	60	37.5	19	8	3.5	NPT 1/8	8	1/2	5	25
HVFS 5/16-N02	5/16	62.5	37.5	19	8	3.5	NPT 1/4	10	9/16	5	25
HVFS 5/16-N03	5/16	64	37.5	19	8	3.5	NPT 3/8	11	11/16	5	25
HVFS 3/8-N02	3/8	78	40.5	24	11	3.5	NPT 1/4	10	9/16	5	20
HVFS 3/8-N03	3/8	79	40.5	24	11	3.5	NPT 3/8	11	11/16	5	20
HVFS 3/8-N04	3/8	83.5	40.5	24	11	3.5	NPT 1/2	14	7/8	3	15
HVFS 1/2-N02	1/2	78.3	40.5	24	11	3.5	NPT 1/4	10	9/16	3	15
HVFS 1/2-N03	1/2	79.3	40.5	24	11	3.5	NPT 3/8	11	11/16	5	15
HVFS 1/2-N04	1/2	82.8	40.5	24	11	3.5	NPT 1/2	14	7/8	3	15

HVFF Union Straight

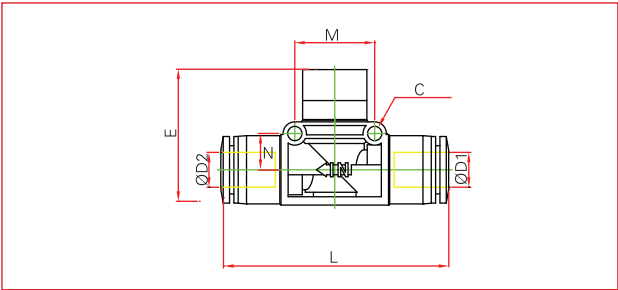


MODEL	ØD1	ØD2	L	E	M	N	C	Q'ty per bag	Q'ty per box
HVFF 1/4-1/4	1/4	1/4	52.5	37.5	19	8	3.5	5	25
HVFF 5/16-1/4	5/16	5/16	52.5	37.5	19	8	3.5	5	25
HVFF 5/16-5/16	5/16	5/16	53	37.5	19	8	3.5	5	25
HVFF 3/8-5/16	3/8	3/8	68	40.5	24	11	3.5	5	20
HVFF 3/8-3/8	3/8	3/8	68.5	40.5	24	11	3.5	5	20
HVFF 1/2-8/3	1/2	1/2	68.5	40.5	24	11	3.5	5	20
HVFF 1/2-1/2	1/2	1/2	69	40.5	24	11	3.5	5	20

HVSF Thread-Fitting

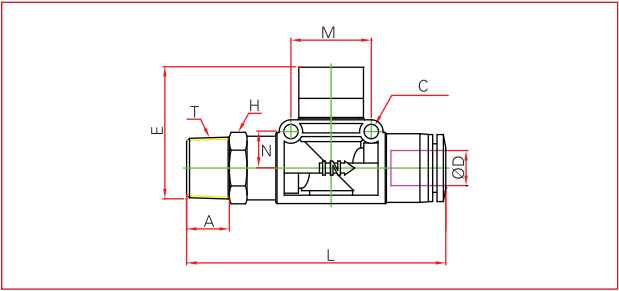

MODEL	ØD	L	E	M	N	C	T	A	H (Hex)	Q'ty per bag	Q'ty per box
HVSF N01-1/4	1/4	59.8	37.5	19	8	3.5	NPT 1/8	8	1/2	5	25
HVSF N02-1/4	1/4	62	37.5	19	8	3.5	NPT 1/4	10	9/16	5	25
HVSF N03-1/4	1/4	62.5	37.5	19	8	3.5	NPT 3/8	11	11/16	5	25
HVSF N01-5/16	5/16	60	37.5	19	8	3.5	NPT 1/8	8	1/2	5	25
HVSF N02-5/16	5/16	62.5	37.5	19	8	3.5	NPT 1/4	10	9/16	5	25
HVSF N03-5/16	5/16	64	37.5	19	8	3.5	NPT 3/8	11	11/16	5	25
HVSF N02-3/8	3/8	78	40.5	24	11	3.5	NPT 1/4	10	9/16	5	20
HVSF N03-3/8	3/8	79	40.5	24	11	3.5	NPT 3/8	11	11/16	5	20
HVSF N04-3/8	3/8	83.5	40.5	24	11	3.5	NPT 1/2	14	7/8	3	15
HVSF N02-1/2	1/2	78.3	40.5	24	11	3.5	NPT 1/4	10	9/16	3	15
HVSF N03-1/2	1/2	79.3	40.5	24	11	3.5	NPT 3/8	11	11/16	5	15
HVSF N04-1/2	1/2	82.8	40.5	24	11	3.5	NPT 1/2	14	7/8	3	15

HVSS Nipple

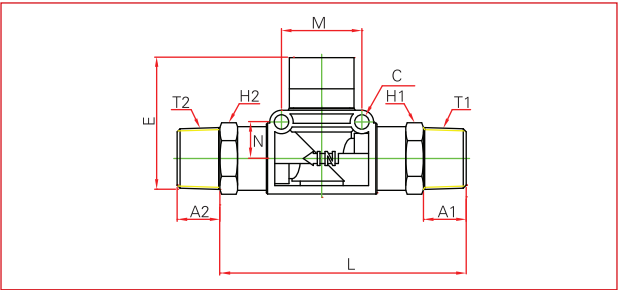

MODEL	L	E	M	N	C	T1	A1	H1 (Hex)	T2	A2	H2 (Hex)	Q'ty per bag	Q'ty per box
HVSS N01-N01	67.4	37.5	19	8	3.5	NPT 1/8	8	1/2	NPT 1/8	8	1/2	5	25
HVSS N02-N01	69.8	37.5	19	8	3.5	NPT 1/4	10	9/16	NPT 1/8	8	1/2	5	25
HVSS N02-N02	72.2	37.5	19	8	3.5	NPT 1/4	10	9/16	NPT 1/4	10	9/16	5	25
HVSS N03-N02	89	40.5	24	11	3.5	NPT 3/8	11	11/16	NPT 1/4	10	9/16	5	20
HVSS N03-N03	90	40.5	24	11	3.5	NPT 3/8	11	11/16	NPT 3/8	11	11/16	5	20
HVSS N04-N03	93.5	40.5	24	11	3.5	NPT 1/2	14	7/8	NPT 3/8	11	11/16	3	15
HVSS N04-N04	97	40.5	24	11	3.5	NPT 1/2	14	7/8	NPT 1/2	14	7/8	3	15

SILENCERS

Used in pneumatic piping &

Used for a wide variety of models to meet all needs.



PRODUCT DESCRIPTION

FEATURES / BENEFITS

- Porous metal parts have their high strength, uniform pore distribution, high temperature resistant, anti-thermal-shock, easy fabricating, easy regeneration and longer service life advantages
- Typical regeneration methods being used include high pressure cleaning, ultrasonic cleaning, chemical cleaning and high temperature cleaning
- Adequate regeneration can prolong the service life of parts more effectiverty

APPLICATION

Sintered metal porous metals are usually provided for the following application:

1. Gas, liquid and gas/liquid separation
2. Gas dispersion
3. Vibration and sound dampening
4. Anti-combustion

ORDER

PLACING AN ORDER OR REQUEST


Specifying Standard Items:

Please specify the following:


1. Model
2. Thread size
3. Material

Example of an request


BV series silencer:
Brass ,1/4"PT thread

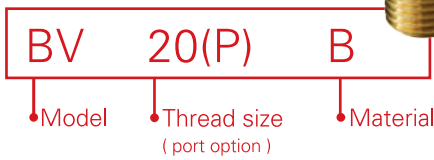

BM series silencer:
Steel ,1/4"NPT thread

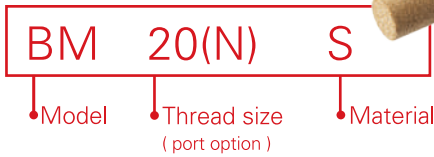

BV series silencer:
Stainless Steel ,1/4"NPT thread

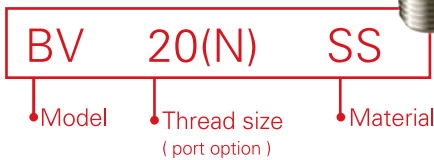

CONNECTION

BSPT	NPT
08=M5	08=10-32UNF
18=1/8"	18=1/8"
28=1/4"	28=1/4"
38=3/8"	38=3/8"
48=1/2"	48=1/2"
68=3/4"	68=3/4"
88=1"	88=1"
128=1-1/4"	128=1-1/4"
148=1-1/2"	148=1-1/2"
200=2"	200=2"

PORT OPTION	MATERIAL
(P)=BSPT	B=Brass
(N)=NPT	S=Steel
	SS=Stainless Steel
	AL=Aluminium
	P=Plastic

BM

FILTERING GRADE 40 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	BM-08	BM-18	BM-28	BM-38	BM-48	BM-68	BM-88	BM-128	BM-148	BM-200
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"

BV

FILTERING GRADE 40 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	BV-08	BV-18	BV-28	BV-38	BV-48	BV-68	BV-88	BV-128	BV-148	BV-200
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"

SCM

FILTERING GRADE 40 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	SCM-08	SCM-18	SCM-28	SCM-38	SCM-48	SCM-68	SCM-88
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"

SBR

FILTERING GRADE 70 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	SBR-18	SBR-28	SBR-38	SBR-48
CONNECTION	1/8"	1/4"	3/8"	1/2"

SPBM

FILTERING GRADE 4 0 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	SPBM-18	SPBM-28	SPBM-38	SPBM-48
CONNECTION	1/8"	1/4"	3/8"	1/2"

SBC

FILTERING GRADE 40 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	SBC-18	SBC-28	SBC-38
CONNECTION	1/8"	1/4"	3/8"

STEEL SILENCERS

Steel With Nickel Plated Body With Bronze Sintered Filtering

BM

FILTERING GRADE 40 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	BM-08	BM-18	BM-28	BM-38	BM-48	BM-68	BM-88	BM-128	BM-148	BM-200
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"

BV

FILTERING GRADE 40 MICRON
MAX PRESSURE 300psi (20kg/cm²)
OPERATING TEMPERATURE -30°C~150°C



MODEL	BV-08	BV-18	BV-28	BV-38	BV-48	BV-68	BV-88	BV-128	BV-148	BV-200
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"

STAINLESS STEEL SILENCERS

Stainless Steel Sus303 Body And Sus316 Filter

BM

FILTERING GRADE 70 MICRON
MAX PRESSURE 250psi(16.5kg/cm²)
OPERATING TEMPERATURE1.6°C ~200°C



MODEL	BM-05	BM-18	BM-28	BM-38	BM-48	BM-68	BM-88
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"

STAINLESS STEEL SILENCERS

Stainless Steel Sus303 Body And Sus316 Filter

BV

FILTERING GRADE 70 MICRON
MAX PRESSURE 250psi(16.5kg/cm²)
OPERATING TEMPERATURE1.6°C ~200°C



MODEL	BV-08	BV-18	BV-28	BV-38	BV-48	BV-68	BV-88
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"

Stainless Steel Sus303 Body And Sus316 Filter

SCM

FILTERING GRADE 70 MICRON
MAX PRESSURE 250psi(16.5kg/cm²)
OPERATING TEMPERATURE1.6°C ~200°C



MODEL	SCM-08	SCM-18	SCM-28	SCM-38	SCM-48	SCM-68	SCM-88
CONNECTION	M5	1/8"	1/4"	3/8"	1/2"	3/4"	1"

Steel Plated Body And Sus304 Filter

SBN

FILTERING GRADE 70 MICRON
MAX PRESSURE 250psi(16.5kg/cm²)
OPERATING TEMPERATURE1.6°C ~200°C



MODEL	SBN-18	SBN-28	SBN-38	SBN-48	SBN-68	SBN-88
CONNECTION	1/8"	1/4"	3/8"	1/2"	3/4"	1"

PLASTIC SILENCERS

PM

MAX PRESSURE 150psi (10kg/cm²)
OPERATING TEMPERATURE 0°C~80°C



MODEL	PM-18	PM-28	PM-38	PM-48
CONNECTION	1/8"	1/4"	3/8"	1/2"

PS



ITEM	MODEL	PS-18	PS-28	PS-38	PS-48
FLUID		AIR	AIR	AIR	AIR
CONNECTION		1/8"PT	1/4"PT	3/8"PT	1/2"PT
OVERALL LENGTH		33.5mm	61.2mm	80.5mm	86mm
DIAMETER		10.6mm	21.6mm	24.5mm	30mm
HEX		X	18.5mm	19.5mm	24.5mm
MATERIAL	BODY	POM	POM	POM	POM
	ELEMENT	RESIN	RESIN	RESIN	RESIN
MAX OPERATION PRESSURE		10KG	10KG	10KG	10KG
AIR FLOW(0.5bar)		80L/MIN.	90L/MIN.	93L/MIN.	95L/MIN.
WEIGHT(APPROX)		2g	13g	20g	29g
UNIT PACK(PE BAG)		10PCS	10PCS	10PCS	5PCS
INNER BOX PACK		200PCS	200PCS	100PCS	25PCS
CARTON PACK		1600PCS	1600PCS	800PCS	200PCS

TC-I

AVAILABLE TUBING POLYURETHANE AND NYLON
CUTTING OUTER DIA 3MM~15MM
BODY MATERIAL POLYACETAL
BLADE MATERIAL STAINLESS STEEL
STANDARD COLOR BLACK
WEIGHT 33g/PC
PACKAGE 20PC, /SHPI COLOR BOX,
..... 160PC, /MASTER CARTON



TC-II

AVAILABLE TUBING POLYURETHANE AND NYLON
CUTTING OUTER DIA 3MM~16MM
BODY MATERIAL POLYACETAL
BLADE MATERIAL STAINLESS STEEL
STANDARD COLOR BLACK
EQUIPPED WITH 1M MEASURING TAPE WITH LOCK&OPEN MECHANISM
WEIGHT 55g/PC
PACKAGE 6PC, /SHPI COLOR BOX,
..... 48PC, /MASTER CARTON





SHPI HOSE PRODUCTS



SHPI AIR BRAKE PRODUCTS



SHPI

TRIED. TESTED.
AND
WANTED.

WWW.SHPI.COM.TW





D.O.T. AIR BRAKE PUSH-IN FITTINGS

CONNECTOR TYPE



PRODUCT DESCRIPTION

FEATURES / BENEFITS

- SHPI’s D.O.T. Air brake fittings manufacturing meets D.O.T. FMVSS 571.106 Air brake specifications and SAE J2494 standards.
- Machined from C3600/C3700 brass alloy
- Pre-applied thread sealant on all male pipe threads
- One-touch connection reduces installation time and cost
- Various shapes and configurations to meet vehicle applications and make installation easier

SPECIFICATION

- Working pressure:up to 150 psi
- Working temperature range:-40 F to +200 F
- Threads:NPTF Standard.For other threads standards consult factory.
- Recommended Tubings:SAE J844 nonmetallic air brake systems

PRINT: Logo + DOT + hose OD + lot no.

PACKAGING

There is no special require for DOT FMVSS 571.106 specification
SHPI standard packaging:bulk packing with polybag

ORDER

PLACING AN ORDER OR REQUEST

- Specifying Standard Items:
Please specify the following:
1. Model
 2. Tube O.D.
 3. Thread size

THREAD SIZE

- 02:1/8"
- 04:1/4"
- 06:3/8"
- 08:12"
- 10:5/8"
- 12:3/4"

Example of an request

Male Connector 68 Series
1/4" tube with 1/2" thread

35-680408

ModelTube DiaThread size



Male Connector M68 Series
8mm tube with 1/4" BSPT thread

35-M680804


ModelTube DiaThread size



Male Connector 68 Series
1/4" tube with M12x1.5

35-6804M12 x 1.5

ModelTube DiaThread size

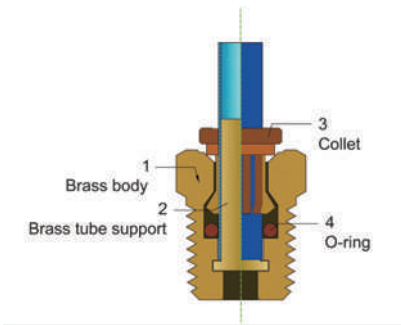

AIR BRAKE PUSH-IN FITTINGS

> Male Connector M68 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-M680401	4 mm	1/16"
35-M680402	4 mm	1/8"
35-M680602	6 mm	1/8"
35-M680604	6 mm	1/4"
35-M680606	6 mm	3/8"
35-M680608	6 mm	1/2"
35-M680802	8 mm	1/8"
35-M680804	8 mm	1/4"
35-M680806	8 mm	3/8"
35-M681004	10 mm	1/4"
35-M681006	10 mm	3/8"
35-M681008	10 mm	1/2"
35-M681204	12 mm	1/4"
35-M681206	12 mm	3/8"
35-M681208	12 mm	1/2"



MODEL	TUBE O.D.	PIPE THREAD BSPT
35-M680602BSPT	6 mm	1/8"
35-M680604BSPT	6 mm	1/4"
35-M680802BSPT	8 mm	1/8"
35-M680804BSPT	8 mm	1/4"
35-M680806BSPT	8 mm	3/8"
35-M680808BSPT	8 mm	1/2"
35-M681004BSPT	10 mm	1/4"
35-M681006BSPT	10 mm	3/8"
35-M681204BSPT	12 mm	1/4"
35-M681206BSPT	12 mm	3/8"
35-M681208BSPT	12 mm	1/2"



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-M6806M10	6 mm	M10 x 1.0
35-M6806M12	6 mm	M12 x 1.5
35-M6806M14	6 mm	M14 x 1.5
35-M6806M16	6 mm	M16 x 1.5
35-M6806M22	6 mm	M22 x 1.5
35-M6808M10	8 mm	M10 x 1.0
35-M6808M12	8 mm	M12 x 1.5
35-M6808M14	8 mm	M14 x 1.5
35-M6808M16	8 mm	M16 x 1.5
35-M6808M22	8 mm	M22 x 1.5
35-M6810M10	10 mm	M10 x 1.0
35-M6810M12	10 mm	M12 x 1.5
35-M6810M14	10 mm	M14 x 1.5
35-M6810M16	10 mm	M16 x 1.5
35-M6810M22	10 mm	M22 x 1.5
35-M6812M12	12 mm	M12 x 1.5
35-M6812M14	12 mm	M14 x 1.5
35-M6812M16	12 mm	M16 x 1.5
35-M6812M22	12 mm	M22 x 1.5
35-M6816M16	16 mm	M16 x 1.5
35-M6816M22	16 mm	M22 x 1.5

AIR BRAKE PUSH-IN FITTINGS

> Male Connector 68 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-6853202	5/32"	1/8"
35-680402	1/4"	1/8"
35-680404	1/4"	1/4"
35-680406	1/4"	3/8"
35-680408	1/4"	1/2"
35-680602	3/8"	1/8"
35-680604	3/8"	1/4"
35-680606	3/8"	3/8"
35-680608	3/8"	1/2"
35-680612	3/8"	3/4"
35-680804	1/2"	1/4"
35-680806	1/2"	3/8"
35-680808	1/2"	1/2"
35-681006	5/8"	3/8"
35-681008	5/8"	1/2"
35-681012	5/8"	3/4"
35-681208	3/4"	1/2"
35-681212	3/4"	3/4"



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-6804M12	1/4"	M12 x 1.5
35-6804M16	1/4"	M16 x 1.5
35-6806M12	3/8"	M12 x 1.5
35-6806M14	3/8"	M14 x 1.5
35-6806M16	3/8"	M16 x 1.5
35-6806M22	3/8"	M22 x 1.5
35-6808M12	1/2"	M12 x 1.5
35-6808M16	1/2"	M16 x 1.5
35-6808M22	1/2"	M22 x 1.5



ECONOMIC ARTICULATED VEHICLE BRAKE COILS

AIR BRAKE PUSH-IN FITTINGS

> Bulkhead Union 82 Series



MODEL	TUBE O.D.
35-8204	1/4"
35-8206	3/8"
35-8208	1/2"

> Tube Union 62 Series



MODEL	TUBE O.D.
35-6202	1/8"
35-62532	5/32"
35-6203	3/16"
35-6204	1/4"
35-6206	3/8"
35-6208	1/2"
35-6210	5/8"

> Tube Union M62 Series



MODEL	TUBE O.D.
35-M6204	4 mm
35-M6206	6 mm
35-M6208	8 mm
35-M6209	9 mm
35-M6210	10 mm
35-M6211	11 mm
35-M6212	12 mm
35-M6215	15 mm
35-M6216	16 mm

> Female Connector 66 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-660402	1/4"	1/8"
35-660404	1/4"	1/4"
35-660602	3/8"	1/8"
35-660604	3/8"	1/4"
35-660606	3/8"	3/8"
35-660608	3/8"	1/2"
35-660804	1/2"	1/4"
35-660806	1/2"	3/8"
35-660808	1/2"	1/2"

D.O.T. AIR BRAKE PUSH-IN FITTINGS

ELBOW TYPE



PRODUCT DESCRIPTION

FEATURES / BENEFITS

- SHPI’s D.O.T. Air brake fittings manufacturing meets D.O.T. FMVSS 571.106 Air brake specifications and SAE J2494 standards
- Machined from C3600/C3700 brass alloy
- Pre-applied thread sealant on all male pipe threads
- One-touch connection reduces installation time and cost
- Various shapes and configurations to meet vehicle applications and make installation easier

SPECIFICATION

- Working pressure:up to 150 psi
- Working temperature range: -40°F to +200°F
- Threads:NPTF Standard.For other threads standards consult factory.
- Recommended Tubings:SAE J844 nonmetallic air brake systems

PRINT: Logo + DOT + hose OD + lot no.

PACKAGING

There is no special require for DOT FMVSS 571.106 specification
SHPI standard packaging:bulk packing with polybag

ORDER

PLACING AN ORDER OR REQUEST

Specifying Standard Items:
Please specify the following:
1. Model Number
2. Tube O.D.
3. Thread size

THREAD SIZE

02:1/8”
04:1/4”
06:3/8”
08:1/2”
10:5/8”
12:3/4”

Example of an request

45 degree Male Elbow 54 Series
O.D. 3/8” tube with 1/4” thread

35-540604

Model

Tube O.D.

Thread size



AIR BRAKE PUSH-IN FITTINGS

> 45° MALE ELBOW 54 Series




MODEL	TUBE O.D.	PIPE THREAD NPTF
35-540402	1/4"	1/8"
35-540404	1/4"	1/4"
35-540406	1/4"	3/8"
35-540602	3/8"	1/8"
35-540604	3/8"	1/4"
35-540606	3/8"	3/8"
35-540608	3/8"	1/2"
35-540804	1/2"	1/4"
35-540806	1/2"	3/8"
35-540808	1/2"	1/2"
35-541006	5/8"	3/8"
35-541008	5/8"	1/2"
35-541208	3/4"	1/2"

> 45° SWIVEL MALE ELBOW S54 Series



MODEL	TUBE O.D.	PIPE THREAD MPTF
35-S540402	1/4"	1/8"
35-S540404	1/4"	1/4"
35-S540602	3/8"	1/8"
35-S540604	3/8"	1/4"
35-S540606	3/8"	3/8"
35-S540804	1/2"	1/4"
35-S540806	1/2"	3/8"
35-S540808	1/2"	1/2"
35-S541008	5/8"	1/2"
35-S541208	3/4"	1/2"

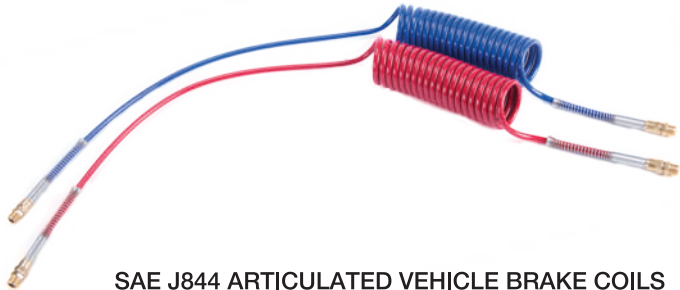

SAE J844 ARTICULATED VEHICLE BRAKE COILS

AIR BRAKE PUSH-IN FITTINGS

> UNION ELBOW 65 Series




MODEL	TUBE O.D.
35-650532	5/32"
35-6504	1/4"
35-6506	3/8"
35-6508	1/2"
35-6810	5/8"

> UNION ELBOW M65 Series



MODEL	TUBE O.D.
35-M6504	4 mm
35-M6506	6 mm
35-M6508	8 mm
35-M6510	10 mm
35-M6512	12 mm

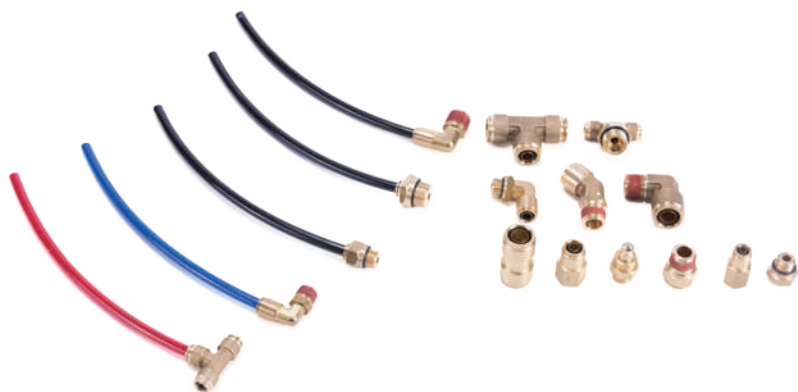

SAE J844 NYLON TUBING FOR AIR BRAKE & D.O.T.PUSH-IN FITTINGS

AIR BRAKE PUSH-IN FITTINGS

> MALE ELBOW 69 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-6953202	5/32"	1/8"
35-690302	3/16"	1/8"
35-690304	3/16"	1/4"
35-690402	1/4"	1/8"
35-690404	1/4"	1/4"
35-690406	1/4"	3/8"
35-690602	3/8"	1/8"
35-690604	3/8"	1/4"
35-690606	3/8"	3/8"
35-690608	3/8"	1/2"
35-690804	1/2"	1/4"
35-690806	1/2"	3/8"
35-690808	1/2"	1/2"
35-691006	5/8"	3/8"
35-691008	5/8"	1/2"
35-691208	3/4"	1/2"

> SWIVEL MALE ELBOW S69 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-S690302	3/16"	1/8"
35-S690304	3/16"	1/4"
35-S690402	1/4"	1/8"
35-S690404	1/4"	1/4"
35-S690406	1/4"	3/8"
35-S690408	1/4"	1/2"
35-S690602	3/8"	1/8"
35-S690604	3/8"	1/4"
35-S690606	3/8"	3/8"
35-S690608	3/8"	1/2"
35-S690804	1/2"	1/4"
35-S690806	1/2"	3/8"
35-S690808	1/2"	1/2"
35-S691006	5/8"	3/8"
35-S691008	5/8"	1/2"
35-S691208	3/4"	1/2"
35-S691212	3/4"	3/4"



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-S6906M12	3/8"	M12 x 1.5
35-S6906M14	3/8"	M14 x 1.5
35-S6906M16	3/8"	M16 x 1.5
35-S6906M22	3/8"	M22 x 1.5

AIR BRAKE PUSH-IN FITTINGS

> SWIVEL MALE ELBOW MS69 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-MS690602	6 mm	1/8"
35-MS690604	6 mm	1/4"
35-MS690606	6 mm	3/8"
35-MS690608	6 mm	1/2"
35-MS690804	8 mm	1/4"
35-MS690806	8 mm	3/8"
35-MS691004	10 mm	1/4"
35-MS691006	10 mm	3/8"
35-MS691008	10 mm	1/2"
35-MS691204	12 mm	1/4"
35-MS691206	12 mm	3/8"
35-MS691208	12 mm	1/2"



MODEL	TUBE O.D.	PIPE THREAD BSPT
35-MS690602BSPT	6 mm	1/8"
35-MS690604BSPT	6 mm	1/4"
35-MS690804BSPT	8 mm	1/4"
35-MS690806BSPT	8 mm	3/8"
35-MS690808BSPT	8 mm	1/2"
35-MS691004BSPT	10 mm	1/4"
35-MS691006BSPT	10 mm	3/8"
35-MS691204BSPT	12 mm	1/4"
35-MS691206BSPT	12 mm	3/8"
35-MS691208BSPT	12 mm	1/2"

> SWIVEL MALE ELBOW MS69 Series



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-MS6906M10	6 mm	M10 x 1.0
35-MS6906M12	6 mm	M12 x 1.5
35-MS6906M14	6 mm	M14 x 1.5
35-MS6906M16	6 mm	M16 x 1.5
35-MS6908M12	8 mm	M12 x 1.5
35-MS6908M16	8 mm	M16 x 1.5
35-MS6908M22	8 mm	M22 x 1.5
35-MS6910M12	10 mm	M12 x 1.5
35-MS6910M16	10 mm	M16 x 1.5
35-MS6910M22	10 mm	M22 x 1.5
35-MS6912M12	12 mm	M12 x 1.5
35-MS6912M16	12 mm	M16 x 1.5
35-MS6912M22	12 mm	M22 x 1.5
35-MS6916M22	16 mm	M22 x 1.5

AIR BRAKE PUSH-IN FITTINGS

> FEMALE ELBOW 70 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-700402	1/4"	1/8"
35-700404	1/4"	1/4"
35-700602	3/8"	1/8"
35-700604	3/8"	1/4"
35-700606	3/8"	3/8"
35-700804	1/2"	1/4"
35-700806	1/2"	3/8"
35-700808	1/2"	1/2"

> SWIVEL FEMALE ELBOW S70 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-S700604	3/8"	1/4"



SAE J844 NYLON TUBING FOR AIR BRAKE & D.O.T.PUSH-IN FITTINGS

D.O.T. AIR BRAKE PUSH-IN FITTINGS

UNION TYPE



PRODUCT DESCRIPTION

FEATURES / BENEFITS

- SHPI's D.O.T. Air brake fittings manufacturing meets D.O.T. FMVSS 571.106 Air brake specifications and SAE J2494 standards.
- Machined from C3600/C3700 brass alloy
- Pre-applied thread sealant on all male pipe threads
- One-touch connection reduces installation time and cost
- Various shapes and configurations to meet vehicle applications and make installation easier

SPECIFICATION

- Working pressure:up to 150 psi
- Working temperature range: -40°F to +200°F
- Threads:NPTF Standard.For other threads standards consult factory.
- Recommended Tubings:SAE J844 nonmetallic air brake systems

PRINT: Logo + DOT + hose OD + lot no.

PACKAGING

There is no special require for DOT FMVSS 571.106 specification
SHPI standard packaging:bulk packing with polybag

ORDER

PLACING AN ORDER OR REQUEST


Specifying Standard Items:
Please specify the following:
1. Model Number
2. Tube O.D.
3. Thread size

THREAD SIZE

- 02:1/8"
- 04:1/4"
- 06:3/8"
- 08:1/2"
- 10:5/8"
- 12:3/4"

Example of an request

Swivel Male Run Tee S71 Series
O.D. 3/8" tube with 1/4" thread



AIR BRAKE PUSH-IN FITTINGS

> UNION TEE 64 Series




MODEL	TUBE O.D.
35-6402	1/8"
35-64532	5/32"
35-6403	3/16"
35-6404	1/4"
35-6406	3/8"
35-6408	1/2"
35-6410	5/8"

> UNION TEE M64 Series



MODEL	TUBE O.D.
35-M6404	4 mm
35-M6406	6 mm
35-M6408	8 mm
35-M6410	10 mm
35-M6412	12 mm

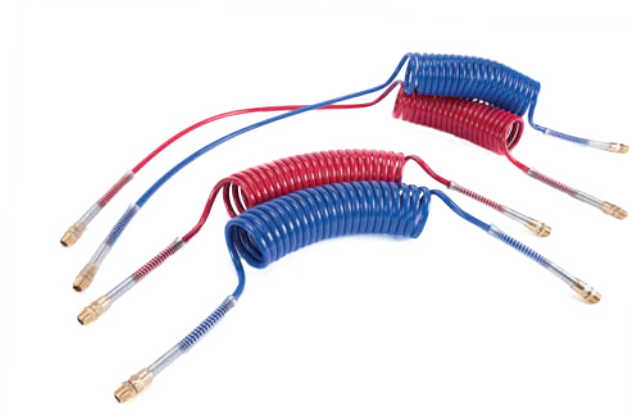

SAE J844 ARTICULATED VEHICLE BRAKE COILS

AIR BRAKE PUSH-IN FITTINGS

> MALE RUN TEE 71 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-710402	1/4"	1/8"
35-710404	1/4"	1/4"
35-710604	3/8"	1/4"
35-710606	3/8"	3/8"
35-710804	1/2"	1/4"
35-710806	1/2"	3/8"
35-710808	1/2"	1/2"

> SWIVEL MALE RUN TEE S71 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-S710402	1/4"	1/8"
35-S710404	1/4"	1/4"
35-S710406	1/4"	3/8"
35-S710604	3/8"	1/4"
35-S710606	3/8"	3/8"
35-S710804	1/2"	1/4"
35-S710806	1/2"	3/8"
35-S710808	1/2"	1/2"

> SWIVEL MALE RUN TEE MS71 Series



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-MS7106M12	6 mm	M12 x 1.5
35-MS7110M16	10 mm	M16 x 1.5
35-MS7112M16	12 mm	M16 x 1.5
35-MS7112M22	12 mm	M22 x 1.5

AIR BRAKE PUSH-IN FITTINGS

> MALE BRANCH TEE 72 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-720404	1/4"	1/4"
35-720602	3/8"	1/8"
35-720604	3/8"	1/4"
35-720606	3/8"	3/8"
35-720608	3/8"	1/2"
35-720806	1/2"	3/8"
35-720608	1/2"	1/2"

> SWIVEL MALE BRANCH TEE S72 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-S720402	1/4"	1/8"
35-S720404	1/4"	1/4"
35-S720406	1/4"	3/8"
35-S720602	3/8"	1/8"
35-S720604	3/8"	1/4"
35-S720606	3/8"	3/8"
35-S720804	1/2"	1/4"
35-S720806	1/2"	3/8"
35-S720808	1/2"	1/4"



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-S7206M22	3/8"	M22 x 1.5

AIR BRAKE PUSH-IN FITTINGS

> SWIVEL MALE BRANCH TEE MS72 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-MS720602	6 mm	1/8"
35-MS720604	6 mm	1/4"
35-MS720804	8 mm	1/4"
35-MS721004	10 mm	1/4"
35-MS721204	12 mm	1/4"



MODEL	TUBE O.D.	PIPE THREAD METRIC
35-MS7206M12	6 mm	M12 x 1.5
35-MS7210M16	10 mm	M16 x 1.5
35-MS7212M16	12 mm	M16 x 1.5
35-MS7212M22	12 mm	M22 x 1.5



SAE J844 NYLON TUBING FOR AIR BRAKE

AIR BRAKE PUSH-IN FITTINGS

> FEMALE BRANCH TEE 77 Series



MODEL	TUBE O.D.	PIPE THREAD NPTF
35-770604	3/8"	1/4"

> UNEQUAL TEE 79 Series



MODEL	TUBE O.D.
35-790604	3/8" x 1/4" x 3/8"

> UNEQUAL TEE M79 Series



MODEL	TUBE O.D.
35-M791206	12mm x 3/8"OD x 12mm



SHPI
TRIED. TESTED.
AND
WANTED.



Shan Hua Plastic Industrial

No.20 Jhongshan 7th St., Gueiren Dist.,
Tainan City 71152, Taiwan.

Tel: +886-6-230-4567 Fax: +886-6-230-7799

www.shpi.com.tw

Japan Branch Company: Zenka • Japan Co., Ltd.

〒192-0362 No.28-1, Matsuki, Hachioji City, Tokyo, Japan

Tel: 81-42-689-4731 Fax: 81-42-675-3655

<http://ftp.zenkajapan.jp>